
MIL-T-55164/5C
13 August 1973
SUPERSEDING
MIL-T-55164/5B
30 June 1967

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER, SCREW TYPE, CLASS 41TB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the terminal boards described herein shall consist of this document and the latest issue of Specification MIL-T-55164.

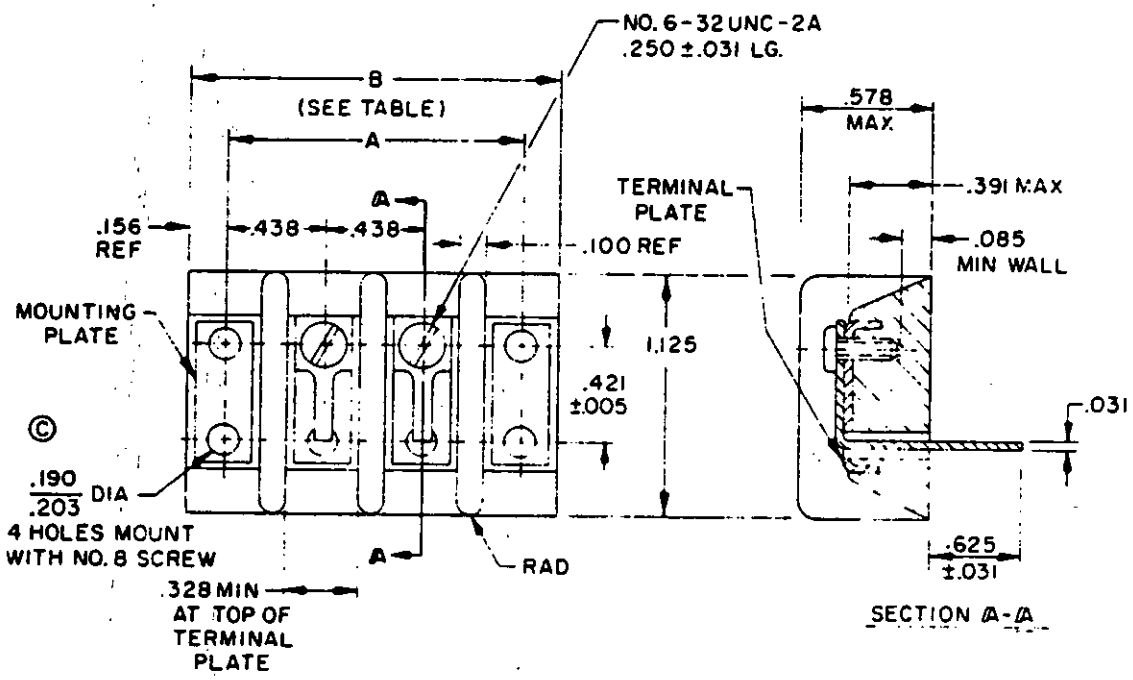

INCHES	MM	INCHES	MM
.005	.13	.250	6.35
.016	.41	.328	8.33
.031	.79	.391	9.93
.085	2.16	.421	10.69
.100	2.54	.438	11.13
.156	3.96	.578	14.68
.194	4.93	.625	15.88
.203	5.16	1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx±.016.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

© denotes changes.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Type designation	Dimensions 1/ A inch	A (mm)	B inch	B (mm)	Federal stock number FSN-5940
41ГВ2	1.312	(33.32)	1.641	(41.68)	983-6123
41ГВ3	1.750	(44.45)	2.078	(52.78)	983-6124
41ГВ4	2.188	(55.58)	2.516	(63.91)	983-6125
41ГВ5	2.625	(66.68)	2.953	(75.01)	983-6126
41ГВ6	3.062	(77.77)	3.391	(86.13)	983-6127
41ГВ7	3.500	(88.90)	3.828	(97.23)	983-6128
41ГВ8	2/ 3.953	(100.41)	4.266	(108.36)	983-6129
41ГВ9	4.391	(111.53)	4.703	(119.46)	983-6130
41ГВ10	4.828	(122.63)	5.141	(130.58)	983-6131
41ГВ11	5.266	(133.76)	5.594	(142.09)	983-6132
41ГВ12	5.703	(144.86)	6.031	(153.19)	983-6133
3/ 41ГВ13	6.141	(155.98)	6.469	(164.31)	983-6134
41ГВ14	6.578	(167.08)	6.906	(175.41)	983-6135
3/ 41ГВ15	7.016	(178.21)	7.344	(186.54)	983-6136
41ГВ16	7.453	(189.31)	7.781	(197.64)	983-6137
3/ 41ГВ17	7.891	(200.43)	8.219	(208.76)	983-6138
41ГВ18	8.328	(211.53)	8.656	(219.86)	983-6139
3/ 41ГВ19	2/ 8.781	(223.04)	9.109	(231.37)	983-6140
41ГВ20	9.219	(234.16)	9.547	(242.49)	983-6141
3/ 41ГВ21	9.656	(245.26)	9.984	(253.59)	983-6142
3/ 41ГВ22	10.094	(256.39)	10.422	(264.72)	---
3/ 41ГВ23	10.531	(267.49)	10.859	(275.82)	---

1/ Tolerances on terminal boards up to and including 6 inches in length:
for A dimension +.031, -.016
for B dimension +.031, -.062
Over 6 inches in length:
for A dimension +.047, -.031
for B dimension +.047, -.062

2/ The increase of .016 inch dimension of these points is to take into consideration accumulative tolerances of the terminal board. It in no way affects the nominal .438 inch dimension between terminal rows. The nominal .438 inch dimension from terminal point to point is maintained to permit the use of such auxiliary hardware as fanning strips, identification plates, etc., where such hardware is required.

3/ Not to be used for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Voltage rating (maximum): 600 volts.

Current rating: 10 amps.

Plastic material: Type GDI-30F of MIL-P-19833.

Dielectric withstanding test voltage: 3,400 volts rms.

Custodians:
Army - EL
Navy - SH
Air Force - 17

Review activities:
Army - MU
Navy - AS, OS, EC
Air Force - 80
DSA - GS

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force -

Preparing activity:
Army - EL

DSA - ES

(Project 5940-0745)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Electronics Research & Development Command
ATTN: DRDEL-ED
Adelphi, MD 20783

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FO CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.