A-A-2326
September 27, 1985

COMMERCIAL ITEM DESCRIPTION

RASP, HAND, CABINET

The General Services Administration has authorized the use of this commercial item description in preference to Type XXIV, Style B of Federal Specification GGG-F-325.

This commercial item description covers hand rasps used for cabinet making and woodworking.

Salient characteristics:

Material: Carbon alloy steel.

Width: Tapered toward the point.

Thickness: Tapered toward the point.


Design: Two edges, each single-cut (one set of parallel cuts on the surface).

Tang: Of a conventional shape and size suitable for attachment to a wood handle. Tempered to a maximum hardness of 45 on the Rockwell C scale at a point approximately midway of its length and width.

Teeth: Formed by raising portions of the metal from the surface of the blank. Entirely separate from one another. Top of each tooth rounded. Uniformly cut and of uniform height throughout. Cutting surfaces hardened to a uniform hardness. The distance between the heel and point of the rasp, excluding the tang, shall be hardened to not greater than 68 nor less than 64 on the Rockwell C scale. Free from decarburization and brittleness.

Marking: Marked with the country of origin and the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined.

Workmanship: The teeth of the rasp shall be well-defined, sharp, and uniform in height and form. There shall be no evidence of rust or other defect which may impair serviceability, durability, or appearance.

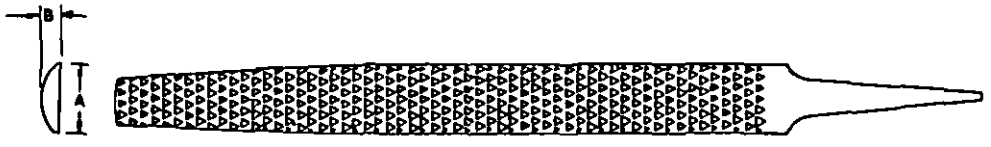

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:21Z
Check the source to verify that this is the currentversion before use.

National Stock Number	Length	Dimensions at largest section A	Dimensions at largest section B	Back Teeth per row	Back Rows per inch	Flat Teeth per row	Flat Rows per inch	Allowable warpage (maximum)
	Inches	Inches	Inch					Degrees
			Second-cut					
5110-00-233-9716	8	15/16	1/4	9	8-2/3	8	8-2/3	3
5110-00-233-9717	10	1-1/8	9/32	11	6-2/3	10	6-2/3	3
5110-00-233-9714	12	1-5/16	11/32	11	6-2/3	10	6-2/3	3

Length dimension: Measured from the point (free or front end) to the heel (junction of the tang with the body of the rasp) and have a tolerance of plus or minus 1/8 inch.

Tolerance: Width (A) - plus or minus 1/8 inch.
Thickness (B) - plus or minus 1/8 inch.
Teeth - plus or minus one tooth per row and one row per inch.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:21Z
Check the source to verify that this is the current version before use.