Fed Std 185a
20 August 1977
SUPERSEDING
FED-STD-185
8 November 1960

FEDERAL STANDARD

IDENTIFICATION MARKING OF COPPER AND COPPER BASE ALLOY MILL PRODUCTS

Authority.-This standard is issued pursuant to the Federal Property and Administrative Services Act of 1949, as amended, and its application to the purchase of commodities referred to herein is mandatory on all Federal agencies.

CONTENTS

1.	General	2.2.3	Specification data
1.1	Purpose	3.	General Requirements
1.2	Scope	3.1	Marking Information
1.3	Application	3.1	Legibility
2.	Definitions and Marking Terms	3.3	Deleterious effect
2.1	Definitions	4.	Changes
2.2	Producer's name or trademark	5.	Conflict with Referenced Specifications
2.2.2	Condition designator		

Table I.-Marking Information

Figure 1.-Examples of Table I marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

1. General.

1.1 Purpose.-The purpose of this standard is to provide uniform physical item identification marking of copper and copper-base alloy mill products for the government activities.

1.2 Scope.-This standard establishes the physical item marking requirements for identification purposes for copper and copper-base alloy mill products procured and issued for government activities. Shipment and inspection acceptance markings are not within the scope of this standard.

1.3. Application.-The marking specified herein applies to direct shipment for government activities and applies also where specified to contracts or orders between the manufacturer and the government prime contractor. (See 4.1.)

2. Definitions and Mrking Terms.

2.1 Definitions.-Definitions of commodity forms and shapes shall be those commercially acceptable to the Copper and Copper-Base Alloy Mill Products Industry and in common use in the industry.

2.2 Marking terms.-Marking terms as used in this standard are defined as follows:

2.2.1 Producer's name or trademark.-The producer's name or registered trademark used shall be that of the producer which performs the final processing or finishing operation prior to marketing the product.

2.2.2 Condition designator.-The physical condition designator is that designator of temper or other physical condition as indicated by a product specification or as approved by a nationally recognized industrial association such as the Copper and Brass Research Association.

2.2.3 Specification data.-Specification data shall include:

(a) Product specification number. (Base number only not including the letter suffix appended to this number to indicate latest revision.)

(b) Nominal composition or alloy designation.

(c) Temper designation.

3. General Requirements.

3.1 Marking information-Physical item identification marking requirements and application thereof to copper and copper-base alloy mill products shall be in accordance with Table I, when

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

this standard is specified in the material specification, contract or order.

3.2 Legibility.-Physical item marking on copper and copper-base alloy mill products shall be legible and of such characteristics as to resist effacement by contact incident to normal handling, shipment, and storage.

3.3 Deleterious effect.-Reasonable precaution shall be exercised in the physical item identification marking of copper and copper-base alloy mill products so that the marking will not be deleterious to the functioning of those products in their normal use.

4. Changes.-When a Federal agency considers that a Federal Standard does not provide for its essential needs, written request for changing or adding to the standard, supported by adequate justification, shall be sent to the Administration. This justification will explain wherein the standard does not provide for essential needs. The request should be sent in duplicate to the General Services Administration, Federal Supply Service, Standardization Division, Washington D. C. 20406. The Administration will determine the appropriate action to be taken and will notify the agency.

5. Conflict With Referenced Specifications.-Where the requirements stated in this standard conflict with any requirements in a referenced specification, the requirements of the standard shall apply. Nature of conflict between the standard and the referenced specification shall be submitted in duplicate to General Services Administration, Federal Supply Service, Standardization Division, Washington D. C. 20406.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of Markings
(1) Rod: Round hexagonal, and octagonal (see item 8)	--	--	On rod: (a) ½ inch or or more in diameter. (b) ½ inch or more in width of flat. (c) Over 3 feet in length. Markings to be in recurring intervals not greater than 3 feet throughout the length. Rod with any dimension less than the above: (d) When packed in containers shall have one tag inside the container. (e) When packed in secured life or bunndles shall be tagged in two places, one inside and one outside the bundle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
(2) Flat products: Flat wire, strip, sheet, bar, plate (see item 8) (a) Straight lengths	---	(1)	On flat products in straight lengths: (a) 0.020 inch and over in thickness. (b) 6 inch to 12 inch inclusive in over 3 feet. (c) Over 12 inch in lengths over 1 foot. Markings shall appear on one surface at recurring intervals not greater than 3 feet along one lengthwise edge for material 6 to 12 inch inclusive in width, and two lengths edges for material over 12 inch in width. Flat products with any dimensions less than the above: (d) When packed in containers shall have one tag inside the container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
			(d) When packed in secured lifts or bundles shall be tagged in two places, one inside and one outside the bundle.
(b) Flat circles	--	(1)	On flat circles: (a) 0.020 inch and over in thickness. (b) Over 12 inch in diameter. Markings to be shown one place on the product. Flat circles with any dimensions less than the above: (a) When packed in container shall have one tag inside the container.
(3) Flat products: Flat wire, strip, bar and sheet (see item 8). In	--	(1)	On flat products in rolls or on bucks or reels: (a) 6 inch and over in width. Markings to be in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
rolls, or on bucks or reels			a single row near an end of the product and a tag, label or tape with the required marking to be secured in the center of the rolls or attached to the bucks or reels. Flat products less than 6 inch in width in rolls, or on bucks or reels: (b) When packed in containers or individual units shall have one tag inside the container or attached to the unit. (c) When packed in secured lifts or bundles shall be tagged in two places, one inside and one outside the bundle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
(4) Tubular products: Straight lengths (see item 8) (a) Miscellaneous tubular products: Round, rectangular or polygonal, except items (b), (c), (d), (e), (f) and (g) listed below	--	(2) (3)	On miscellaneous tubular products and tube for salt water service in straight lengths. (a) ½ inch or more in outside diameter. (b) ½ inch or more in width of flat. (c) Over 3 feet in length. Markings to be in recurring intervals not greater than 3 feet throughout the length.
(b) Tube for salt water service	--		Tube with any dimension less than the above: (d) When packed in containers shall have one tag inside the container. (e) When packed in secured lifts or bundles shall be tagged in two places, one inside and one outside the bundle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
(c) Pipe, SPS, regular and extra strong	X	--	On pipe: Producer's name or trademark, type and composition marking in recurring intervals not greater than 3 feet throughout the length shall be the only required markings.
(d) Pipe, threadless, cooper	X	--	On threadless pipe, water and drainage tube: Producers' name or trademark and type, in recurring intervals not greater than 3 feet throughout the length shall be the only required markings.
(e) Copper water tube	X	--	
(f) Copper drainage tube	X	--	
(g) Condenser and heat exchanger tube	--	--	On condenser and heat exchanger tube: Product marking not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
(5) Tubular products: Coiled lengths (see item 8) (a) Miscellaneous round tubular product except items (b), (c), and (d) listed below	--	(2) (3)	On miscellaneous tubular products in coiled lengths: One tag, label or tape with the required markings shall be attached to each coil.
(b) Copper water tube	X	--	On water tube: Producer's name or trademark and type in recurring intervals not greater than 3 feet throughout the length shall be the only required markings.
(c) Refrigeration service tube, copper	--	(2)	On refrigeration and utility tube: When individually packaged the markings shall be printed or stamped on the package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
(d) Utility general purpose tube, copper	--	(2)	When not individually packed one tag, label or tape with required markings shall be attached to each coil.
(6) Shapes or shaped tube (other than round, rectangular or polygonal) (see item 8)	--	--	On shapes or shaped tube: (a) Having a flat or approximately flat surface 1 inch or more in width. (b) Over 3 feet in length. Markings to be shown near an end of the product. Shapes with any dimension less than the above: (a) When packed in containers shall have one tag inside the container.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.


TABLE I.-Marking Information

Subject to the limitations of column (4), markings showing producer's name or trademark, condition designator and specification data, and the information indicated in column (2) by X, and/or column (3) by number shall be printed, stamped or otherwise legibly marked on the product. Where tags are specified all the required markings shall be shown thereon:

(1) Item	(2) Symbol or type	(3) Dimensions: (1) Thickness (2) Diameter (3) Wall thickness	(4) Application of markings
			(b) When packed in secured lifts or bundles shall be tagged in two places, one inside and one outside the bundle.
(7) Wire: In coils or on reels	--	(2)	Wire in coils: Marking to be on a tag or label attached to the coil. Wire on reels: Markings to be on a label, wrapper or tag attached to the unit.
(8) Forgings, forging blanks or slugs, arms components (discs, cups, cases, jackets, etc.) bushings, short tube blanks, tube for microwave use, seamless copper tube for torpedo use, tube for primer bodies, rotating band blanks and similar items	--	--	On forgings, etc: Product marking not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

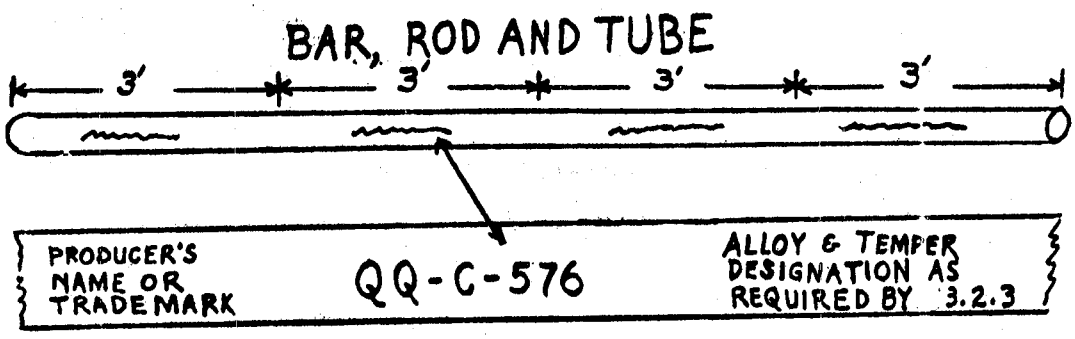

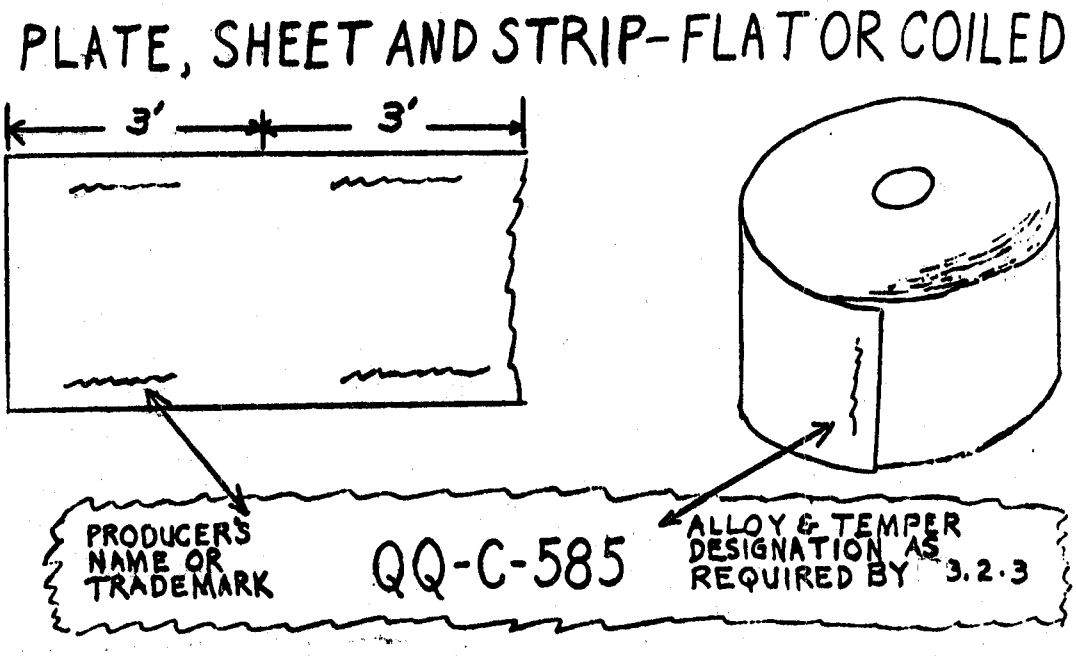

NOTE-THESE EXAMPLES ARE GIVEN PRIMARILY AS A GUIDE AND SHOULD NOT BE CONSIDERED MANDATORY FORNAT

FIGURE 1.—Examples of table I marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.

Fed Std 185a

Custodians:

Army - MR
Navy - AS
Air Force - 16

Reviewer:

Army -
Navy -

Preparing Acivity:

Air Force - 16

Project No. MISC OC 27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:54Z
Check the source to verify that this is the current version before use.