A-A-422B
August 29, 1991
SUPERSEDING
A-A-422A
June 25, 1980

COMMERCIAL ITEM DESCRIPTION

PAN SET, BREAD

The General Services Administration has authorized the use this commercial item description as a replacement for RR-P-58 which has been cancelled.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers aluminized steel bread pan sets for use in bakeries.

1.2 Classification. The pan sets shall be of the following sizes.

Size 1 - 4 pan set
Size 2 - 5 pan set

2. APPLICABLE DOCUMENTS

2.1 The documents referenced in this commercial item description shall be the issues in effect on the date of issuance of the invitation for bids or request for proposal unless otherwise specified. These documents form a part of this commercial item description to the extent specified. In the event of a conflict between this commercial item description and a document referenced herein, this commercial item description shall take precedence.

Federal Standard:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

Copies of Federal standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Copies of military standards may be obtained from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM Standard:

E 29 - Standard Practice For Using Digits In Test Data To Determine Conformance With Specifications.

Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.

Baking Industry Sanitation Standards Committee (BISSC) Standard:

35 - Baking Pans

Application for copies of BISSC standards should be addressed to BISSC, 111 E. Wacker Drive, Suite 600, Chicago, IL 60601.

3. SALIENT CHARACTERISTICS

3.1 Design and construction. The pan sets shall be constructed from aluminized steel. The pans shall be formed from a single piece of aluminized steel 0.0208 inch (minimum) thick. The pan sets shall be constructed as shown in figure 1. The bread pans shall be encircled on the top edge by a 0.140 inch minimum diameter steel wire. The pan sets shall have strapping fabricated of the same material as the pans completely encircling the pan set just below the wire bead. The strapping shall have reinforcing channels. The bread pans shall be permanently joined to the strapping at the pan ends. The dimensions shall be as listed in table I. The spacing between the top of the pan sets shall be at the manufacturer's discretion and shall be consistent within each pan set. The pans may have a nesting flare at the manufacturer's option.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

TABLE I - Dimensions

Size	A Top overall length	B Top outside length	C Inside slope depth	D Bottom outside width	E Bottom outside length	F Top inside length	G Top inside width
1	21-7/8	9-1/2	2-3/4	3-3/4	8-1/4	9	4-1/2
2	26	9-1/2	2-3/4	3-3/4	8-1/4	9	4-1/2

Note: Tolerances shall be as follows:
Dimensions up to 4-1/2 inches: ± 1/4 inch
Dimensions greater than 4-1/2 and less than 9-1/2 inches: ± 3/8 inch
Dimensions 9-1/2 inches or greater: ± 1-1/4 inches

3.2 Finish. The exterior of the pan sets shall be finished with a heat absorbent coating. The interior of the pan sets shall be glazed with the manufacturers standard commercial glaze.

3.3 BISSC Standard compliance. The pan sets shall comply with all provisions of BISSC Standard No. 35, Baking Pans.

3.4 Marking. The pan sets shall be marked with the manufacturer's name, trade name, or trademark of such known character that the source of the pan set may be readily determined.

3.5 Workmanship. The pan sets shall be clean and free of embedded foreign material, slivers, scratches, rough die or gouge marks, pits, rust or scale. The pan sets shall not be fractured, buckled, bent, punctured, malformed, or damaged. Welds shall be sound, smooth, clean and free of porosity and surface burns. Rivets shall be tight and rivet heads shall be concentric and in full contact with the riveted metal surfaces. There shall be no defect which may affect serviceability, durability, or appearance.

3.6 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:08Z
Check the source to verify that this is the current version before use.

3.8 Commercial item. The use of the term "commercial item description" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling. The levels of inspection and acceptable quality levels (AQL's) shall be in accordance with MIL-STD-1Ø5.

4.3 Lot formation. All pan sets from the same manufacturer of the same size offered for delivery at one time shall be considered a lot for purposes of inspection.

4.4 Sampling for visual and dimensional examination. A random sample of pan sets shall be selected from each lot in accordance with inspection level S-4, AQL 4.Ø, expressed in terms of defects per hundred units. The sample unit shall be one pan set. The sample pan sets shall be visually and dimensionally examined to verify compliance with table II and the remainder of this commercial item description. All dimensions are absolute as defined in ASTM E 29.

4.5 Examination for preparation for delivery. A random sample of shipping containers shall be selected from each lot for examination of the unit, intermediate and shipping containers (as applicable) for conformance with the preservation, packaging, packing, labeling, and marking required in the contract or order. Samples shall be selected in accordance with inspection level S-2, AQL 6.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T08:08Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects

Examine	Defect
Finish	Area of corrosion, stain or discoloration Not as specified
Construction and Workmanship	Scratch or tool mark 1/ Any sharp edge, sliver, rough tool or die mark, or burr Any component fractured, split, bent, buckled, punctured or otherwise impaired Any dimension not as specified
Marking	Missing or illegible

1/ - An unacceptable scratch is one that will catch a fingernail when run across it.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Size required.
c. The packaging, packing, and marking required.

6.2 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Size	Number of pans
7330-00-255-5995	1	4
7330-00-255-1534	2	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.

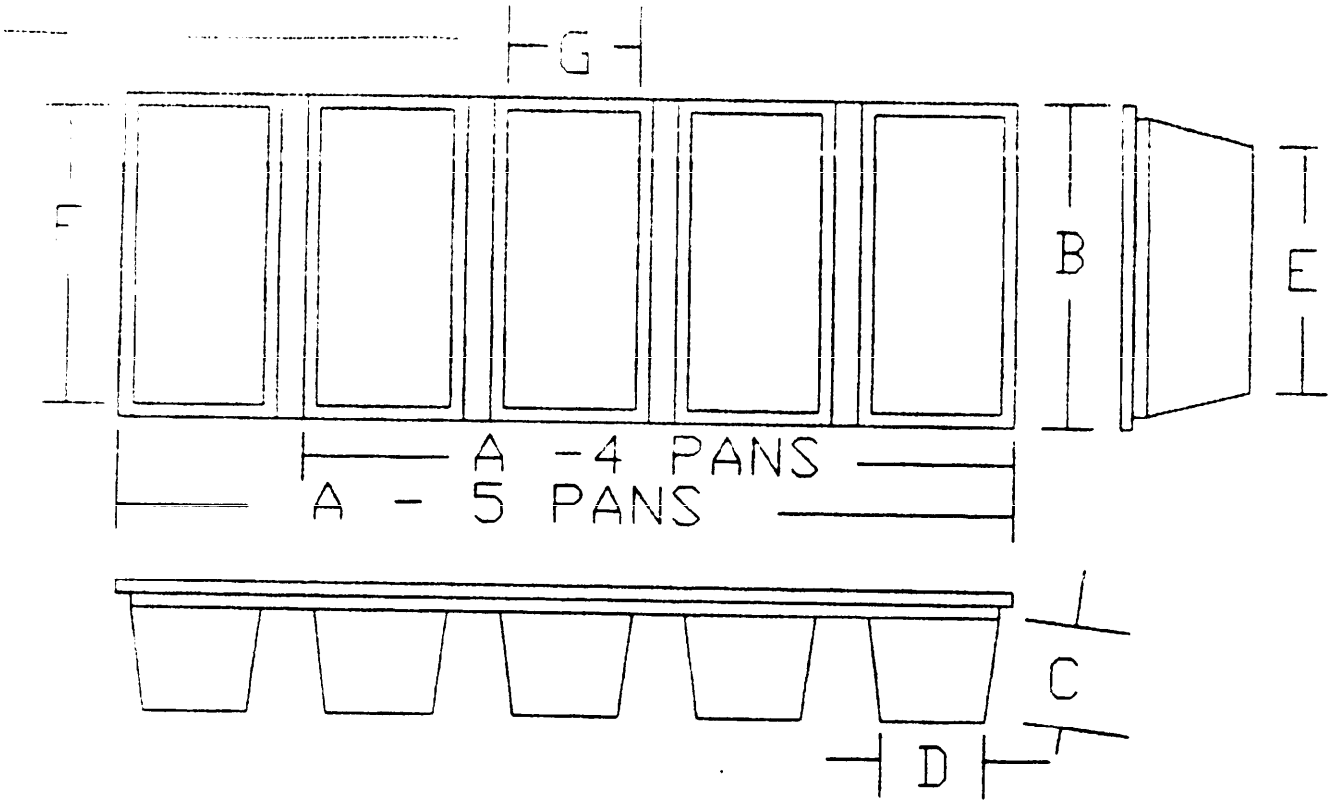


FIGURE 1 - Bread Pan Sets

MILITARY INTERESTS:

Military Coordinating Activity:

Army - GL

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review Activities:

Army - MD, TS
Air Force - 84, 50

User Activity:

Navy - MC

Civil Agency Coordinating Activity:

VA - OSS

Preparing Activity:

GSA - FSS

(DoD Project 7330-0643)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:08Z
Check the source to verify that this is the current version before use.