
MILITARY SPECIFICATION SHEET

WASHER, SPRING TENSION, WAVE, SPRING STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this specification and the latest issue of MIL-W-12133.

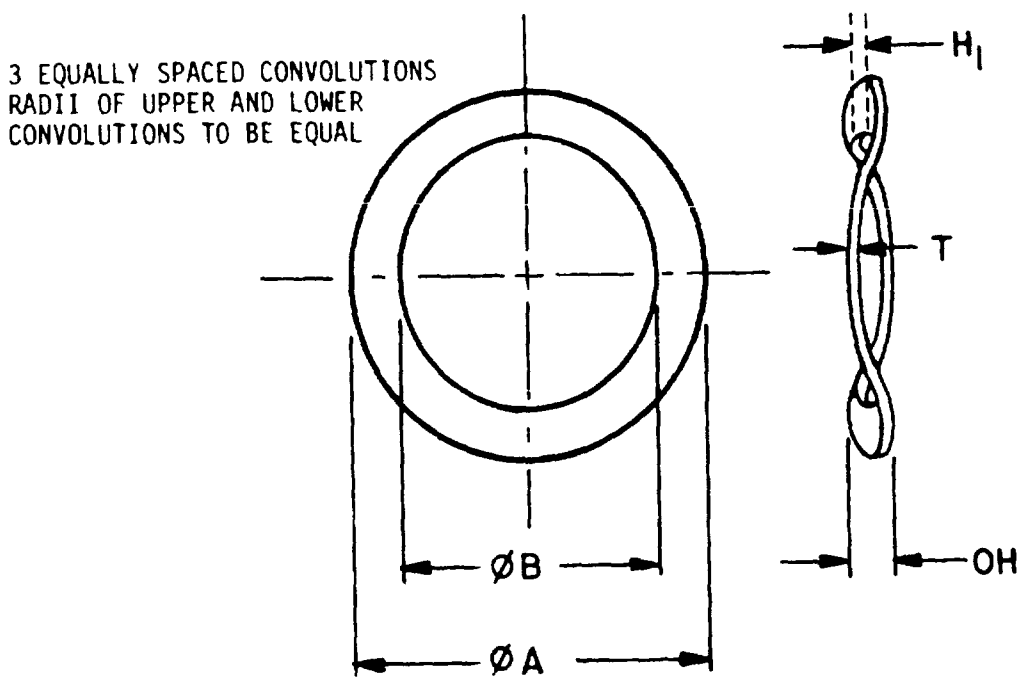

NOTES:
1. All dimensions are in inches.

FIGURE 1. WASHER, SPRING TENSION, WAVE, SPRING STEEL

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Spring steel.

2. Protective coating and surface treatment: Plain, Cadmium plate or Zinc coating. Zinc coating shall be in accordance with ASTM B633, Fe/Zn 13, Type II.

3. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I and a finish code letter, "P" for Plain, "C" for Cadmium plate, "A" for Zinc coating.

Example: M12133/6-02C

- Finish code letter
  - "P" - Plain
  - "C" - Cadmium plate
  - "A" - Zinc coating
- Dash number
- Specification sheet number

M12133/6-02C Indicates - Washer, Spring Tension, Wave, Spring Steel; .367 OD; .265 ID; .006 thick; .030 free height; Cadmium plate.

Source: https://assist.dla.mil -- Downloaded: 202610-17T22:26Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO	Ø A OD ±.010	Ø B ID ±.010	T THK ±.001	OH FREE HGT	OH TOL	H_1 TEST DEFLECTION	LOAD AT H_1 LB
01	.265	.187	.008	.060	±.003	.030	6-14
02	.367	.265	.006	.030		.015	2-4
03	.500	.265	.010	.035		.017	20-25
04	.492	.350	.007	.035		.020	3-5
05	.618	.440	.008	.040		.025	3-5
06	.734	.531	.009	.050		.030	4-7
07	.855	.650	.010	.060		.030	4-7
08	.925	.719	.010	.066		.033	6-9
09	1.102	.856	.012	.075	±.006	.037	9-13
10	1.159	.901	.013	.080		.040	10-14
11	1.235	.961	.014	.087		.043	13-17
12	1.351	1.051	.014	.099		.048	16-20
13	1.593	1.239	.018	.110		.055	21-27
14	1.621	1.261	.019	.112		.056	22-28
15	2.132	1.658	.023	.148		.073	33-43
16	2.645	2.057	.028	.184		.090	50-64
17	3.917	3.047	.042	.258		.128	105-135
18	4.997	3.890	.050	.355		.172	156-198
19	5.817	4.530	.055	.440		.209	191-243

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - ER, MI
Navy - AS
Air Force - 11, 82
DLA - IS

User activities:
Army - CR
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1395)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.