
MILITARY SPECIFICATION SHEET

WASHER, SPRING TENSION, CURVED, COPPER-BERYLLIUM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this specification and the latest issue of MIL-W-12133.

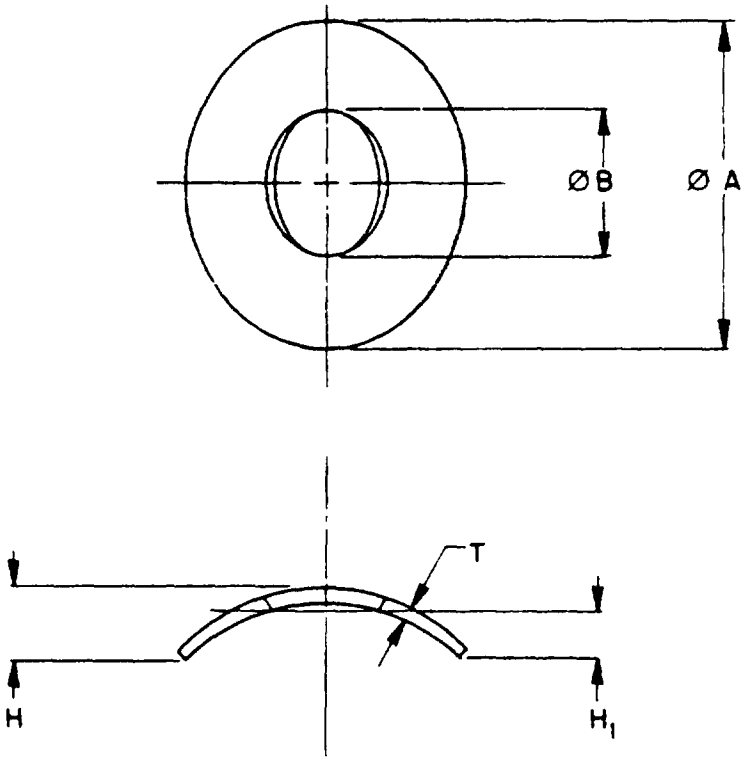

NOTES:
1. All dimensions are in inches.
2. Lettered dimensions are listed in Table I herein.

FIGURE 1. WASHER, SPRING TENSION, CURVED, COPPER-BERYLLIUM

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Copper-Beryllium alloy, numbers 170 or 172 (UNS C17000 or UNS C17200) in accordance with QQ-C-533.

2. Surface hardness. 35-40 HRC.

3. Protective coating and surface treatment. Cadmium plate or Plain.

4. Part number. The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I, and a finish code letter.

EXAMPLE: M12133/9-09P

- Finish codes
  - P - Cadmium plate
  - No code - Plain
- Dash number
- Specification sheet number

M12133/9-09P Indicates - Washer, Spring Tension, Curved, Copper-Beryllium; .133 ID; .250 OD; .006 thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO.	ØA OD ±.010	ØB ID ±.005	T THICKNESS ±.001	H FREE WEIGHT ±.008	H_1 DEFLECTION	LOAD AT H_1 ±15% (LBS)
01	.183	.059	.005	.047	.011	2.0
02	.130	.084	.008	.035	.003	2.7
03	.140	.096	.003	.031	.011	.3
04	.273	.112	.005	.047	.024	1.7
05	.378	.122	.008	.047	.029	5.2
06	.250	.125	.008	.047	.013	3.8
07	.176	.127	.010	.032	.005	3.3
08	.230	.128	.008	.047	.011	3.4
09	.250	.133	.006	.032	.016	1.9
10	.312	.136	.006	.062	.026	2.4
11	.283	.137	.008	.047	.016	3.9
12	.640	.147	.005	.062	.057	1.0
13	.312	.155	.010	.062	.016	6.0
14	.249	.161	.011	.047	.010	4.2
15	.312	.189	.005	.062	.039	1.0
16	.565	.204	.025	.052	.021	48
17	1.065	.252	.015	.093	.078	22
18	.497	.254	.006	.100	.067	2.1
19	.691	.259	.006	.070	.064	1.3
20	.495	.260	.007	.125	.057	2.7
21	.437	.263	.012	.062	.026	7.0
22	.551	.296	.010	.085	.049	5.6
23	.465	.377	.006	.093	.058	1.0
24	.623	.439	.012	.093	.052	5.0
25	.750	.505	.015	.130	.059	8.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review Activities:
Army - AT, ER, MI
Navy - AS
Air Force - 11,82
DLA - IS

User Activities:
Army - CR
Navy - MC, YD

Preparing Activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1509)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:26Z
Check the source to verify that this is the current version before use.