
MIL-I-15665 / 32A
15 March 1988
SUPERSEDING
MIL-I-15665 / 32
30 September 1975

MILITARY SPECIFICATION SHEET

INSIGNIA, COLLAR, THE SERGEANT MAJOR OF THE ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-I-15665.

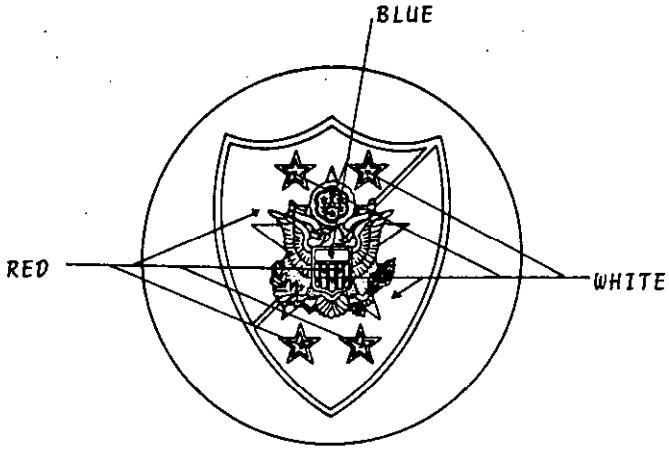

MATERIAL:
SHIELD AND DEVICE: GILDING METAL
DISC: RED BRASS
DIMENSIONS (INCHES):
DISC:
DIAMETER: 1, +1/64, -0
THICKNESS: .040 ± .005
EAGLE AND SHIELD:
HEIGHT (OVERALL): 1-1/4 (REF)
THICKNESS (THICKEST POINT): .080 ± .005
DEVICE:
HEIGHT (OVERALL): 3/8 (REF)
THICKNESS (THICKEST POINT): .060 ± .005

FINISH:
DISC: MIRROR-LIKE POLISHED
SHIELD: ENAMELED, STAR NICKEL PLATED, REMAINDER GOLD PLATED, POLISHED
EAGLE DEVICE: ENAMELED, GOLD PLATED, SATIN FINISH

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:40Z
Check the source to verify that this is the current version before use.

NOTES:

1. DEVICE SHALL BE SECURED TO THE ENAMELED BASE WITH TWO RIVETS.
2. THE RIVETS SHALL BE SOLID AND SHALL BE FABRICATED FROM ANY TYPE BRASS. THE RIVETS SHALL BE LOCATED ON THE VERTICAL CENTERLINE OF THE DEVICE.
3. THE DEVICE SHALL BE LOCATED ON A VERTICAL CENTERLINE OF THE SHIELD WITH THE BASE OF THE DEVICE 1/4 INCH ABOVE THE LOWEST POINT OF THE SHIELD.
4. ENAMELED AREAS SHALL BE AS INDICATED AND SHALL MATCH THE STANDARD OR APPROVED GUIDE SAMPLES AND SHALL CONFORM TO COLOR CHIPS LISTED BELOW:

COLOR	CHIP NO.
RED	1
WHITE	28
BLUE	18

5. THE STAR UNDER THE DEVICE SHALL BE NICKEL PLATED.
6. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE VERTICAL CENTERLINE, EQUIDISTANT FROM EACH END AND 7/8 ± 1/64 INCH ON CENTERS.

Custodian:
Army - IH

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0269)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T06:40Z
Check the source to verify that this is the current version before use.