
MILITARY SPECIFICATION SHEET

TOOLS, FIBER OPTIC, HAND, TYPE VII, CARBIDE/DIAMOND COMPOSITION C

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fiber optic tools described herein shall consist of this specification and the latest issue of MIL-T-83523.

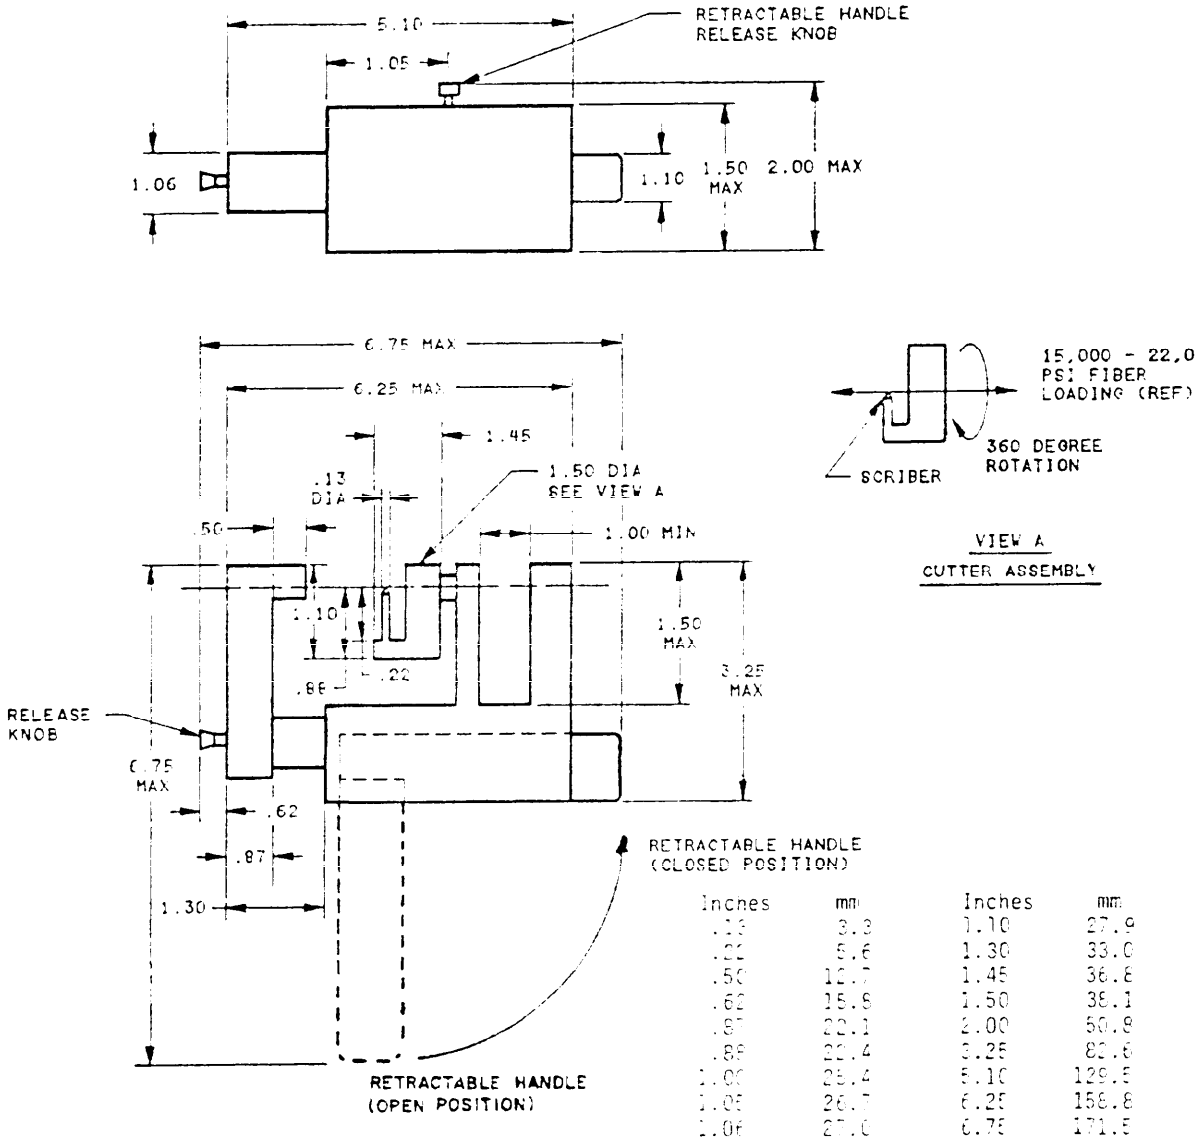

Inches	mm	Inches	mm
.13	3.3	1.10	27.9
.22	5.6	1.30	33.0
.50	12.7	1.45	36.8
.62	15.8	1.50	38.1
.87	22.1	2.00	50.8
.88	22.4	3.25	82.6
1.00	25.4	5.10	129.5
1.05	26.7	6.25	158.8
1.06	27.0	6.75	171.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals.

FIGURE 1. Fiber optic cleaving tool.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-23T08:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Weight: 28 ounces maximum.

Performance: Tool must be capable of cleaving 125, 140 micron & 200, 240 micron fiber. Prior to calibration of cleave tool, ensure the scriber point or edge is on the centerline of the rotating drum axis.

Material: Scriber points shall be diamond per MIL-D-9914 or industrial carbide.

Finish: Black anodize aluminum per MIL-A-8625. Remove all burrs. Break all edges and corners.

Part number: M83523/10.

Application: This tool shall be used to cleave optical fibers as specified in DOD-C-85045 and DOD-F-49291.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT, GL, MI
Navy - EC, OS, SH
Air Force - 11, 13, 14, 17, 19, 70, 71, 80, 81, 84, 90, 99
DLA - ES

User activities:
Army - AV, ME
Navy - MC, YD
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0040)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:37Z
Check the source to verify that this is the current version before use.