WW-P-471C
AMENDMENT 1
6 March 1987

FEDERAL SPECIFICATION

PIPE-FITTINGS: BUSHINGS, LOCKNUTS, AND PLUGS; IRON, STEEL, AND ALUMINUM: (THREADED); 125-150 POUNDS

This amendment forms a part of Federal Specification WW-P-471C, dated December 29, 1981, is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

Page 2

Paragraph 1.2.1 - Under Material B


DELETE: Finish C - Zinc plated

ADD: Finish C - Electrodeposited Zinc
Finish D - Electrodeposited Cadmium

Paragraph 1.2.2

DELETE: In its entirety.

ADD: 1.2.2 Definitive part number (DPN). Plugs, bushings, and locknuts covered by this specification shall be identified by a DPN. This part number is intended for cataloging and ordering purpose only. The DPN shall consist of the Federal Specification symbol plus the specification part number (see 1.2.1). The DPN shall be written as follows (see 6.2):

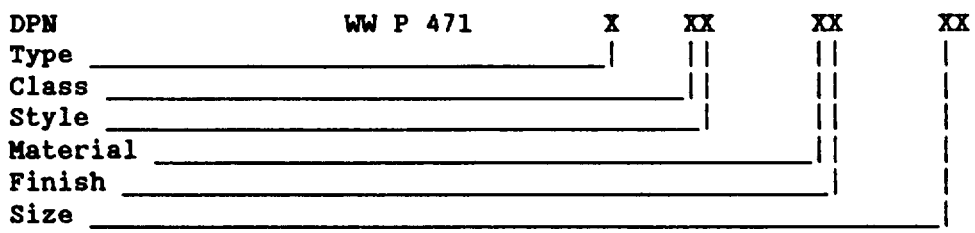

NOTE: Use Q where class and style is not applicable.

AMSC N/A

FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.

Page 3

Paragraph 2.3

DELETE: ASTM A153 - Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A216 - Specification for Steel Castings, Carbon, Suitable for Fusion Welding, for High-Temperature Service

ADD: ASTM B633 - Specification for Electrodeposited Coatings of Zinc on Iron and Steel
ASTM B766 - Specification for Electrodeposited Coatings of Cadmium

Page 4

Paragraph 3.1.1

DELETE: In its entirety.

ADD: 3.1.1 Iron and steel. Iron and steel shall conform to ANSI B16.14.

Paragraph 3.5.1

DELETE: In its entirety.

ADD: 3.5.1 Ferrous pipe fittings. When specified (see 6.2), iron or steel fittings shall be either zinc coated in accordance with ASTM B633 or cadmium coated in accordance with ASTM B766. Coating shall be applied prior to all threading.

Paragraph 3.5.2

DELETE: In its entirety.

ADD: 3.5.2 Aluminum pipe fittings. When specified (see 6.2), aluminum fittings shall be anodized in accordance with ASTM B580.

Page 6

Paragraph 4.4.2

DELETE: (ANSI B16.14 material)
(ASTM A216 material)

Preparing Activity:
Navy - YD

(Project 4730-0947)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:23Z
Check the source to verify that this is the current version before use.