MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF, STRAIGHT, CATEGORY 4A (FOR MIL-C-5015 SOLDER CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

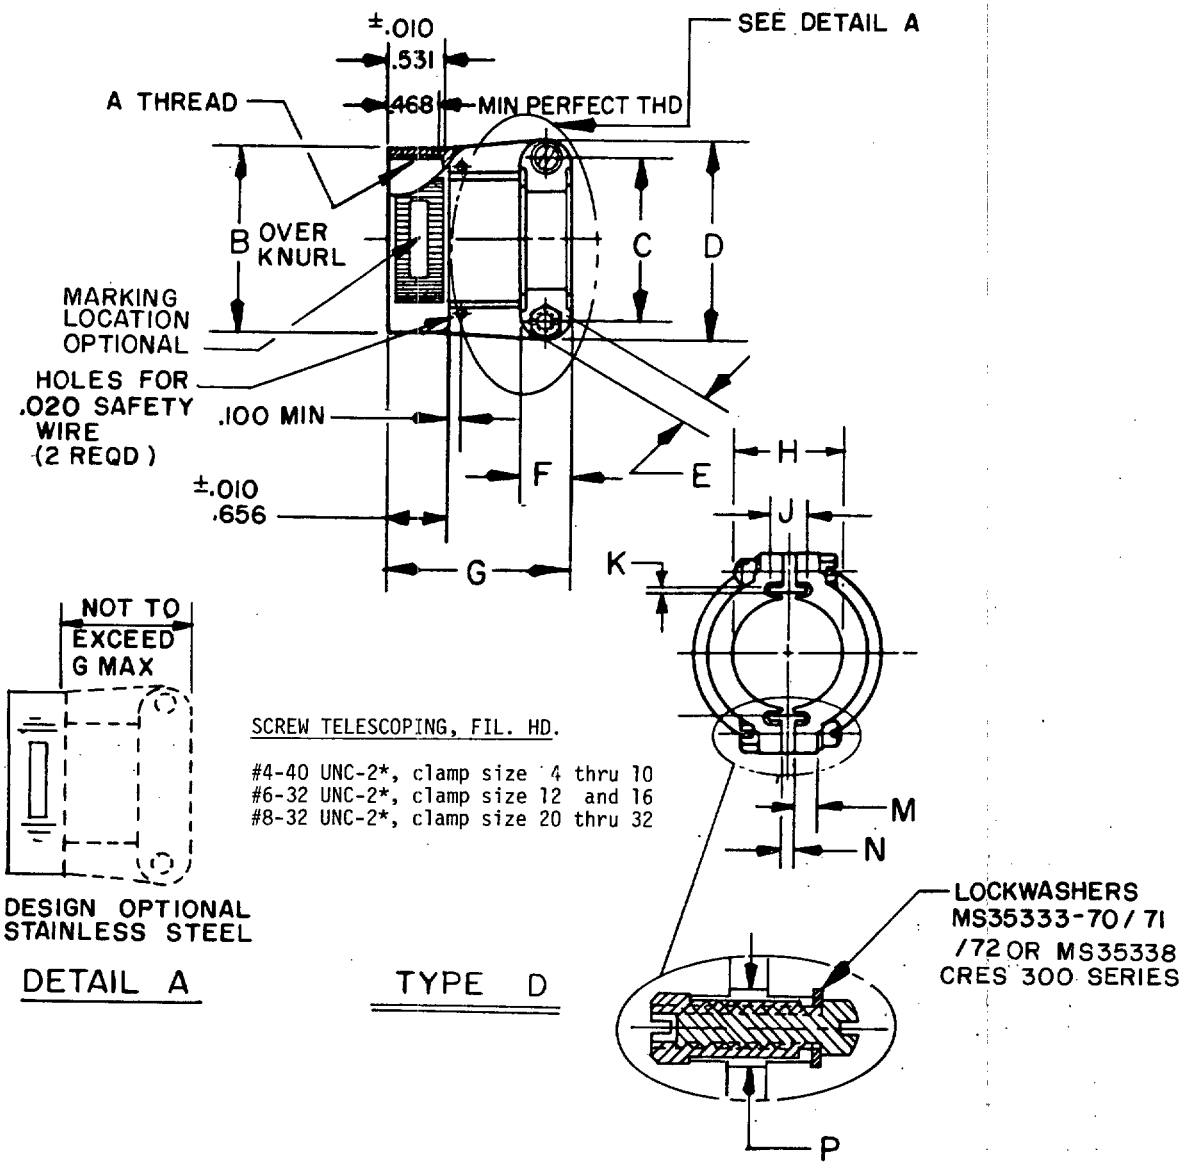


FIGURE 1. Configurations and dimensions.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Dash No.	A Thread Class 2A	B Dia Max	C ±.010	D ±.020	E +.000 -.007	F ±.010	G ±.020	H Clamp Range Min	H Clamp Range Max	J Dia ±.010	K ±.010	M ±.010	N ±.010	P ±.005	Test plug diameter (inches) Min	Test plug diameter (inches) Max	Pull-out load (pounds)	Clamp size range
-4D	.625-24 UNEF	.937	.637	.937	.250	.312	1.281	.125	.312	.218	.062	.156	.109	.166	.109	.125	25	1
-6D	.750-20 UNEF	1.031	.763	1.125	.250	.375	1.281	.250	.437	.281	.062	.175	.125	.166	.234	.250		
-8D	.875-20 UNEF	1.250	.942 ±.032	1.312	.250	.422 ±.026	1.281	.312	.562	.312	.062	.211 ±.018	.125	.166	.296	.312	50	
-10D	1.000-20 UNEF	1.250	.964	1.312	.250	.437	1.281	.350	.625	.312	.062	.218	.125	.166	.334	.350		
-12D	1.188-18 UNEF	1.437	1.130	1.531	.250	.437	1.312	.500	.750	.375	.062	.250	.156	.192	.484	.500		2
-16D	1.438-18 UNEF	1.688	1.375	1.750	.250	.531	1.406	.625	.937	.375	.062	.250	.188	.192	.609	.625	75	
-20D	1.750-18 UNS	2.000	1.703	2.093	.312	.531	1.593	.875	1.250	.475	.078	.312	.188	.217	.859	.875		
-24D	2.000-18 UNS	2.250	1.906	2.343	.312	.531	1.625	1.000	1.375	.500	.093	.312	.250	.217	.984	1.000		3
-28D	2.250-16 UN	2.500	2.218	2.750	.312	.812	1.900	1.250	1.625	.625	.093	.312	.375	.217	1.234	1.250	100	
-32D	2.500-16 UN	2.750	2.500	3.000	.312	.812	1.900	1.437	1.875	.675	.125	.312	.375	.217	1.421	1.437		

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.234	5.94	.675	17.15	1.421	36.09
.007	.18	.250	6.35	.750	19.05	1.437	36.50
.010	.25	.281	7.14	.763	19.38	1.531	38.89
.018	.46	.296	7.52	.812	20.62	1.593	40.46
.020	.51	.312	7.92	.859	21.82	1.625	41.28
.026	.66	.334	8.48	.875	22.22	1.688	42.88
.032	.81	.350	8.89	.937	23.80	1.703	43.26
.062	1.57	.375	9.52	.942	23.93	1.750	44.45
.078	1.98	.422	10.72	.964	24.49	1.875	47.62
.093	2.36	.437	11.10	.984	24.99	1.900	48.26
.109	2.77	.468	11.89	1.000	25.40	1.906	48.41
.125	3.18	.475	12.07	1.031	26.19	2.000	50.80
.156	3.96	.484	12.29	1.125	28.58	2.093	53.16
.166	4.22	.500	12.70	1.130	28.70	2.218	56.34
.175	4.44	.531	13.49	1.234	31.34	2.250	57.15
.188	4.78	.562	14.27	1.250	31.75	2.340	59.44
.192	4.88	.609	15.47	1.281	32.54	2.500	63.50
.211	5.36	.625	15.88	1.312	33.32	2.750	69.85
.217	5.51	.637	16.18	1.375	34.92	3.000	76.20
.218	5.54	.656	16.66	1.406	35.71		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances shall be: .xx = ±.01; .xxx = ±.005; angular: x° = ±1°00'; x°xx' = ±0°30'.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction:
Dimensions and configuration: See figure 1.


Material and finish: Accessory components shall be as shown in table I.
Clamp assembly screws - 316 series corrosion resistant steel.

TABLE I. Material and finish.

Component	Material	Finish
Body	Aluminum alloy in accordance with MIL-C-85049	W 1/ N
Body	Corrosion resistant steel 316 series per QQ-S-763	S

1/ Not for Navy use.


Part number: see example below:

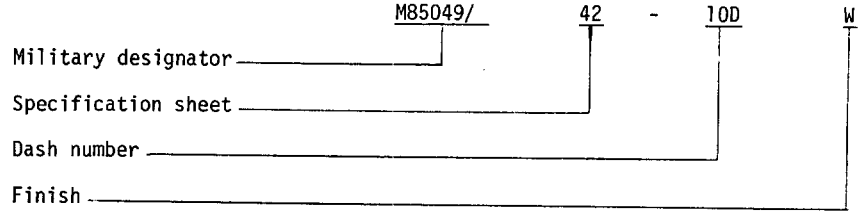

Qualification: See MIL-C-85049, category 4A.

QPL evaluating activity: Naval Weapons Support Center, Code 3064, Crane, IN 47522.

Supersession data:

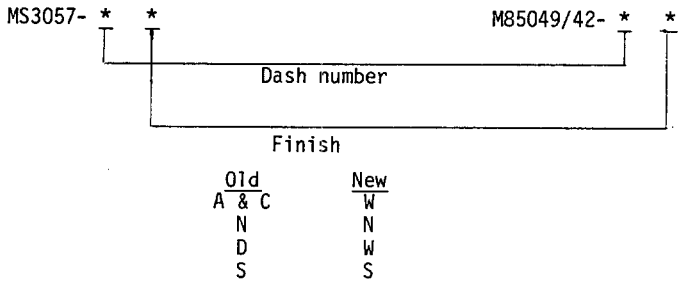

Old	New
A & C	W
N	N
D	W
S	S

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC, SH
Air Force - 11
DLA - ES

Preparing activity:
Navy - AS

Agent:
DLA - ES

(Project 5935-3067-28)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-85049/42

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.