
FED SUP CLASS

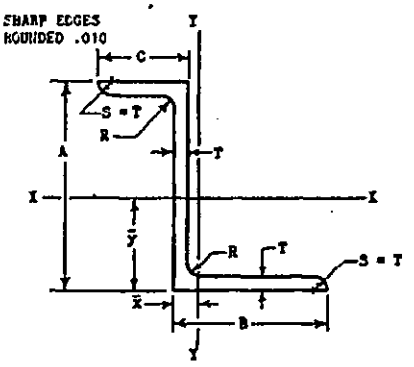

NOTES ON SYMBOLS

"ȳ" (and "x̄") = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10139-1101", "10139" INDICATES "ZEE-UNEQUAL LEG", 11 INDICATES 1-1/8" FOR DIMENSION "A" (1.125 IN COL. "A"). 01 IN 1101 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

(3) REINSTATE - 3 Mar 82

AND 10139 DASH NO'S	NOMINAL DIMENSIONS					AREA	SECTION ELEMENTS					
	A	B	C	T	R		ȳ	x̄	Ixx	Iyy	ρxx	ρyy
	Inches					Square Inches	Inches		Inches^4		Inches	
-0401	.500	.625	.375	.050	.094	.0727	.211	.105	.0027	.0037	.191	.227
-0402				.063	.125	.0916	.212	.110	.0033	.0043	.189	.218
-0403		.750		.050	.094	.0790	.197	.150	.0030	.0055	.194	.264
-0404				.063	.125	.0995	.198	.154	.0035	.0067	.188	.259
-0501	.625	.625	.375	.050	.094	.0790	.267	.0985	.0047	.0037	.244	.215
-0502				.063	.125	.0994	.268	.104	.0057	.0044	.239	.210
-0503		.750		.050	.094	.0852	.249	.111	.0052	.0055	.244	.256
-0504				.063	.125	.107	.251	.115	.0061	.0068	.238	.251
-0505		1.000	.750	.063		.147	.282	.121	.0095	.0215	.254	.409
-0601	.750	.625	.375	.050	.094	.0852	.324	.0931	.0073	.0037	.293	.208
-0602				.063	.125	.107	.325	.0984	.0089	.0044	.287	.203
-0603		.750		.050	.094	.0916	.303	.133	.0078	.0057	.292	.250
-0604				.063	.125	.115	.305	.138	.0095	.0069	.287	.244
-0605		1.000	.750	.063		.155	.340	.116	.0145	.0216	.306	.399
-0701	.875	.625	.375	.063	.125	.115	.382	.0937	.0128	.0045	.334	.197
-0702		.750		.063		.123	.360	.131	.0137	.0070	.334	.238
-0703				.078		.148	.359	.139	.0153	.0081	.327	.234
-0704		.875	.500	.050	.094	.110	.357	.126	.0135	.0102	.350	.305
-0705				.063	.125	.139	.368	.111	.0164	.0124	.344	.259
-0706				.078		.167	.368	.119	.0191	.0116	.337	.256
-0707		1.000	.750	.063		.163	.398	.112	.0207	.0247	.357	.390
-0708				.078		.197	.398	.120	.0242	.0294	.351	.387
-1001	1.000	.625	.375	.050	.094	.0977	.439	.084	.0144	.0037	.384	.196
-1002		.750		.050		.104	.414	.120	.0154	.0058	.385	.235
-1003				.078	.125	.158	.415	.133	.0220	.0082	.374	.229
-1004		.875	.500	.078		.177	.424	.114	.0271	.0118	.395	.291
-1005				.094		.209	.423	.152	.0299	.0169	.378	.285
-1006		1.000		.063		.155	.406	.175	.0232	.0171	.388	.332
-1007				.078		.187	.404	.184	.0277	.0203	.395	.330
-1101	1.125	.625	.375	.063	.125	.131	.499	.0362	.0235	.0045	.424	.185
-1102				.050	.094	.123	.480	.125	.0212	.0103	.414	.290
-1103		.875	.500	.063	.125	.155	.481	.130	.0297	.0126	.438	.285
-1104				.078		.187	.480	.138	.0348	.0148	.432	.282
-1105				.094		.220	.480	.146	.0398	.0170	.425	.278
-1106		1.125	.625	.063		.178	.469	.178	.0358	.0268	.448	.389
-1107				.078		.216	.468	.187	.0422	.0320	.442	.395
-1108				.094		.256	.468	.196	.0484	.0373	.435	.392

APPROVED 2 Apr 43 REVISED (1) 21 Mar 45 (2) 1 Sep 61 (3) 3 Mar 82

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.


P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE ZEE - UNEQUAL LEG EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND10139
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF

DD FORM 1 MAY 72 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
9540

SHARP EDGES
ROUNDED .010

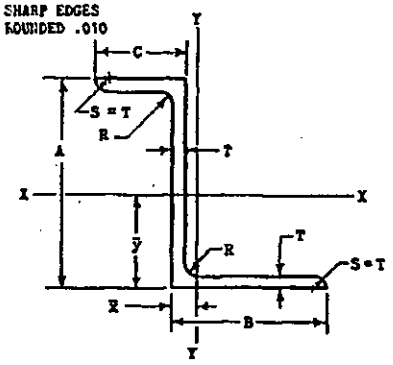

NOTES ON SYMBOLS

"ȳ" (and "z̄") = LOCATING DIMENSIONS FOR AXIS XX-YY.

Ixx (and Iyy) = MOMENT OF INERTIA ABOUT XX AND YY.

ρxx (and ρyy) = RADIUS OF GYRATION ABOUT XX AND YY.

DASH NUMBER: IS DIE NUMBER AND INDICATES EACH SHAPE AND SIZE OF SECTION. EXAMPLE: IN "AND10139-2401", "10139" INDICATES "ZEE-UNEQUAL LEG", 24 INDICATES 2-4/8" FOR DIMENSION "A" (2.500 IN COL. "A"). 01 IN 2401 IS SERIAL NUMBER ONLY.

MATERIAL SHALL BE IN ACCORDANCE WITH APPLICABLE GOVERNMENT SPECIFICATIONS.

AND 10139 DASH NO'S	NOMINAL DIMENSIONS					AREA	SECTION ELEMENTS					
	A	B	C	T	R		ȳ	z̄	Ixx	Iyy	ρxx	ρyy
	Inches					Square Inches	Inch		Inches^4		Inch	
-1201	1.250	.750	.500	.063	.125	.155	.565	.0906	.0360	.0089	.483	.240
-1202				.078		.187	.564	.0983	.0407	.0097	.466	.228
-1203		1.000	.625	.063		.178	.546	.133	.0438	.0206	.496	.340
-1204				.094		.256	.545	.250	.0594	.0284	.482	.333
-1205		1.250	.750	.078		.245	.532	.189	.0610	.0476	.499	.436
-1206				.094		.291	.532	.198	.0703	.0554	.492	.437
-1301	1.375	1.000	.625	.063	.125	.186	.604	.129	.0547	.0207	.542	.334
-1302				.078		.226	.604	.137	.0648	.0246	.536	.330
-1303		1.250	.750	.125		.391	.588	.208	.1095	.0693	.527	.421
-1401	1.500	.750	.500	.063	.125	.170	.684	.0851	.0556	.0089	.572	.229
-1402				.078		.206	.683	.0928	.0657	.0105	.564	.226
-1403		1.000	.625	.094		.279	.661	.141	.0920	.0286	.574	.320
-1404				.125		.359	.660	.257	.1133	.0351	.561	.313
-1405		1.250	.750	.094		.314	.645	.187	.1082	.0559	.587	.422
-1601	1.750	.750	.500	.078	.125	.226	.803	.0881	.0956	.0106	.650	.216
-1602				.094		.267	.802	.0953	.1104	.0122	.643	.213
-1603		1.000	.625	.078		.255	.779	.126	.1149	.0249	.671	.312
-1604		1.250	.750	.094		.338	.760	.177	.1558	.0564	.679	.409
-2001	2.000	.750	.500	.063	.125	.202	.924	.0768	.1112	.0090	.742	.211
-2002		1.000	.625	.094		.326	.897	.128	.1839	.0290	.751	.298
-2003		1.250	.750	.078		.304	.877	.160	.1833	.0487	.777	.400
-2004				.094		.361	.876	.168	.2138	.0577	.769	.396
-2005		1.500	.875	.125		.516	.858	.229	.3061	.1235	.771	.489
-2201	2.250	1.000	.750	.078	.125	.304	1.060	.0916	.2233	.0306	.857	.318
-2202				.094		.361	1.060	.0996	.2607	.0342	.850	.308
-2203		1.250		.078		.323	.994	.153	.2422	.0490	.865	.389
-2204				.125		.500	.992	.176	.3563	.0713	.844	.378
-2401	2.500	.875	.750	.094	.125	.373	1.212	.0705	.3207	.0266	.927	.267
-2402		1.125		.094		.397	1.113	.124	.3508	.0450	.941	.337
-2403				.125		.516	1.112	.140	.4226	.0559	.927	.329
-2404		1.375	.875	.094		.432	1.119	.162	.3989	.0816	.961	.435
-2405				.125		.563	1.118	.178	.5063	.1020	.949	.426
-3001	3.000	1.000	.750	.125	.125	.563	1.420	.106	.6643	.0431	1.087	.277
-3002		1.375	.875	.125		.625	1.356	.166	.7842	.1028	1.120	.406
-3003		1.750	1.000	.156		.845	1.303	.253	1.0797	.2108	1.131	.524

REVISED ① 21 Mar 45 ② 1 Sep 51 ③ 3 Mar 82
APPROVED 2 Apr 43

This standard is approved for use by the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

P. A. Air Force - 11 Other Cust NO INTEREST	INTERNATIONAL INTEREST	TITLE ZEE - UNEQUAL LEG EXTRUDED	ARMY-NAVY AERONAUTICAL DESIGN STANDARD AND 10139
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.