
FED. SUP CLASS
2320

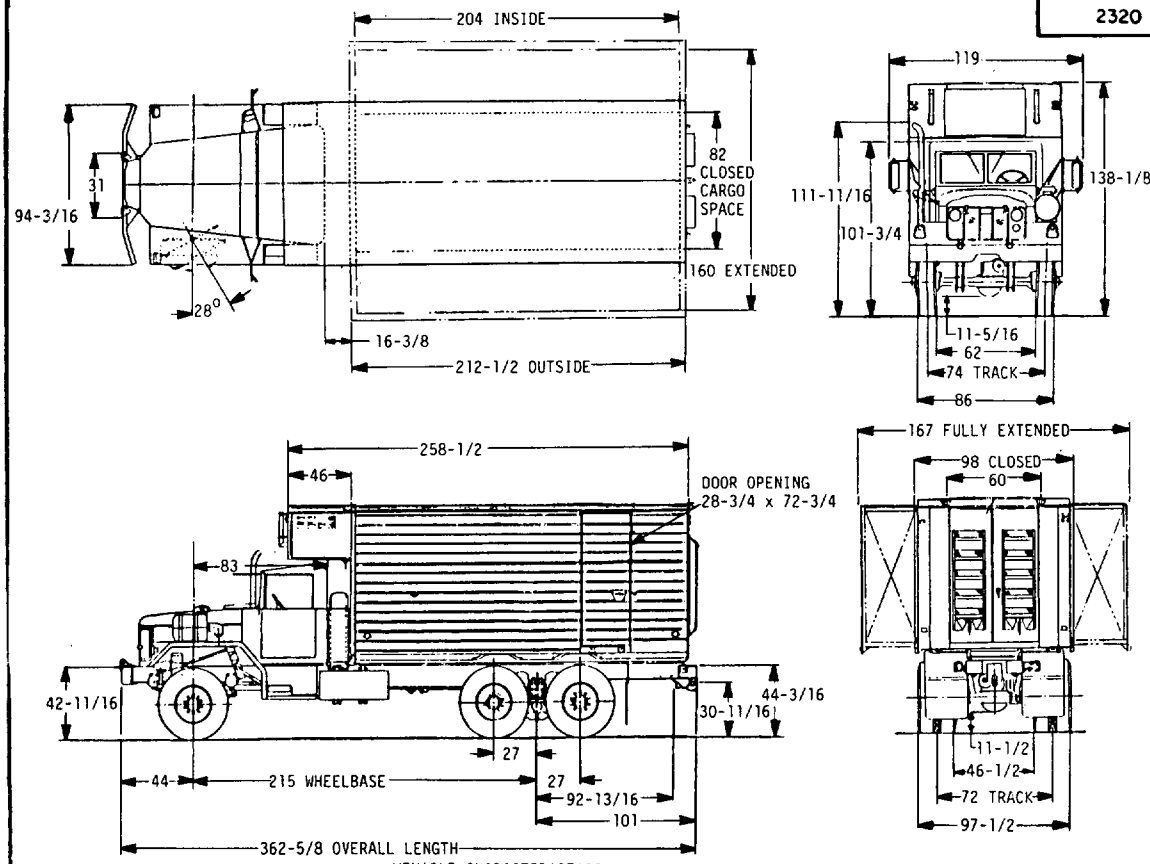

VEHICLE CHARACTERISTICS

CHASSIS MODEL:	M811A2
BRIDGE CLASSIFICATION: (SHORT TONS)	WO/W
EMPTY	11
WITH PAYLOAD	14
CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW:	
FRONT	10,750 LBS
REAR BOGIE	17,145 LBS
TOTAL	27,895 LBS
PAYLOAD:	5,000 LBS
GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW:	
FRONT	10,925 LBS
REAR BOGIE	21,970 LBS
TOTAL	32,895 LBS
(ADD 400 LBS FOR 2-MAN CREW W/EQUIPMENT)	
TOWED LOAD ALLOWANCE:	15,000 LBS
MAXIMUM VERTICAL LOAD ON PINTLE:	1,500 LBS
SHIPPING DIMENSIONS:	
CUBIC FEET	2,840
SQUARE FEET	247
ON-VEHICLE EQUIPMENT: (OVE)	
BASIC ISSUE ITEMS	12300877
ADDITIONAL AUTHORIZED LIST	12300998

CENTER OF GRAVITY: (AT CURB WEIGHT)	WO/W
ABOVE GROUND	54-5/16
REAR OF CENTERLINE OF FRONT AXLE	132-11/16
CENTER OF GRAVITY: (W/PAYLOAD)	
ABOVE GROUND	N/A
REAR OF CENTERLINE OF FRONT AXLE	143-7/8
PERFORMANCE:	
AT GROSS WEIGHT W/O TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	60+%
CRUISING RANGE	350 MILES
AT GROSS WEIGHT W/TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	53%
CRUISING RANGE	300 MILES

BODY:
EXPANSIBLE VAN BODY, MODEL M32C, 8736696. THIS BODY IS THE SAME AS THE M32 BODY EXCEPT THAT WINDOWS IN VAN BODY AND IN DOORS ARE ELIMINATED. THE VEHICLE IS FURTHER MODIFIED FOR SPECIAL APPLICATION AS A TACTICAL IMAGE INTERPRETATION FACILITY BY THE ELECTRONICS COMMAND. VAN IS HEATED BY ONE 60,000 BTU HOT AIR HEATER LOCATED ON LEFT SIDE OF AIR CONDITIONER IN VAN BONNET. 10921727 AIR CONDITIONER IS A LIGHT WEIGHT 36,000 BTU/HR, 220V AC, 3 PHASE POWER UNIT. (NSN 4120-01-137-5085)

ACCESSORY SUPPLEMENTAL KITS: 12300925

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DWG NO.	
MS52193-1	8736872	LESS WINCH

APPROVED 14 JUN 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK: VAN EXPANSIBLE, 5 TON, 6x6, M820A1	MILITARY STANDARD MS52193(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET | OF |

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.