INCH-POUND

A-A-2566A
May 16, 2002
SUPERSEDING
A-A-2566
March 25, 1988

COMMERCIAL ITEM DESCRIPTION

BAR, WRECKING

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This commercial description covers wrecking bars.

2. CLASSIFICATION. The wrecking bars shall conform to the following types.

2.1 Type I, Gooseneck and Pinch-Point.

2.2 Type II, Offset Claw and Pinch-Point.

3. SALIENT CHARACTERISTICS.

3.1 Design.

3.1.1 Type I. The bar shall have one end bent in the form of a gooseneck and the opposite end in the form of a pinch point. The gooseneck provided shall have a slotted claw suitable for pulling nails. The pinch point end shall be wedge shaped and offset at an angle of 30 degrees +/- 5 degrees from the longitudinal axis of the bar. The type I bar shall conform to the table and be similar to figure 1.

3.1.2 Type II. The bar shall have the ends offset at an angle of 30 degrees +/-5 degrees from the longitudinal axis in opposite directions from each other. Both ends shall be wedge shaped with a slotted claw on one end suitable for pulling nails. The type II bars shall conform to the table and be similar to figure 2.

3.1.3 Type I and II bars. Otherwise meeting the requirements of this specification may be the manufacturer's standard design passing a physical test. A test load value as shown in table 1 for the appropriate size of bar being tested shall be applied to the body at a point 4 inches from one end, with the opposite end secured. The load being applied shall be perpendicular to the body in a direction as to straighten the offset or gooseneck. The wrecking bar, after being tested shall indicate no fracture or permanent set in excess of 1/32-inch from the original shape.

3.1.4 Material. The material used in manufacturing the bars shall either be tool steel or an alloy steel. The work ends of the bars shall have hardness between 38 and 48 on the Rockwell C scale in accordance with ASTM E-18.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Hardware SuperStore, 6FEE, 1500 Bannister Rd., Bldg.# 6, Kansas City, Missouri 64131.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

3.1.5 Finish. The bars shall be free from burrs, roughness, and excessive oxide scale. The body of the bars shall either be painted, or have an oil coated natural finish. The work ends of the bars shall have a satin finish with either an oil or phosphate coating.

Figure 1. Type I


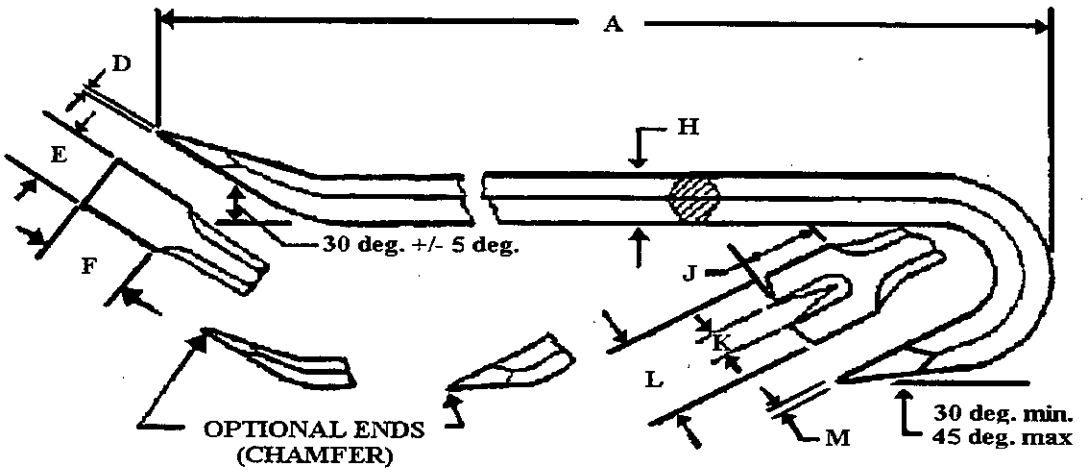


Figure 2. Type II

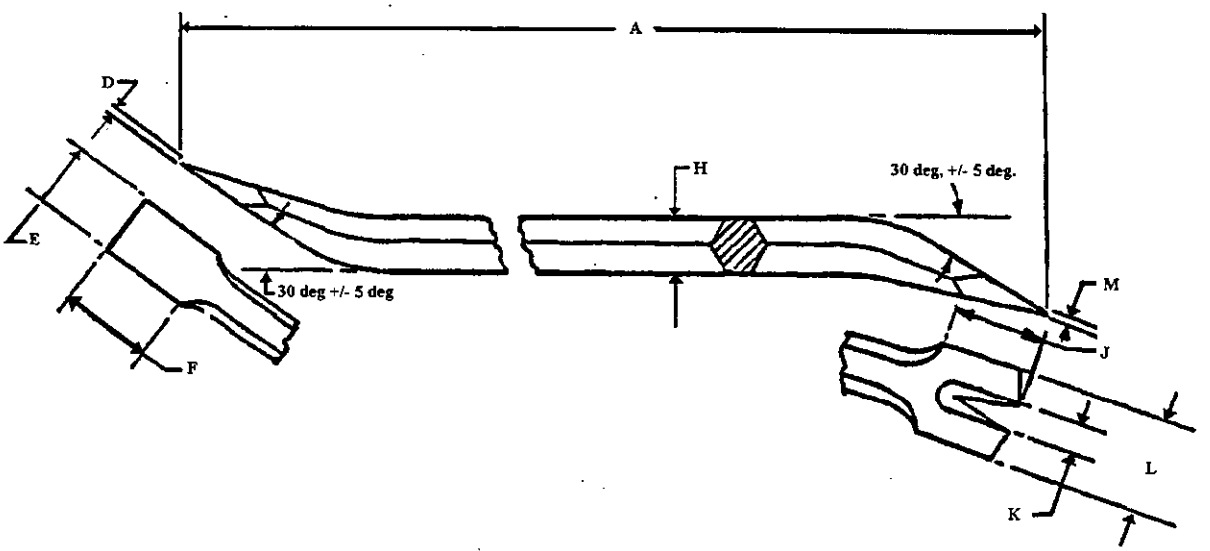

	A	B	C	D	E	F	G	H	I	J	K	L
1	Size number	A	D	E	F	H	J	K	L	M	Test load.	Load distance from end.
2	Type I	(+/-)1.0 (inches)	(+/-)1/32 (inch)	(+)1/8,(-)1/16 (inch)	(+/-)1/8 (inch)	Min. (inch)	Min (inch)	(+/-)1/16 (inch)	Min (inch)	(+/-)1/32 (inch)	(pounds)	(inches)
3	1	12	1/16	3/4	1	1/2	3/4	1/4	1 1/16	1/16	150	8
4	2	18	1/16	15/16	1 1/8	5/8	1	5/16	1 1/8	1/16	150	14
5	3	24	1/16	1	1 3/8	3/4	1 5/16	7/16	1 3/16	1/16	125	20
6	4	30	1/16	1	1 3/8	3/4	1 5/16	7/16	1 3/16	1/16	100	26
7	5	36	1/16	1	1 3/8	3/4	1 5/16	7/16	1 3/16	1/16	75	32
8	Type II											
9	4	30	1/16	1	1 3/8	3/4	1 5/16	7/16	1 3/16	1/16	100	26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The supplier/manufacturer is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch- pound units, a request should be made to the contracting officer to determine if the product is acceptable.

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The products provided shall meet the salient characteristics of this Commercial Item Description and conform to the supplier's own drawings, specifications, standards and quality assurance practices, and shall be the same product and offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements and may use any commercial facilities (including the supplier's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any inspections deemed necessary to assure the item conforms to the specified requirements.

6. PACKAGING.
Requirements of preservation, packing, packaging, and marking of packages shall be as specified in the contract or order.

7. NOTES.

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1 Addresses for obtaining copies of referenced documents:

Federal Acquisition Regulation (FAR): Government Printing Office, Superintendent of Documents, Washington, DC 20401-9371

GSA Specification Section (3FP-E), Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA, 19428-2959

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

7.2 National Stock Numbers (NSNs). The following list of NSNs corresponds to the types and sizes specified in this CID. This list may not be indicative of all possible NSNs associated with this CID.

NSNs.	Type	Size
5120-00-223-7218	I	1
5120-00-293-2384	I	2
5120-00-224-1393	I	3
5120-00-293-0665	I	4
5120-00-242-0762	I	5
5120-00-180-0873	II	4

7.3 Ordering data. The contract order should specify the following:

(A) Title, number, and date of Commercial Item Description.
(B) Type and size of wrecking bar.
(C) When applicable the appropriate NSN.

7.4 Key words. Wrecking bar.

MILITARY INTERESTS:

NONE: DoD has no registered interest in revisions and amendments to this Commercial Description until further notice.

Preparing Activity:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.