This document has been approved for public release and sale; its distribution is unlimited.


MIL-C-24404/2(SHIPS)
1 September 1971
SUPERSEDING
NAVSHIPS DWG. 9000-S8106-73143

MILITARY SPECIFICATION SHEET

CONNECTION BOX, 15 FEET SUBMERSIBLE, FOR DEGAUSSING CABLES


(SYMBOL NUMBERS 478.2, 478.3, 478.4)


The complete requirements for procuring the connection boxes described herein shall consist of this document and the latest issue of Specification MIL-C-24404(SHIPS).

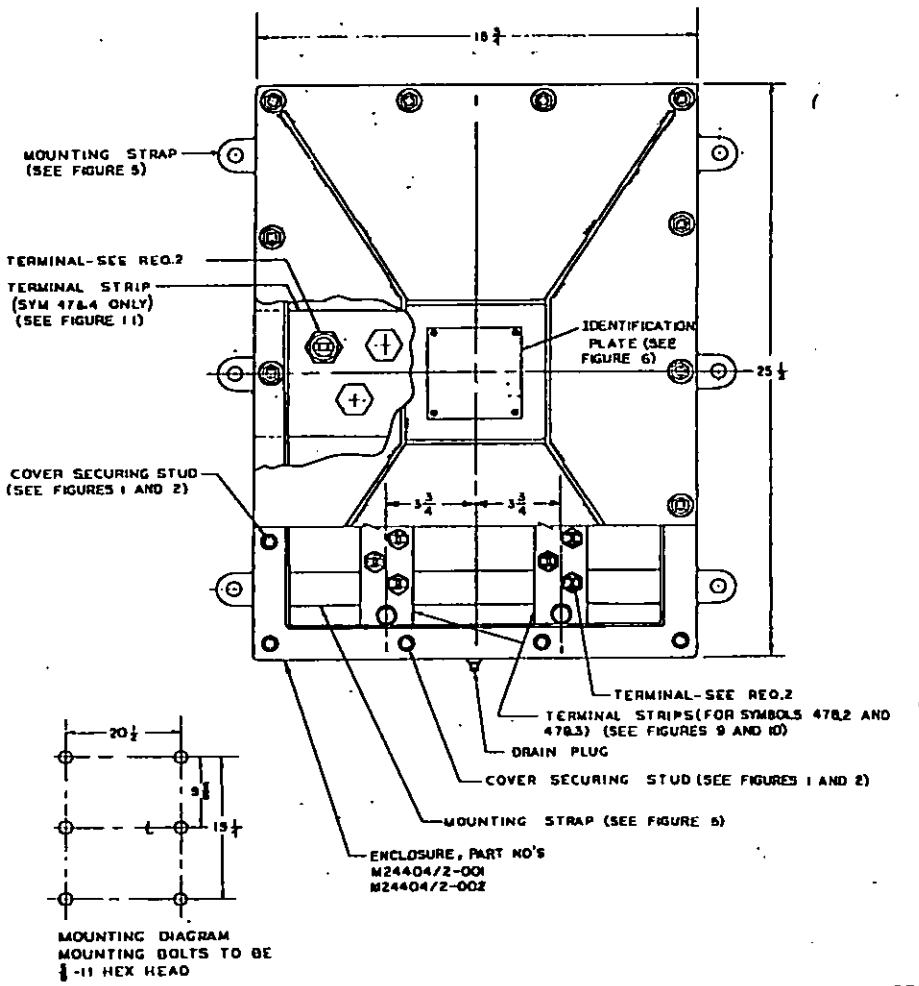

PSC 1075

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

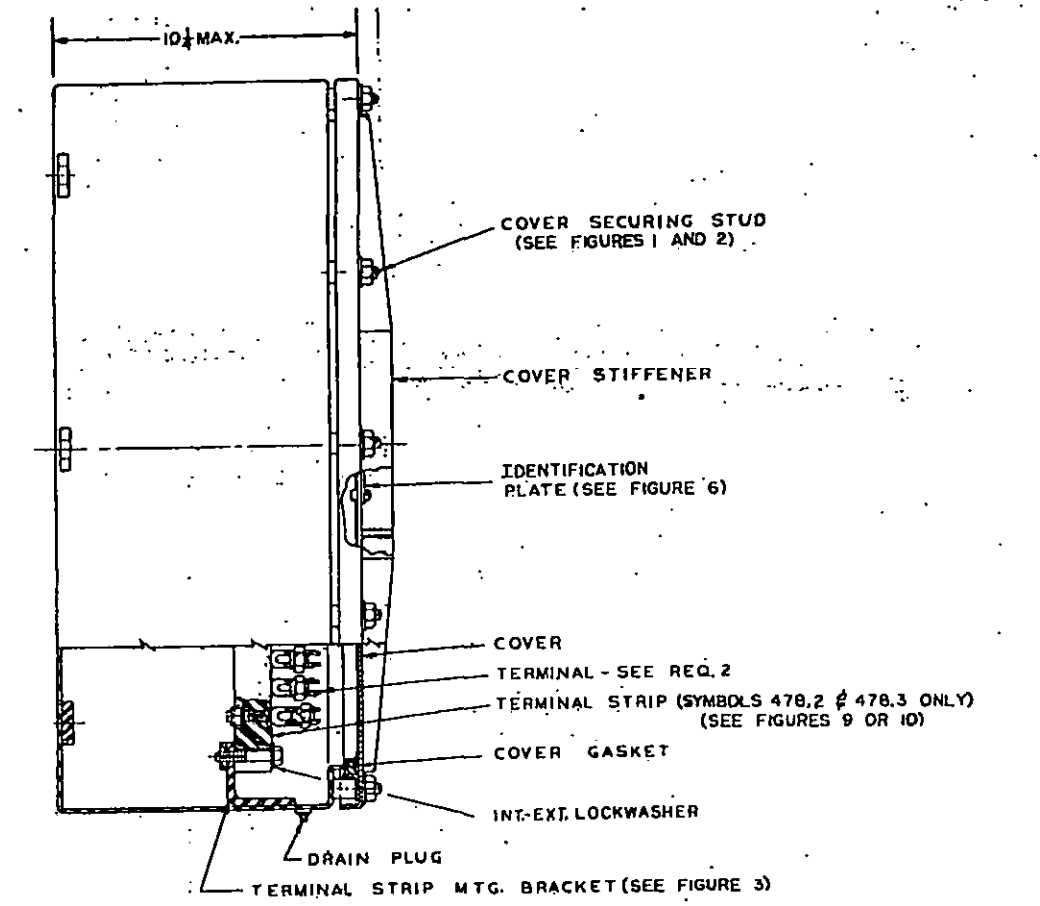

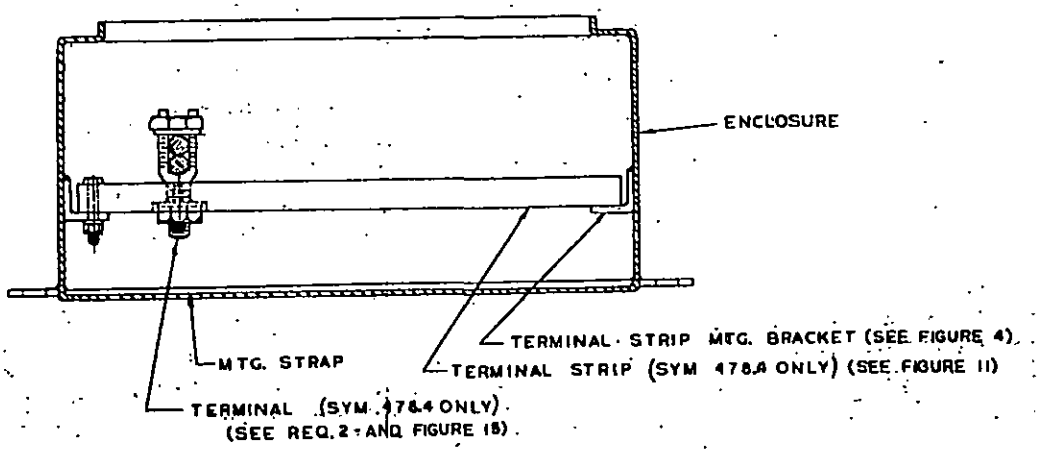

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Connection boxes shall have the number of terminals as specified in table I.
2. Terminals shall conform to table II and shall accommodate the wire sizes specified in table I.
3. The symbol numbers of Drawing 9000-S8106-73143 have been replaced by this specification sheet as follows:

Specification sheet	Drawing 9000-S8106-73143
478.2	478
478.3	478
478.4	478.1

Table I - Assembly data.

Symbol number	Number of 2 conductor terminals	Terminal wire size C.M.	Terminal (see figure 15)	Terminal strip	Terminal strip and terminals assembly Military part no.	Enclosure Military part no. M24404/2
478.2	40	6,500 to 13,090	See table II	Figure 9	M24404/1-002	-001
478.3	40	14,000 to 60,090		Figure 10	M24404/1-003	-001
478.4	10	75,000 to 200,000		Figure 11	M24404/1-003	-002

Table II - Stud terminal dimensions.

Symbol number	Wire size	C (inches)	D thread	E (inches)	F	G	H
478.2	12-8 AWG	1	1/4-20UNC-2	1-13/16	Use of pin is optional		
478.3	8-2 AWG	1-1/8	3/8-16UNC-2	2-1/2			
478.4	1-4/0 AWG	1-1/2	5/8-11UNC-2	3-3/4			

Preparing activity:
Navy - SH
(Project 1075-N020)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-158/1890

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:50Z
Check the source to verify that this is the current version before use.