INCH-POUND
A-A-50016C
January 12, 2022
SUPERSEDING
A-A-50016B
May 18, 2001

COMMERCIAL ITEM DESCRIPTION

GLOVES, MEN'S; CLOTH, LEATHER PALM, KNITTED WRISTLET

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description covers the requirements for men's gloves; cloth, leather palm, knitted wristlet.

2. CLASSIFICATION. The men's gloves shall be of one (1) size as described in this commercial item description.

3. SALIENT CHARACTERISTICS.

3.1 Description. The gloves shall utilize a Gunn cut pattern, leather palm with cotton flannel back, and a knitted wristlet.

3.2 Materials.

3.2.1 Leather. The leather for the palm, the front of fingers, the front and back of the thumb, the back of the finger tips and protective welt for seam joining front of fingers (fourchettes) to the palm shall be chrome tanned, flesh split from cattlehide bends in accordance with MIL-DTL-32092, Type VIII. Both sides of the leather shall be smooth and free of loose flesh. Middle splits, head splits, and shoulder splits shall not be used. All leather parts except the welt shall be 2-1/2 to 3-1/2 ounce thick when tested as specified in ASTM D1813. (Note: one ounce is equivalent to 1/64 inch). The welt shall be 1-1/2 to 2-1/2 ounces thick when tested as specified in ASTM D1813. The color of all leather components shall be cream or light (pearl) gray color. All leather components used in each pair of gloves shall be of the same color.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Attn: DLA Troop Support, 700 Robbins Avenue, Philadelphia, PA 19111-5096. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System (ASSIST) online database https://assist.dla.mil/.

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3.2.2 Cloth, fannel, cotton. The back of the glove shall be a napped cotton canton flannel, minimum weight seven (7.0) ounces per square yard when tested as specified in ASTM D3776/D3776M, with the napped surface facing the hand. The palm, front of the fingers, and front of the thumb shall be lined with cotton flannel, minimum weight five (5) ounces per square yard, when tested as specified in ASTM D3776/D3776M. The napped surface of the lining shall face the hand.

3.2.3 Knitted, cotton tubing. The knitted cotton wristlet shall be a 1-by-1 rib knit seamless tubing weighing from nine (9) to 15 yards per pound when tested as specified in ASTM D3776/D3776M.

3.2.4 Stitches, seams and stichings. Stitches, seams and stitchings types shall confirm to ASTM D6193. Seaming the bottom edge of the knitted wristlet and the top of hand portion at wrist with seam Type SSA-2 combination of overedge stitch type of class 500 (512, 514 or 516). The minimum and maximum number of stitch per inch for both leather and cloth shall be 8-10 stiches per inch.

3.2.5 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.2.5.1.

3.2.5.1 Presence of labile sulfur test. Two (2) 1.50 (± 0.01) gram samples from each sample unit shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. Prepare an acidic tin(II) chloride (stannous chloride) solution by dissolving 100 g SnCl2 (ACS grade) in 100 mL of 35% hydrochloric acid (ACS grade) and adding the mixture to 50 mL of distilled water. Prepare a lead acetate solution by dissolving 5.0 g of lead acetate (CP reagent grade) in a small amount of distilled water and diluting to a total of 100 mL. If the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The samples shall be submersed the acidic tin(II) chloride solution. A filter paper wet out with the lead acetate solution shall be placed over the top of the test tube. The test tube containing the textile sample, tin(II) chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Free - The filter paper shows no discoloration or staining of any kind.
Slight - The filter paper shows a light tan to light brown discoloration stain.
Moderate - The filter paper shows a dark brown discoloration stain.
Severe - The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as "pass" or "fail.

3.3 Dimensions. The finished men's gloves shall conform to the measurements specified in Table I when measured in accordance with Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional examination.

Location 1/	Inches	Tolerance (inch)
A. Overall length, tip of 2nd (middle) finger to top of cuff.	10-1/4	± 1/2
B. Hand length; tip of 2nd (middle) finger to wrist seam	7-1/2	± 1/4
C. Width of glove across palm from base of the thumb.	5-1/4	± 1/4
D. Length of cuff, top to wrist seam	2-3/4	± 1/8
E. Width of cuff, top opening	2-1/2	± 1/4

1/ See Figure 1.

3.4 Labels. A commercial-type label is acceptable, provided that an additional printed cloth label containing the contractor's name, contract number, size and National Stock Number (NSN) is caught on the stitching of the commercial label. The commercial label shall include fiber and laundering information.

3.4.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag will be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13-digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.5 Toxicity. The cloth used on the finished glove shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.5.1. Chemicals recognized by the Environmental Protection Agency (EPA) as human carcinogens shall not be used.

3.5.1 Toxicity test. When required (see 7.4), an acute dermal irritation study and a skin sensitization study shall be conducted. When the results of the studies indicate the cloth is not a sensitizer or irritant, a Repeat Insult Patch Test shall be performed in accordance with the Modified Draize Procedure (see 7.3). If the toxicity requirement (see 3.5) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.4).

3.6 Workmanship. The finished men’s gloves shall conform to the quality of the product established in this document. The men’s gloves shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the bid package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable. (See 7.1.2).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The men's gloves shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The glove offered or generic equivalent, must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

5.4 Visual examination. Each men's gloves shall be examined for the defects listed in Table II as defined in ASTM D3990. The sample unit shall be one glove and the selection shall be by pairs.

TABLE II. Visual examination defects.

Material defects: Any hole, cut, tear; any spot or stain on outside, color not as specified, any part shaded, or any serious material defects. (Up to 3 needle holes are acceptable).
Stitches, seams and stitching: Loose or tight stitching tension, raw edges, thread ends not removed, open seams.
Workmanship: Distorted parts or poor workmanship, any component part omitted, measurement of item not as specified.
Labels: Label(s) missing, incorrect, or illegible; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item; bar code causes damage to the item.
Packaging: Not packaged in accordance with the contract or purchase order.

5.5 Dimensional examination. The finished men's gloves shall conform to the dimensions specified in Table I when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) glove.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

6. PACKAGING.

6.1 Packaging. The preservation, packing and marking shall be as specified in the contract or order (see 7.4).

7. NOTES.

7.1 Source of government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13693 information are available online at https://www.epa.gov.

7.1.3 16 CFR Part 303 - Rules and Regulations under the Textile Fiber Products Identification Act are available online at https://www.ftc.gov.

7.1.4 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.2 Sources for Non-Government documents.

7.2.1 ASQ/ANSI Z1.4 – Sampling Procedures and Tables for Inspection of Attributes are available online at https://www. asq.org.

7.2.2 ASTM Standards are available online at https://www.astm.org.

7.3 Modified Draize Procedure (Repeat Insult Patch Test): Principles and Methods of Toxicology, A Wallace Hayes (editor) is available online at https://www.crcpress.com

7.3 Intended use. The gloves are primarily work gloves for use by Military personnel and civil Government agencies.

7.4 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this commercial item description
b. When toxicity testing is required (see 3.5 and 3.5.1)
c. Product conformance provisions. (see 5.1)
d. Acceptance criteria (see 5.6)
e. Packaging requirements (see 6.1).

7.5 Key words.

Cotton flannel
Gunn pattern

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

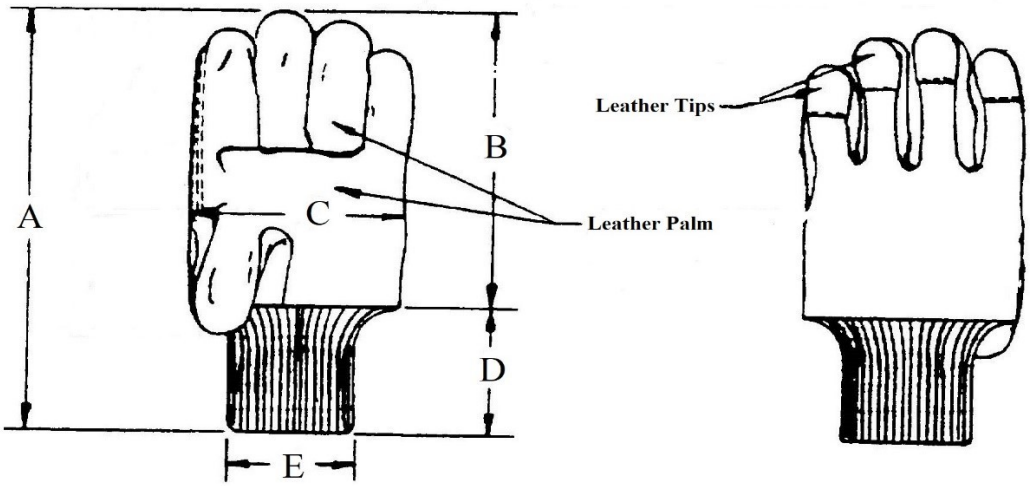


FIGURE 1. Gloves, men's – palm and back view.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS
JUS – FPI
USDA - AFS

Custodian:
Army – GL

Preparing Activity:
DLA – CT

(Project: 8415- 2022-001)

Review Activity:
Army - MD

Note: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.