INCH-POUND

MS17241C
7 January 2013
SUPERSEDING
MS17241B
21 March 1975


DETAILED SPECIFICATION SHEET

HEAT INTERCHANGER, REFRIGERANT - 12

INACTIVE FOR NEW DESIGN AFTER 21 NOVEMBER 1994.

This specification sheet is approved for all Departments and Agencies of the Department of Defense.

The requirements for acquiring the described herein shall consist of this specification sheet and procurement specification MIL-H-22832.

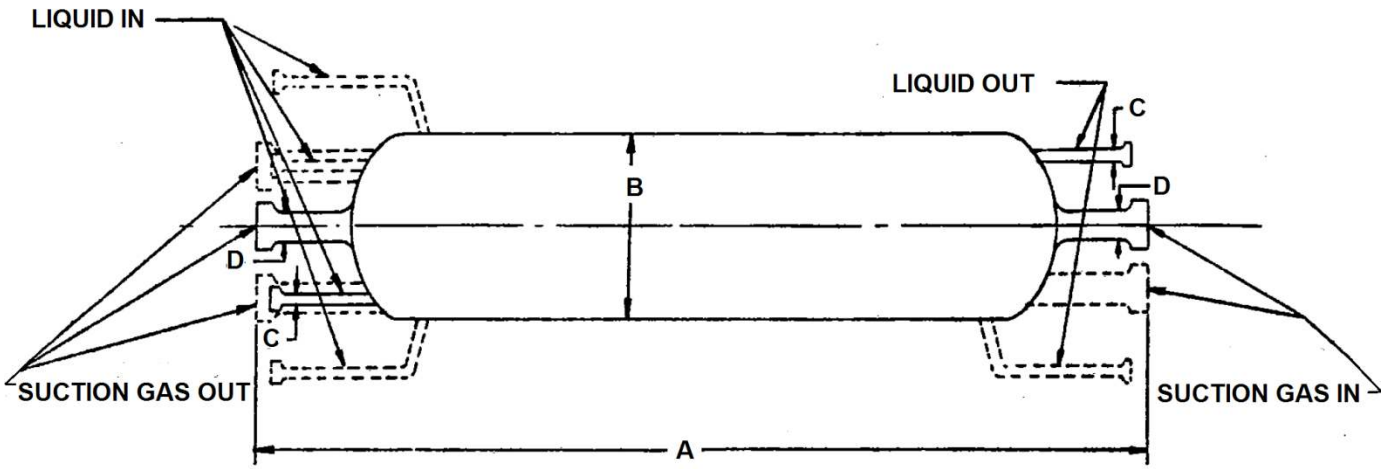

THE DOTTED LINES REPRESENT ACCEPTABLE LOCATIONS OF CONNECTION ENDS

FIGURE 1. HEAT INTERCHANGER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

PART NO.	CAPACITY (MIN)	DIMENSIONS		FEMALE SOLDER JOINT SIZE	
		A ±.500	B (MAX)	C	D
	T.R.	INCHES	INCHES	INCHES	INCHES
MS17241-1	1/12	9.500	1.625	.250	.500
MS17241-2	1/6	11.875	1.625	.250	.500
MS17241-3	1/4	15	2.125	.375	.625
MS17241-4	1/3	15	2.125	.375	.625
MS17241-5	1/2	15.250	2.250	,375	.875
MS17241-6	3/4	14.750	3.125	.375	1.125
MS17241-7	1	15.625	3.625	.500	1.125
MS17241-8	2	15.625	5	.625	1.375

NOTES:

1. Rating conditions: Interchangers shall be capable of raising the suction gas temperature from minus 5 °F, at a pressure corresponding to minus 10 °F. Saturated to plus 30 °F superheated leaving temperature, with the returning liquid temperature hot higher than 100 °F.

2. Materials: Shell – brass, copper, aluminum jacketed or steel, corrosion resistant treated.

3. Solder connection ends: Shall be in accordance with ASME B16.22.

4. Strength: Factory test pressure – 235 P.S.I.G. (MIN).
   Burst pressure (both circuits) – 1175 P.S.I.G. (MIN).

5. Pressure drop: Gas circuit – 1/4 P.S.I.G. at minus 10 °F, evaporated.
   1/2 P.S.I.G. at plus 25 °F, evaporated.
   Liquid circuit – Negligible.
   Dimension “A” may be obtained on shorter units by use of a tube extension supplied with the unit and having the same type end connection.
6. For design feature purposes this specification takes precedence over documents referenced herein.

7. Referenced documents shall be the issue in effect on the date of invitation for bids.

8. Part number: The MS part number consists of the MS number plus the dash number.
   Example: MS 17241-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.

9. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – GL
Navy – YD
Air Force – 99

Preparing Activity:
DLA-IS

(Project 4130-2013-001)

Review Activities:
Army – CE, MD
Navy – MC, SH
Air Force – 84
DLA-GS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:05Z
Check the source to verify that this is the current version before use.