
(Project 8110-0280)

FED. SUP CLASS
8110

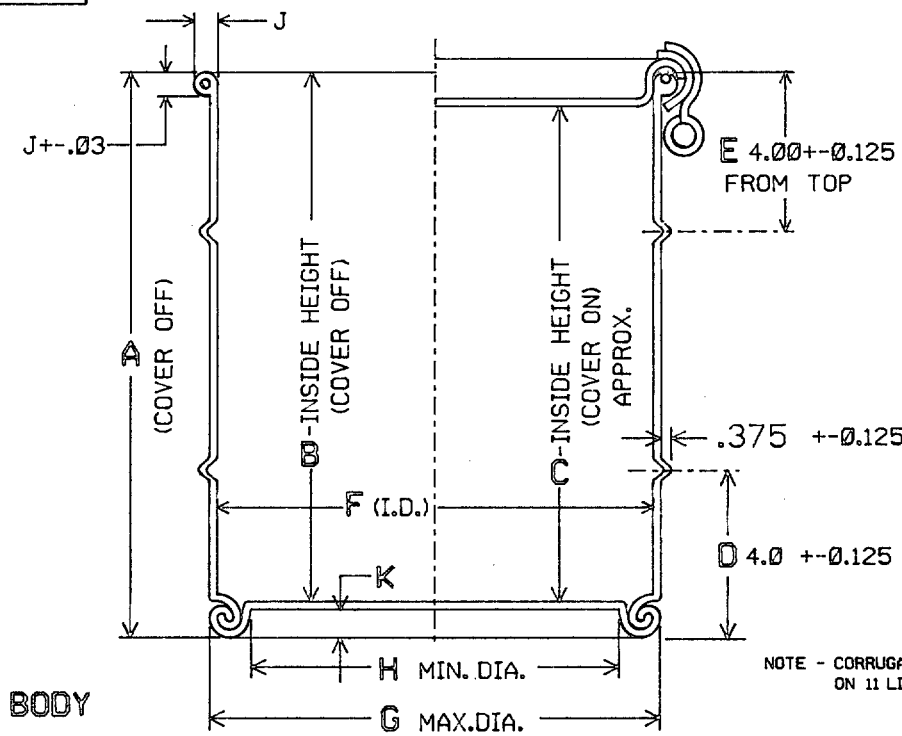

BODY

NOTE - CORRUGATIONS NOT REQUIRED ON 11 LITRE DRUM

DRUM ASSY NUMBER	CAP GAL	BODY	COVER STYLE °1	COVER STYLE °2	DRUM HEIGHT A	B	C	DRUM DIAMETERS F	G	H	OTHER DIM. J		K	APPROX. WT.
MS27684-1	3	MS27684-11	MS27684-21	MS27684-22	9.34	8.56	8.08	10.50	10.26	9.93	0.25		0.75	7.5
MS27684-1A	3	MS27684-11A	MS27684-21A	NA	8.30	7.52	7.04	11.25	11.00	10.41	0.25		0.75	8.5
MS27684-2	4	MS27684-12	MS27684-21	MS27684-22	14.12	13.34	12.86	10.50	10.26	9.93	0.25		0.75	8.0
MS27684-2A	4	MS27684-12A	MS27684-21A	NA	12.46	11.68	11.20	11.25	11.00	10.41	0.25		0.75	8.0
MS27684-3	6	MS27684-13	MS27684-21	MS27684-22	18.00	17.22	16.74	10.50	10.26	9.93	0.25		0.75	10.0
MS27684-3A	6	MS27684-13A	MS27684-21A	NA	15.84	15.06	14.58	11.25	11.00	10.41	0.25		0.75	10.0
MS27684-5	7	MS27684-15	MS27684-21	MS27684-22	20.00	19.22	18.74	10.50	10.26	9.93	0.25		0.75	11.0
MS27684-5A	7	MS27684-15A	MS27684-21A	NA	17.58	16.80	16.32	11.25	11.00	10.41	0.25		0.75	11.0
MS27684-6	8	MS27684-16	MS27684-21	MS27684-22	22.74	21.96	21.48	10.50	10.26	9.93	0.25		0.75	11.5
MS27684-6A	8	MS27684-16A	MS27684-21A	NA	19.97	19.19	18.71	11.25	11.00	10.41	0.25		0.75	11.5
MS27684-7	9	MS27684-17	MS27684-23	MS27684-24	15.38	14.75	14.19	13.81	13.56	13.17	0.31		0.59	13.0
MS27684-7A	9	MS27684-17A	MS27684-23A	NA	15.00	14.37	13.81	14.00	13.75	13.19	0.31		0.59	13.0
MS27684-8	12	MS27684-18	MS27684-23	MS27684-24	20.88	20.25	19.69	13.81	13.56	13.17	0.31		0.59	16.00
MS27684-8A	12	MS27684-18A	MS27684-23A	NA	20.35	19.72	19.16	14.00	13.75	13.19	0.31		0.59	16.00

MATERIAL: STEEL, SPECIFICATION ASTM A366-72 (R79)
FINISH AND MARKING: SEE PROCUREMENT SPECIFICATION
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED,
TOLERANCE, HEIGHT PLUS OR MINUS 0.125
DIAMETER PLUS OR MINUS .030,
ANGLES PLUS OR MINUS 2 DEGREE
ROLL CORRUGATIONS PLUS OR MINUS 0.125 INCH

BODY AND BOTTOM: MS27684-11 THRU MS27684-16 22 GAGE MIN.
MS27684-17 AND MS27684-18 20 GAGE MIN.

NOTE: CAPACITY IN GALLONS IS APPROXIMATE.
TO CONVERT GALLONS TO LITRES MULTIPLY BY 3.785

°REDRAWN

APPROVED 14 MARCH 69 REVISED (A) 10 JUNE 69 (B) 29 MARCH 74 (C) 14 May 1987

USER ACTIVITIES: AV-EA-CG-MC-MS
REVIEWER ACTIVITIES: 99-MI-OS-GS-SA-SM

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.


P.A. AF - 69 Other Cust NAVY - AS ARMY - GL AF - 69	INTERNATIONAL INTEREST	TITLE: DRUMS, METAL-SHIPPING AND STORAGE 3 TO 12 GALLONS	MILITARY STANDARD MS27684
PROCUREMENT SPECIFICATION: MIL-D-6054	SUPERSEDES: MS63047, MS63048, MS63049, MS63052		SHEET 1 OF 3

DD FORM 672-1 AMSC N/A


Distribution Statement A. Approved for public release; distribution is unlimited. 8110-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.


FED. SUP. CLASS
8110

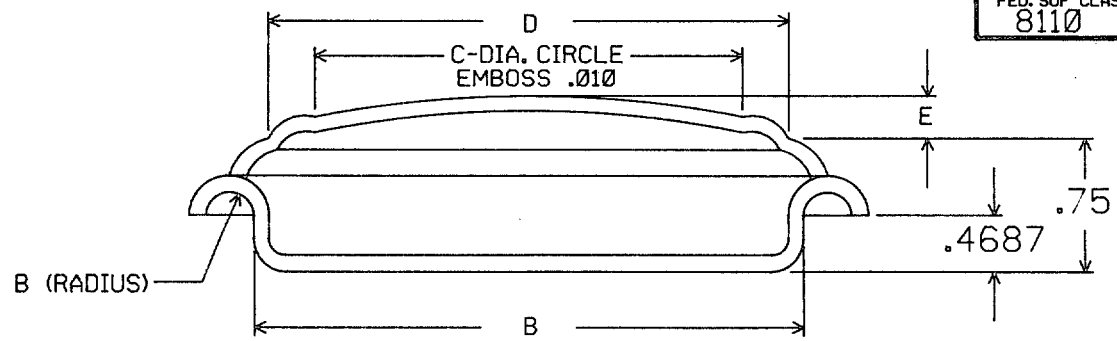

ALT. COVER (STYLE 2)

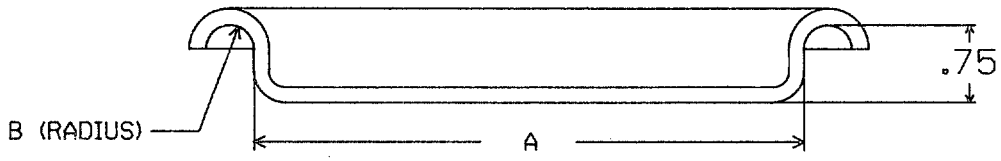

COVER (STYLE 1)

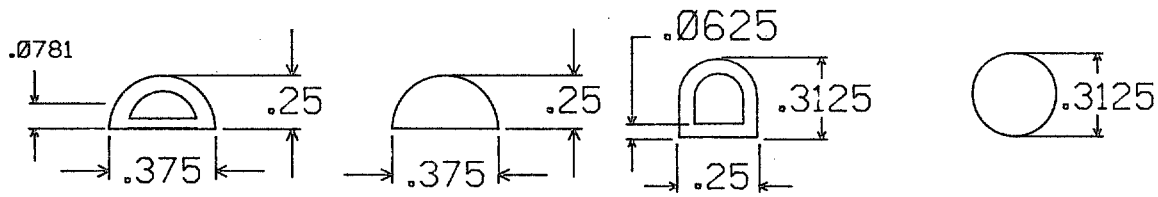

GASKET MS27684-27

ALT. GASKET MS27684-28

GASKET MS27684-25

ALT. GASKET MS27684-26

SIZE 1

SIZE 2

COVER	A	B	ALT. COVER	A	B	C	D	E	GASKET	ALT. GASKET
MS27684-21	10.44	.1562	MS27684-22	10.44	.1562	8.75	9.81	.625	MS27684-25	MS27684-26
MS27684-21A	11.19	.1562	NA						MS27684-25A	MS27684-26A
MS27684-23	13.75	.1875	MS27684-24	13.75	.1875	10.00	13.05	.4687	MS27684-27	MS27684-28
MS27684-23A	13.94	.1875	NA						MS27684-27A	MS27684-28A

MATERIAL: STEEL; SPECIFICATION ASTM A366
FINISH AND MARKING: IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

COVER: MS27684-21 AND MS27684-23 #20 GAGE (MIN.)
ALT. COVER: MS27684-22 AND MS27684-24 #20 GAGE (MIN.)

DIMENSIONS ARE INCHES...

REDRAWN

APPROVED 14 MARCH 69 REVISED (A) 10 JUNE 69 (B) 29 MARCH 74 (C) 14 May 1987

USER ACTIVITIES:

REVIEWER ACTIVITIES:


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE: DRUMS, METAL-SHIPPING AND STORAGE 3 TO 12 GALLONS	MILITARY STANDARD MS27684
PROCUREMENT SPECIFICATION MIL-D-6054	SUPERSEDES: MS63047, MS63048, MS63049, MS63052		SHEET 2 OF 3


DD FORM 672-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
8110

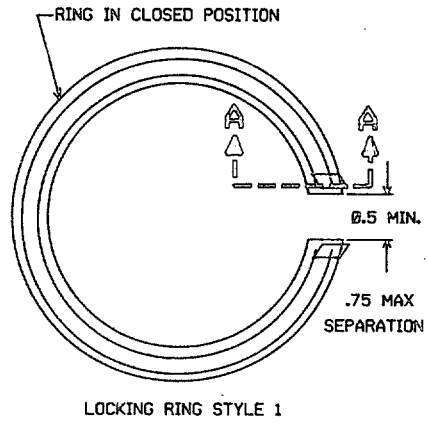


LOCKING RING STYLE 1

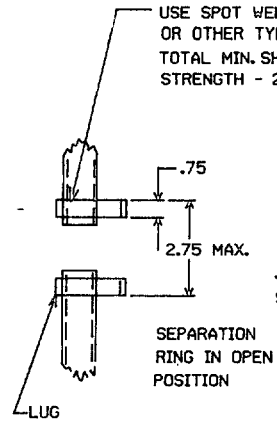


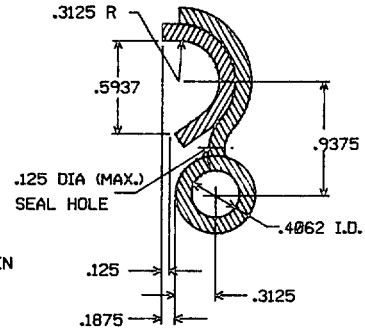


SECTION A-A

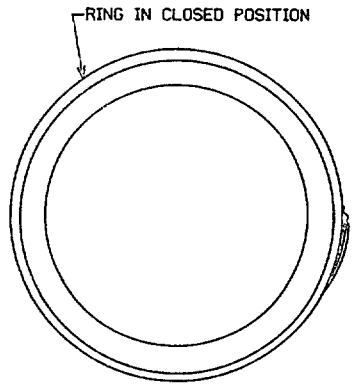

ALT. LOCKING RING STYLE 2



CAPACITY LITRE	STYLE 1 LOCKING RING	STYLE 2 LOCKING RING
11 THRU 30	MS27684-31	MS27684-35
11 THRU 30	MS27684-31A	MS27684-35A
34 THRU 48	MS27684-32	MS27684-36
34 THRU 48	MS27684-32A	MS27684-36A

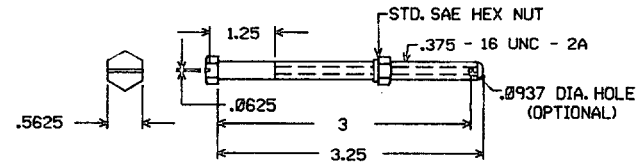

NUT & BOLT

MATERIAL: STEEL: SPECIFICATION ASTM A109

FINISH AND MARKING: IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

LOCKING RING: #13 GAGE
LUG: #12 GAGE

REDRAWN

APPROVED 14 MARCH 69 REVISED (A) 10 JUNE 69 (B) 29 MARCH 74 (C) 14 May 1987

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetive use shall be made from this document.

P.A. Other Cust	INTERNATIONAL INTEREST	TITLE: DRUMS, METAL-SHIPPING AND STORAGE 3 TO 12 GALLONS	MILITARY STANDARD MS27684
PROCUREMENT SPECIFICATION: MIL-D-6054	SUPERSEDES: MS63047, MS63048, MS63049, MS63052		SHEET 3 OF 3

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:48Z
Check the source to verify that this is the current version before use.