FED. SUP CLASS
5306

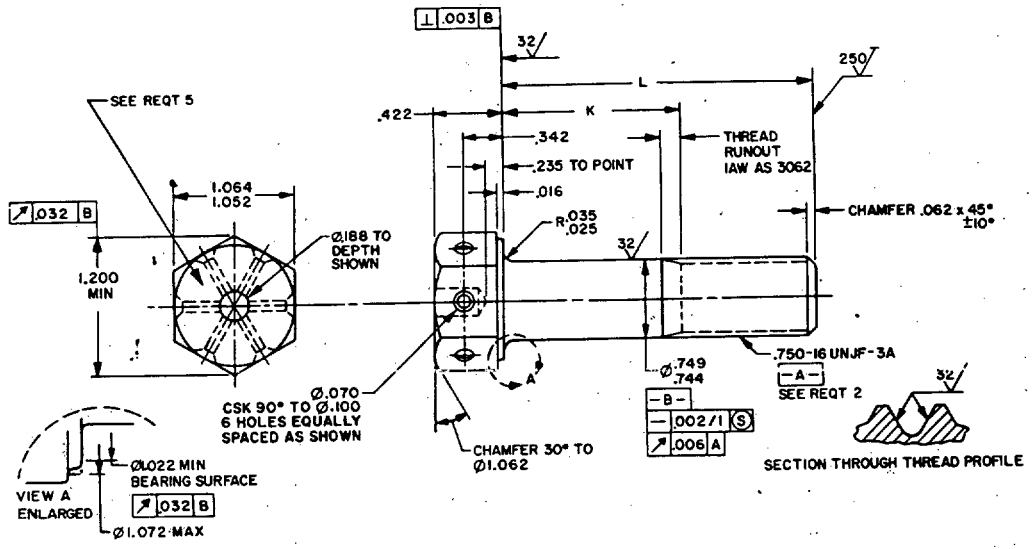


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	L	K	APPROX WEIGHT LB/100
-06	1.250	.129-.149	27.12
-07	1.312	.129-.149	27.76
-08	1.375	.129-.149	28.55
-09	1.438	.129-.149	29.33
-10	1.500	.129-.149	30.11
-11	1.562	.129-.149	30.89
-12	1.625	.129-.149	31.68
-13	1.688	.129-.149	32.46
-14	1.750	.129-.149	33.24
-15	1.812	.129-.149	34.03
-16	1.875	.129-.149	34.81
-17	1.938	.129-.188	35.59
-18	2.000	.190-.250	36.37
-19	2.125	.315-.375	37.94
-20	2.250	.440-.500	39.50
-21	2.375	.565-.625	41.17
-22	2.500	.690-.750	42.63
-23	2.625	.815-.875	44.20
-24	2.750	.940-1.000	45.86
-25	2.875	1.065-1.125	47.33
-26	3.000	1.190-1.250	48.89
-27	3.125	1.315-1.375	50.57
-28	3.250	1.440-1.500	52.02
-29	3.375	1.565-1.625	53.58
-30	3.500	1.690-1.750	55.15

DASH NO	L	K	APPROX WEIGHT LB/100
-31	3.625	1.815-1.875	56.71
-32	3.750	1.940-2.000	58.28
-33	3.875	2.065-2.125	59.84
-34	4.000	2.190-2.250	61.41
-35	4.125	2.315-2.375	62.97
-36	4.250	2.440-2.500	64.54
-37	4.375	2.565-2.625	66.10
-38	4.500	2.690-2.750	67.67
-39	4.625	2.815-2.875	69.23
-40	4.750	2.940-3.000	70.80
-41	4.875	3.065-3.125	72.36
-42	5.000	3.190-3.250	73.93
-43	5.125	3.315-3.375	75.49
-44	5.250	3.440-3.500	77.06
-45	5.375	3.565-3.625	78.62
-46	5.500	3.690-3.750	80.19
-47	5.625	3.815-3.875	81.75
-48	5.750	3.940-4.000	83.31
-49	5.875	4.065-4.125	84.88
-50	6.000	4.190-4.250	86.44

Ⓑ ENTIRE STANDARD REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - AS Other Cust AIR FORCE-99		BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .750-16 UNJF-3A	MS9591
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 1 OF 2

APPROVED 5 MAY 1965 REVISED Ⓑ 30 SEPT 87

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE - 82
ARMY - MI
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


5306-1186

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
4. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
5. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478 CLASS A.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9591-06



MS9591-06 INDICATES - BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK AMS 5731, .750-16 UNJF-3A x 1.250 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
AIR FORCE - 82
ARMY - MI
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 5 MAY 1965 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

P.A. NAVY - AS Other Cust AIR FORCE-99	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .750-16 UNJF-3A	MILITARY STANDARD MS9591
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 20261O-23T13:21Z
Check the source to verify that this is the current version before use.