INCH-POUND

MIL-F-52618/2C(ME)
29 June 1990
SUPERSEDING
MIL-F-52618/2B(ME)
20 August 1980

MILITARY SPECIFICATION SHEET

FITTINGS, PIPE, ALUMINUM-ALLOY (THREADED)

150-POUND

REDUCERS AND CLOSE AND OPEN PATTERN RETURN BENDS

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fittings described herein shall consist of this document and the latest issue of specification MIL-F-52618.

REQUIREMENTS:

The fittings shall be as shown in figure 1.

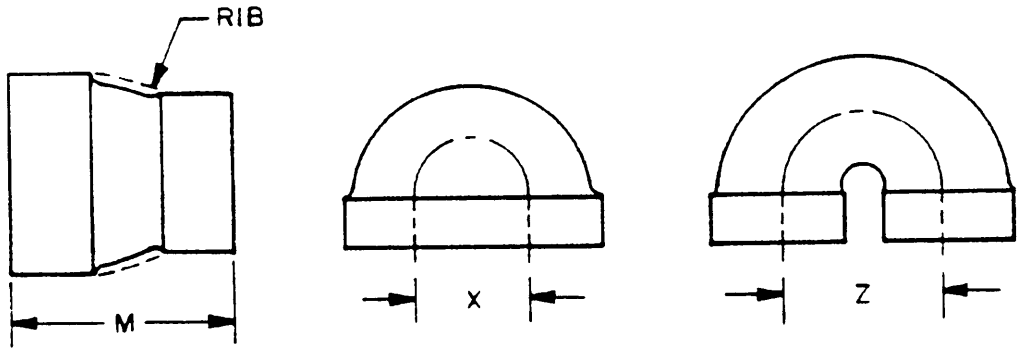


FIGURE 1. Reducers, close and open return bends.

X-3530

FSC 4730

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

Part or identifying number. The military specification sheet number, configuration code leter, size code numbers, thread direction code letter and finish code letter are combined to form the part or identifying number. PIN numbers are assigned as follows:

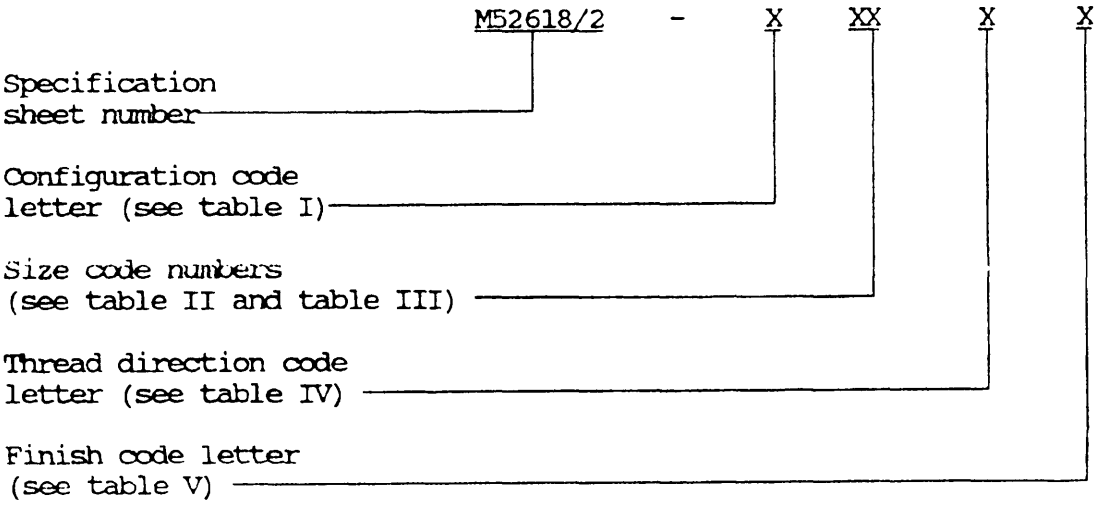


TABLE I. Configuration code letter for fittings.

Configuration code	Description
F	Reducers
G	Close pattern return bend
H	Open pattern return bend

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:27Z
Check the source to verify that this is the current version before use.

TABLE II. Size code numbers for reducers.

Size code numbers	Nominal pipe size (inch)x(inch)
24	1/2 X 3/8
25	1/2 X 1/4
26	3/4 X 1/2
27	3/4 X 3/8
28	3/4 X 1/4
29	1 X 3/4
30	1 X 1/2
31	1-1/4 X 1
32	1-1/4 X 3/4
33	1-1/2 X 1-1/4
34	1-1/2 X 1
35	1-1/2 X 3/4
36	2 X 1-1/2
37	2 X 1-1/4
38	2 X 1
39	2-1/2 X 2
40	3 X 2-1/2
41	3 X 2
42	4 X 3

TABLE III. Size code numbers for close and open pattern return bends.

Size code numbers	Nominal pipe size (inch)
04	1/2
05	3/4
06	1
07	1-1/4
08	1-1/2
09	2
10	2-1/2
11	3
12	3-1/2
13	4
14	5
15	6
16	8
17	10
18	12

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T21:27Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Thread direction code letter.

Code Letter	Thread direction
X	Right-hand
Y	Left-hand
Z	Right- and left hand

TABLE V. Finish code letter.

Code letter	Finish
A	As cast
B	As extruded
C	Anodized

Custodian:
Army - ME

Review activity:
DLA - CS

User activity:
Army - CE

Preparing activity:
Army - ME

Project 4730-A731

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.