


MS9018

FED. SUP CLASS (B) 5340

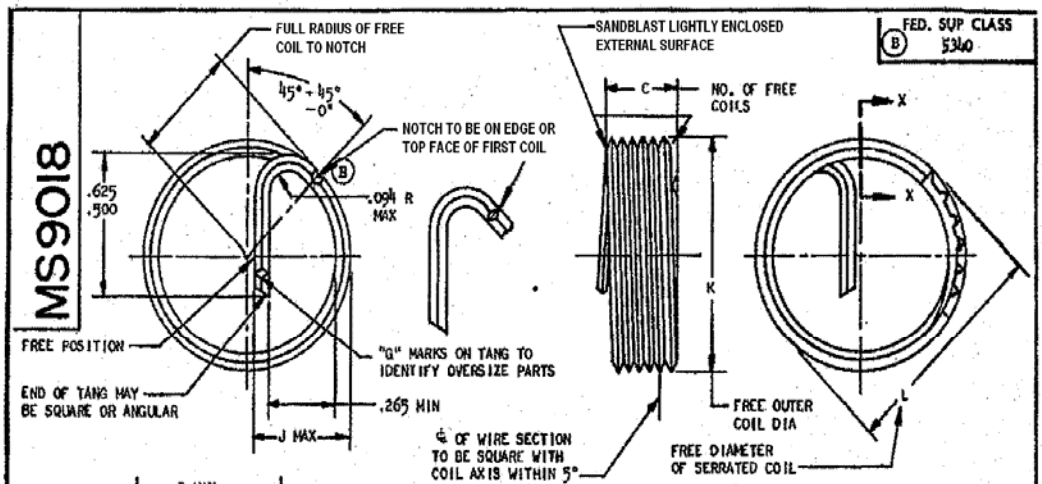

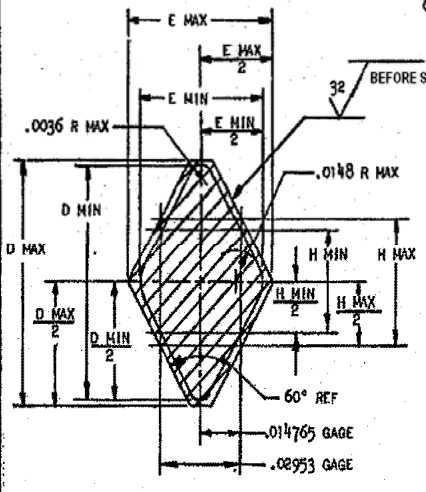

ENLARGED SECTION X-X

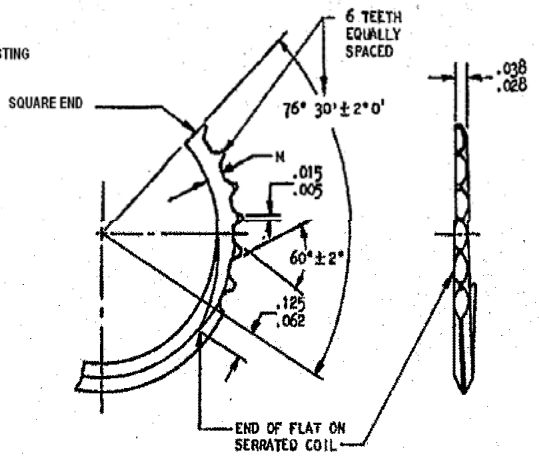

ENLARGED DETAIL OF SERRATED COIL

PART NUMBER	TYPE		NOTE 2 C ± 1/4 COIL	J MAX	K	L MAX	M ±.010	G NO. OF MARKS	APPROX. WEIGHT LB/100
MS9018-01	LONG REACH	STANDARD	9-1/2	.442	.885-.905	.915	.039	NONE	1.62
MS9018-02		+.003	9-1/2	.444	.885-.905	.915	.041	1	1.66
MS9018-03		+.005	9-1/2	.446	.885-.905	.915	.042	2	1.69
MS9018-04		+.010	9-1/2	.450	.885-.905	.915	.044	3	1.76
MS9018-09		+.015	9-1/2	.453	.905-.925	.935	.046	4	1.83
MS9018-10		+.020	9-1/2	.457	.905-.925	.935	.049	5	1.90
MS9018-11		+.025	9-1/2	.467	.905-.925	.935	.052	6	1.97
MS9018-05	SHORT REACH	STANDARD	4-3/8	.442	.885-.905	.915	.039	NONE	.75
MS9018-06		+.003	4-3/8	.444	.885-.905	.915	.041	1	.77
MS9018-07		+.005	4-3/8	.446	.885-.905	.915	.042	2	.79
MS9018-08		+.010	4-3/8	.450	.885-.905	.915	.044	3	.83
MS9018-12		+.015	4-3/8	.453	.905-.925	.935	.046	4	.87
MS9018-13		+.020	4-3/8	.457	.905-.925	.935	.049	5	.91
MS9018-14		+.025	4-3/8	.467	.905-.925	.935	.052	6	.95

STANDARD AND OVERSIZE WIRE DIMENSIONS

SIZE	H		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX
STANDARD	.0395	.0400	.0744	.0784	.0480	.0526
+.003	.0410	.0415	.0749	.0799	.0489	.0535
+.005	.0420	.0425	.0749	.0809	.0494	.0540
+.010	.0445	.0450	.0764	.0834	.0509	.0555
+.015	.0470	.0475	.0819	.0859	.0524	.0570
+.020	.0495	.0500	.0844	.0884	.0538	.0584
+.025	.0520	.0525	.0869	.0909	.0552	.0590

1. ASSEMBLED LENGTH OF INSERT TO BE AS SPECIFIED ON MS9071.
2. NUMBER OF FREE COILS TO BE COUNTED FROM NOTCH.
3. MATERIAL: STEEL, CORROSION RESISTANT, AMS 7245 (MATERIAL AND MFG).
(B) 4. SURFACE TEXTURE: USAS B46.1 - 1962.
5. SEE MS9071 FOR INFORMATION ON TAPPED HOLE FOR INSERT, INSERT ASSEMBLY, AND THREAD DIMENSIONS AFTER ASSEMBLY.
6. DIMENSIONS IN INCHES.
7. DO NOT USE UNASSIGNED PART NUMBERS.

(B) U. S. PATENT NO. 2607259, WHICH EXPIRES 19 AUG 69, MAY APPLY TO THIS ITEM. THE GOVERNMENT DOES NOT HAVE A ROYALTY FREE LICENSE.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. USAF - 11
Other Cust (B)
Army - AV
Navy - AS

TITLE: INSERT - 18-1.5MM AVIATION SPARK PLUG HELICAL COIL

MILITARY STANDARD
MS9018

PROCUREMENT SPECIFICATION: NONE

SUPERSEDES:

SHEET 1 OF 1

☆ U. S. GOVERNMENT PRINTING OFFICE 1968-341-361/A291

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 5340 - 0706

APPROVED 24 Apr 57
REVISED (A) 1 Oct 63 (B) 1 Jul 68

User activities:

Review activities:
Army - AV
Navy - AS
USAF - 11, 82

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.