
FED. SUP CLASS
4730

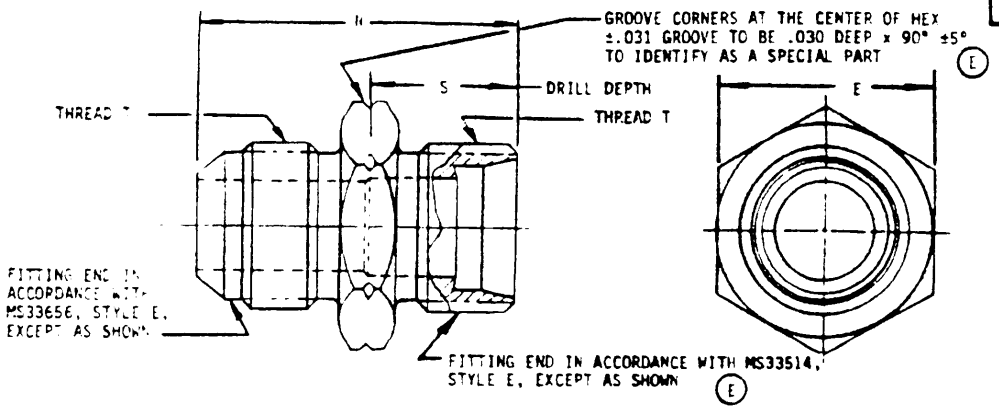

DASH NO.	TUBE OD	THREAD T MIL-S-8879	(a) E REF	N	S ±.031	WT LB MAX STEEL	AL ALLOY	TI ALLOY
-3	3/16	.3750-24 UNJF-3A	.625	1.156	THRU	.044	.015	.025
-4	1/4	.4375-20 UNJF-3A	.688	1.188	.563	.053	.019	.030
-5	5/16	.5000-20 UNJF-3A	.750	1.156	THRU	.060	.021	.034
-6	3/8	.5625-18 UNJF-3A	.813	1.281		.073	.026	.042
-8	1/2	.7500-16 UNJF-3A	1.000	1.469	.688	.133	.046	.076
-10	5/8	.8750-14 UNJF-3A	1.125	1.688	.781	.182	.065	.105
-12	3/4	1.0625-12 UNJF-3A	1.375	1.938	.875	.305	.109	.175
-16	1	1.3125-12 UNJF-3A	1.625	1.969	.844	.414	.145	.328
-20	1-1/4	1.6250-12 UNJF-3A	1.875	2.000	.875	.625	.209	.360
-24	1-1/2	1.8750-12 UNJF-3A	2.125	2.156		.820	.280	.473
-32	2	2.5000-12 UNJF-3A	2.750	2.469	.906	1.596	.510	.920

(a) FOR HEX DIMENSIONS AND TOLERANCES, USE MS33514, STYLE E.

REQUIREMENTS:

1. MATERIAL: TITANIUM ALLOY - BARS
   CARBON STEEL - BARS
   ALUMINUM ALLOY - BARS
   CORROSION RESISTANT STEEL - BARS
   } SEE PROCUREMENT SPECIFICATION

2. FINISH.

NOTES:

1. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

3. PART CODES
   NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
   ADD "D" IN PLACE OF DASH FOR ALUMINUM ALLOY (2024).
   ADD "W" IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
   ADD "J" IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
   ADD "K" IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
   ADD "T" AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).
   ADD "R" AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 321.

   EXAMPLE OF PART NUMBERS:
   MS21900-4 - ADAPTER, 1/4 TUBING, CARBON STEEL.
   MS21900D4 - ADAPTER, 1/4 TUBING, ALUMINUM ALLOY (2024).
   MS21900W4 - ADAPTER, 1/4 TUBING, ALUMINUM ALLOY (7075).
   MS21900J4 - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
   MS21900K4 - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
   MS21900-4T - ADAPTER, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).
   MS21900-4R - ADAPTER, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 321.

4. ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED "J", "K", OR "R" (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

5. TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS

6. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 347 CRES AFTER 30 SEPT. 1990. HOWEVER, TYPE CODE "S" PARTS MAY BE USED UNTIL EXISTING STOCKS ARE DEPLETED.

(E) ENTIRE STANDARD REVISED

APPROVED 4 OCT 94
REVISED (D) 28 JUNE 1991 (E) 24 OCT 1994

P.A	INTERNATIONAL INTEREST	TITLE: ADAPTER, FLARELESS TUBE TO A FLARED TUBE	MILITARY STANDARD
NAVY — AS Other Cust USAF - 99 ARMY - AV	(E)		MS21900
PROCUREMENT SPECIFICATION: MIL-F-1626[illegible]		SUPERSEDES: MS21900/A5B	SHEET 1 OF 2

DD FORM 1 JAN 72 672-1 (Cont'd) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 20000

PROJECT NO. 4730-0972

AMSC N/A

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

*Review/use information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

REVIEWER SYMBOLS: NAVY - AS, USAF - 82, ARMY - AR, MI, DLA - CS

USER'S: USAF - 71, ARMY - CL, CR, ME, AT

Source: https://assist.dla.mil -- Downloaded: 20261O-23T14:40Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

7. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

8. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER SYMBOLS:
USAF - 71
ARMY - CR, MF, AT

REVIEWER SYMBOLS:
NAVY - AS
USAF - 82
ARMY - AR, MI
DLA - CS

Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

AMSC N/A
DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 OCT 91

REVISED (E) FOR CHANGES SEE SHEETS 1 AND 2

P.A. NAVY — AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST (E)	TITLE ADAPTER, FLARELESS TUBE TO A FLARED TUBE	MILITARY STANDARD MS21900
PROCUREMENT SPECIFICATION MIL-F-18280	SUPERSEDES: MS21900(ASG)		SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.

PROJECT NO. 4730-0972