
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

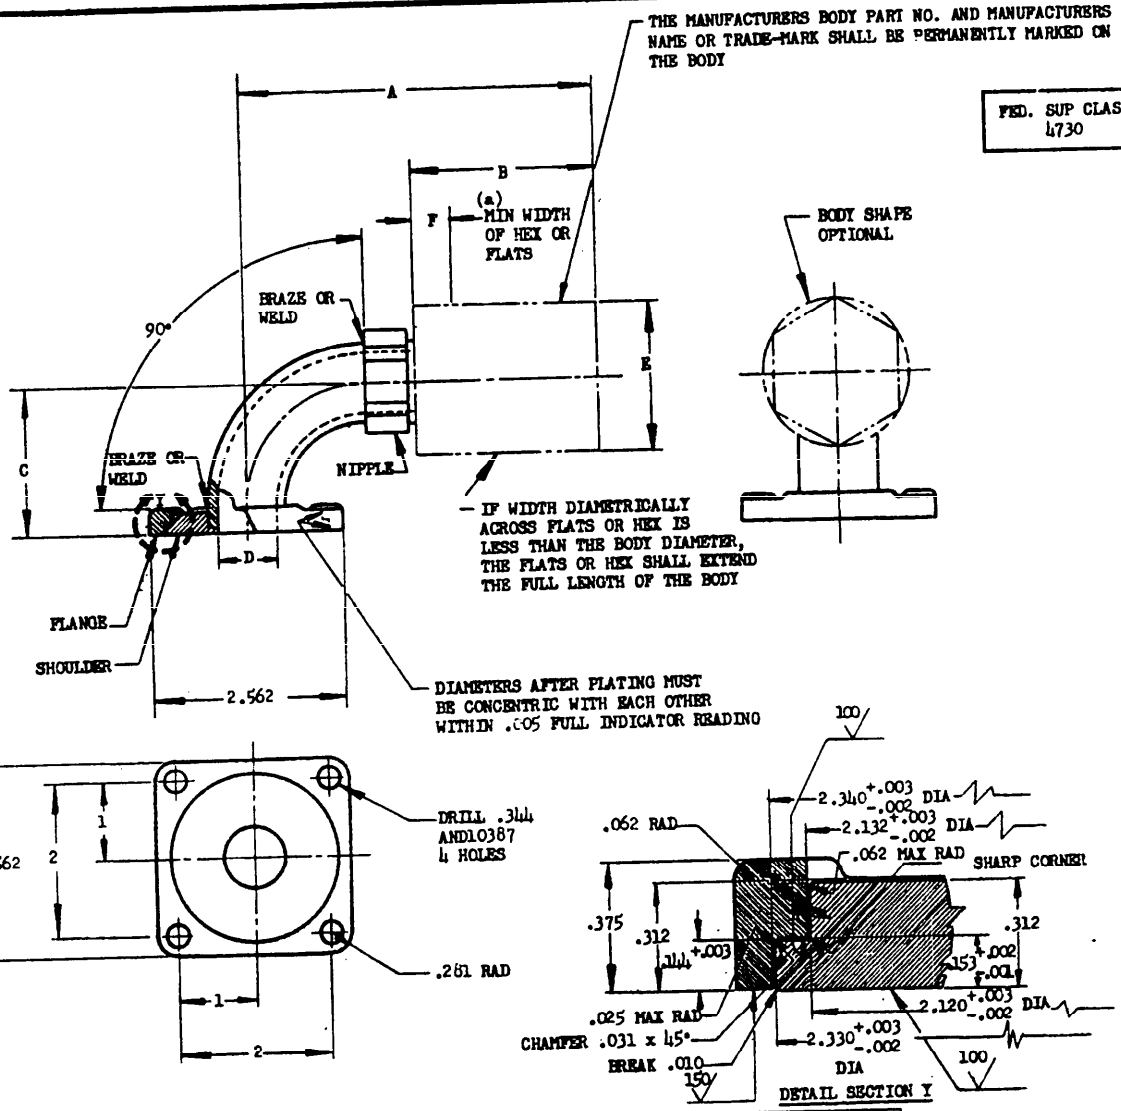


| MS PART NO. | TUBING OD | A MAX | B MAX | C | D DIA | E MAX DIA | F | WT LB APPROX |
|---|---|---|---|---|---|---|---|---|
| ~~MS28747-16~~ | ~~1~~ | ~~3.531~~ | ~~1.656~~ | ~~1.812~~ | ~~.815~~ | ~~1.562~~ | ~~.375~~ | ~~.669~~ |
| ~~MS28747-20~~ | ~~1.250~~ | ~~3.750~~ | ~~1.750~~ | ~~1.812~~ | ~~1.047~~ | ~~1.750~~ | ~~.500~~ | ~~1.120~~ |
| MS28747-24 | 1.500 | 4.406 | 1.844 | 2.312 | 1.281 | 2.188 | .625 | 1.215 |
| MS28747-32 | 2 | 5.375 | 2.250 | 2.812 | 1.750 | 2.625 | .875 | 1.369 |

(b)

**INACTIVE FOR DESIGN AFTER 22 MAY 1952. SEE DRAWING MS28750.**

(a) HEX OR FLATS SHALL FIT STANDARD WRENCH OPENINGS.
(b) PART NOS. MS-16 AND -20 INACTIVE FOR DESIGN AFTER 24 SEPTEMBER 1951. NO SUPERSEDING MS STANDARD.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

(B) MATERIAL: FLANGE: STEEL 1022, FORGING, SPECIFICATION MIL-S-7097. SEE PROCUREMENT SPECIFICATION.
NIPPLE AND SHOULDER: STEEL 1335, SPECIFICATION QQ-S-671
TUBING: STEEL 1010, SPECIFICATION MIL-T-5066A.
BODY: AL ALLOY, 24ST, SPECIFICATION QQ-A-696.

FINISH: STEEL: CADMIUM PLATE, SPECIFICATION QQ-P-416, OR ZINC PLATE, SPECIFICATION QQ-Z-325.
AL ALLOY: ANODIC FILM, SPECIFICATION MIL-A-8625.

(B) BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
(B) DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.

FOR ACCEPTABLE PRODUCTS, SEE QUALIFIED PRODUCTS LIST QPL-5070-1.

THE MS PART NO. AND THE MANUFACTURERS NAME OR TRADEMARK SHALL BE PERMANENTLY MARKED ON THE NIPPLE.

APPROVED 24 Sep 51 REVISED (A) 22 May 53 (B) 1 Jul 54

CUSTODIAN: Navy - Buer, Air Force
PROCUREMENT SPECIFICATION

# MILITARY STANDARD

FITTING END - HOSE, SWIVEL, DETACHABLE, FLANGED, 4 BOLT, 90°

# MS28747

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.