FED SUP CLASS
5935



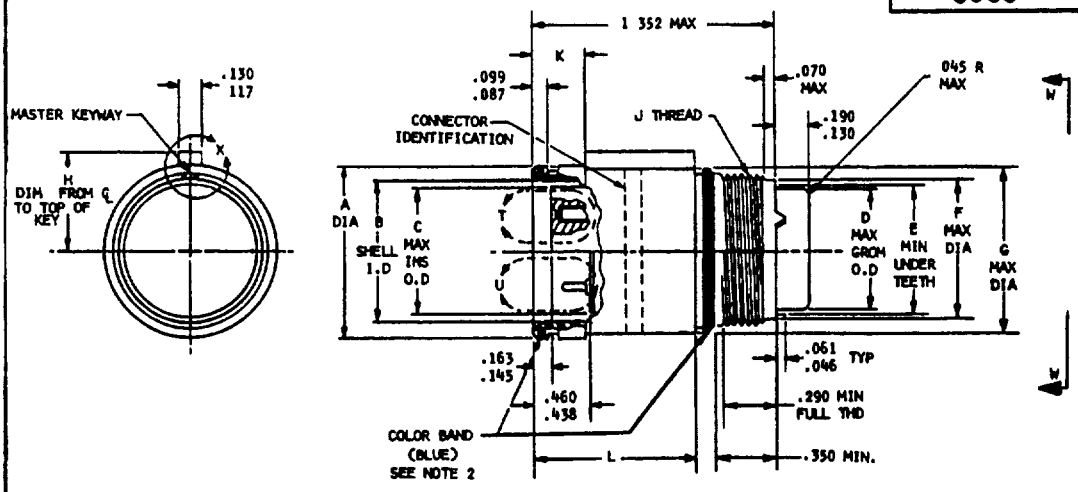



FIGURE I
CONNECTOR VIEW



DETAIL X

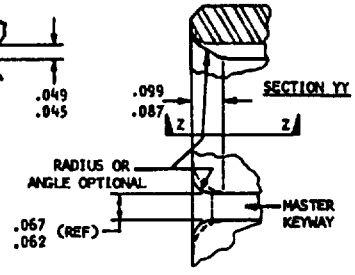


VIEW ZZ

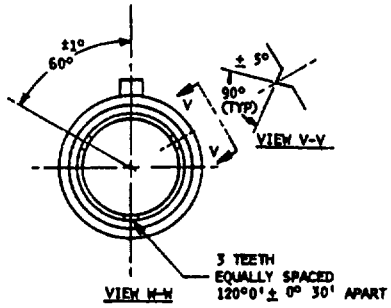


VIEW W-W

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR SOCKET CONTACT CHAMFER LEAD-INS AND PIN CONTACT RAISED SEAL BARRIERS.		
SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5, 6, 8, 9, 11 AND 12

***ON OUTER ROW CONTACTS OF INSERT ARRANGEMENTS INDICATED IN CHART

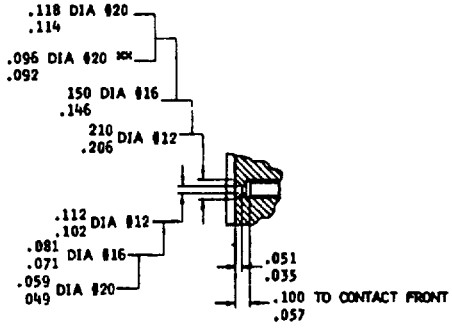

DETAIL T

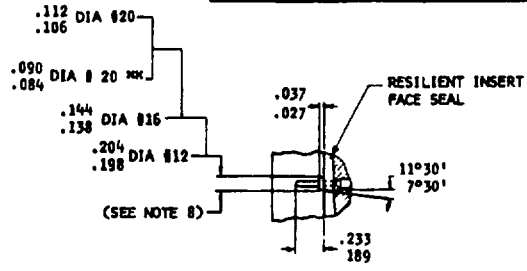

DETAIL U

APPROVED 21 July 1977 REVISED


P A NAVY-AS Other Cust	International interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, RACK AND PANEL, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3446 (NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES	SHEET 1 OF 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-N668-6


(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.


FED SUP CLASS
5935



ASSEMBLED TO STRAIGHT BACKSHELL
LESS STRAIN RELIEF
(SEE NOTE 3)




ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF
(SEE NOTE 3)

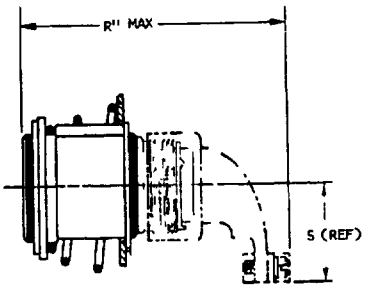


ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF
(SEE NOTE 3)

FIGURE II
BACKSHELL ACCESSORIES



PANEL CUTOUT DETAIL




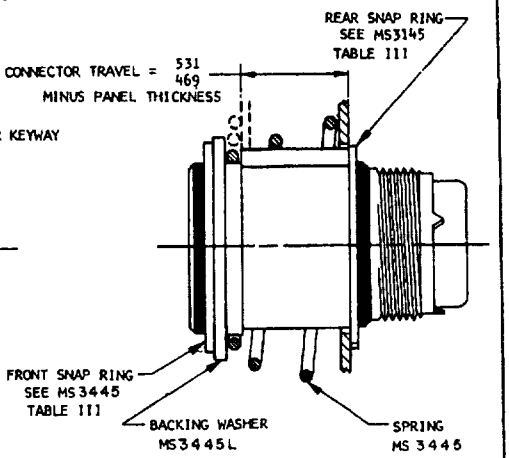


FIGURE III
CONNECTOR ASSEMBLY
VIEW

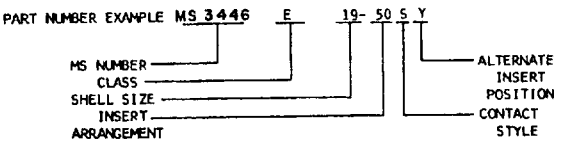

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, RACK AND PANEL, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3446(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

TABLE I
CONNECTOR & PANEL
CUTOUT DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	E	F	G	H	J THREAD
3	641/ 628	454/.446	330	351	441	509	615	442/ 422	9/16-24 UNEF-2A
7	797/ 784	589/ 581	451	531	613	687	760	504/ 484	3/4-20 UNEF-2A
12	920/ 907	723/.715	553	.665	731	812	867	567/ 547	7/8-20 UNEF-2A
19	1 048/1 035	862/.854	738	790	861	937	1 010	.639/ 619	1-20 UNEF-2A
27	1 189/1 176	1.017/1 009	854	869	919	992	1 150	709/ 689	1 1/16-18 UNEF-2A
37	1 356/1 343	1.139/1 131	978	994	1 044	1 117	1 322	796/ 776	1 3/16-18 UNEF-2A
61	1 673/1 660	1 427/1 419	1 271	1 280	1 361	1 427	1 635	951/ 931	1 1/2-18 UNEF-2A

SHELL SIZE	K	L	N	P	R	R'	R''	S
3	283/ 253	824/ 804	858/ 828	686/.656	1 660	2 010	2 218	850
7	332/ 302	817/ 797	999/ 969	.827/.797	1 660	2 010	2 420	950
12	337/ 307	817/797	1.124/1.094	.968/.938	1 660	2 240	2 510	1 010
19	335/ 305	817/797	1 249/1 219	1.077/1.047	1 660	2 240	2 640	1 070
27	334/ 304	805/ 785	1 390/1 360	1.218/1.188	1 660	2 240	2 740	1 130
37	343/ 313	805/ 785	1 546/1 516	1.390/1 360	1 660	2 240	2 870	1 190
61	382/ 352	.793/ 773	1 874/1.844	1 702/1 672	1.660	2,240	3 132	1 335

SHELL SIZE	WEIGHT MAX (LBS)	
	PIN INSERT	SOC INSERT
3		
7	WEIGHTS WILL BE SUPPLIED IN LATER REVISION	
12		
19		
27		
37		
61		

' WEIGHT LISTED IS FOR CONNECTOR WITH SNAP RINGS, BACKING WASHER SPRING AND MAX DENSITY INSERT ARRANGEMENT LESS CONTACTS AND BACKSHELL ACCESSORIES

1 THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTOR DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF MIL-C-81703

2 COLOR BAND .100 WIDE MAX BAND LOCATION MUST BE SUCH THAT IS IS VISIBLE WHEN THE CONNECTOR IS MOUNTED

3 CONNECTOR ASSEMBLY MUST INCLUDE A BACKSHELL TO MEET THE MOISTURE SEALING REQUIREMENTS OF THE PROCUREMENT DOCUMENT SEE MS3416 , MS 3417 AND MS 3418 FOR APPLICABLE BACKSHELL ACCESSORIES

4 MATERIALS SHELLS ALUM ALLOY QQ-A-591 COMP 13, 218, 380 OR 384

5 THE FINISH ON THE SHELL SHALL BE ELECTROLESS NICKEL

6 FOR MATING INFORMATION REFER TO MS3445 SHEET 5

7 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE XY =± 01 AND .XXX =±.005, ANGULAR, X°=±1°0' AND X°X' =±30'.

8 DIAMETERS SHOWN ARE AT BASE OF BARRIERS

APPROVED 21 July 1971 REVISED

P A NAVY-AS Other Cust	International interest	TITLE CONNECTOR, PLUG, ELECTRIC, CRIMP TYPE, RACK AND PANEL, SERIES 3 (CLASS L AND E)	MILITARY STANDARD MS 3446(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.