INCH-POUND

A-A-59421
7 April 1999
SUPERSEDING
MIL-S-11183F
31 December 1985

COMMERCIAL ITEM DESCRIPTION

SCALES, DIAL AND BEAM INDICATING, BAKER'S, DOUGH PIECE CHECKING

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-S-11183F for all federal agencies.

1. SCOPE. This commercial item description (CID) covers dial and beam indicating baker's scales.

2. CLASSIFICATION. The design shall be one of the manufacturer's current production models, with standard accessories offered by the manufacturer, to meet all the requirements specified. The scales shall be one of the following types and classes, as specified.

Type I - Over and under scale
Class 1 - Avoirdupois, 3-pound capacity
Class 2 - Metric, 1500-gram capacity

Type II - Even-balance scale, 5-pound capacity

3. SALIENT CHARACTERISTICS

3.1 Performance.

3.1.1 Accuracy. The scales and weights shall meet the applicable requirements of National Institute of Standards and Technology (NIST) Handbook 44 (Specification, Tolerances, and Other Technical Requirements for Weighing and Measuring Devices).

3.1.2 Certification. The scales shall be certified by NSF International or meet the requirements of NSF criteria C-2 (Special Equipment and Devices).

3.1.3 Overload. When subjected to a load and counterweight of 125 percent of the required capacity, the scales shall sustain no permanent deformation, bends, breakage, or separation of

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent by letter to: Commander, Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond VA 23297-5610.

AMSC N/A FSC 6670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

parts and shall return to the initial zero position when the load is removed.

3.2 Design and construction.

3.2.1 Type I. The type I scale shall be a bench scale with a dial indicator and a tare beam. The scale shall show an over or under weight indication on the dial face by a balance indicator when objects are placed on the load receiver. The scale shall have a platform load receiver and a weight platter (for removable weights) that counterbalance the weight of objects being weighed on the platform load receiver.

3.2.1.1 Class 1. The class 1 scale shall be designed to weigh in the avoirdupois weight system and shall have a minimum capacity of 3 pounds. The tare beam for the scale shall have a capacity of 1 pound with maximum graduations of 1/4 ounce. The dial indicator chart shall have an over and under indication of 1 ounce with maximum graduations of 1/4 ounce.

3.2.1.2 Class 2. The class 2 scale shall be designed to weigh in the metric system and shall have a minimum capacity of 1500 grams. The tare beam shall have a capacity of 500 grams with maximum graduations of 5 grams. The dial indicator chart shall have an over and under indication of 25 or 30 grams with maximum graduations of 5 grams.

3.2.1.3 Dial indicator. The dial indicator shall be readable from both ends of the scale and shall be enclosed in a metal housing. There shall be a clear enclosure over the chart. The dial indicator chart shall be marked to indicate the zero position and the over and under indication.

3.2.1.4 Tare beam. The tare beam shall be notched and shall have a poise. The poise shall not be detachable from the tare beam without the use of tools.

3.2.1.5 Damping device. The scale shall have a hydraulic damping device. The damping device shall be accessible for adjusting for temperature changes or for adjusting damping oscillation.

3.2.1.6 Load receiver and weight receiver. The load receiver and weight receiver shall be constructed of corrosion resisting material.

3.2.2 Type II. The type II scale shall be an even-balance bench scale with two 9-inch flat plates constructed of corrosion resisting material, a tare beam, and balance weights. One plate shall be used to hold the balance weights and the other plate shall be used to hold the item to be weighed. The scale shall be designed to weigh in the avoirdupois system and shall have a minimum capacity of 5 pounds. The tare beam shall have a capacity of 1 pound with maximum graduations of 1/4 ounce.

3.3 Weights and weight box. Weights shall be furnished with the scale as specified in table I. Weights shall be constructed of corrosion resisting material or shall be coated to resist corrosion. All weights shall be marked with the weight value. There shall be a wooden or durable plastic box to contain the weights.

TABLE I. Counter weights required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

Scale	Quantity	Weights
Type I, Class 1	2	1 pound
Type I, Class 2	1 2 1	500 grams 200 grams 100 grams
Type II	1 2	2 pounds 1 pound

3.4 Repair and maintenance. Provisions shall be made to allow for weight adjustment, service, and replacement of components without disturbing or disassembly of major components. There shall be free access to inspect, service, and adjust balance of tare beam and dial indicator, when applicable, without requiring disassembly of any component on the unit.

3.5 Workmanship. The finished scale shall have no burrs, slivers, splinters or broken, loose or missing fasteners.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with public law 94-580 or CFR 41CFR 1-1.25.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The scales provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Warranty. The manufacturer's standard commercial warranty shall apply.

6. PACKAGING. Preservation, packing and marking shall be as specified in the contract or order.

7. NOTES. This section contains information of a general or explanatory nature which is helpful, but is not mandatory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

7.1 Intended use. These scales are intended for use in bakeries to check the weight of dough pieces leaving the divider and before entering the proofer. The type II scale is primarily intended for use in field bakeries.

7.2 Sources of documents. Copies of documents may be obtained from the following addresses.

National Institute of Standards and Technology documents may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

NSF documents may be obtained from NSF International, P. O. Box 130140, Ann Arbor MI 48113-0140.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this description.
b. Type and class of scale required. (See 2.)
c. Packaging requirements. (See 6.)

7.4 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

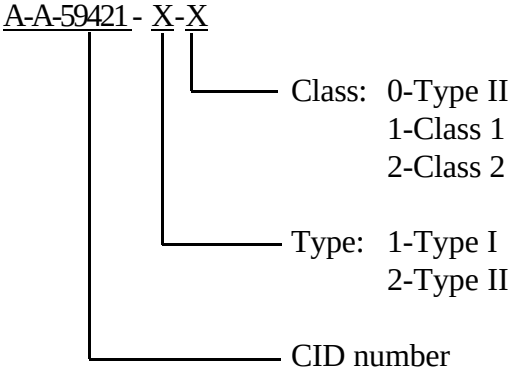

7.5 National stock number (NSNs). The following NSN corresponds to this CID. This NSN may not be indicative of all possible NSNs associated with this document.

NSN
6670-00-164-0550

7.6 Known sources of supply. The following is a list of sources whose products are known to meet the requirements of this CID. This list may not be indicative of all possible sources.

a. Detecto Division, Cardinal Scale Manufacturing Co., P. O. Box 151, Webb City, MO 64870

b. A-1 Scale Service, Inc., 4807 NW Industrial Drive, San Antonio, TX 78238

c. Algen Scale Corp., 68 Enter Lane, Hauppauge, NY 11788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian
Army - GL
Navy - YD1

Reviewers
Army - MD
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - GS

(Project No: 6670-0203)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:13Z
Check the source to verify that this is the current version before use.