DETAIL SPECIFICATION SHEET

CONNECTOR, MALE RECEPTACLE ELECTRICAL, RECTANGLAR,
POLARIZED SHELL, MINIATURE TYPE, PIN CONTACTS
(STYLE 004A)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-21617.

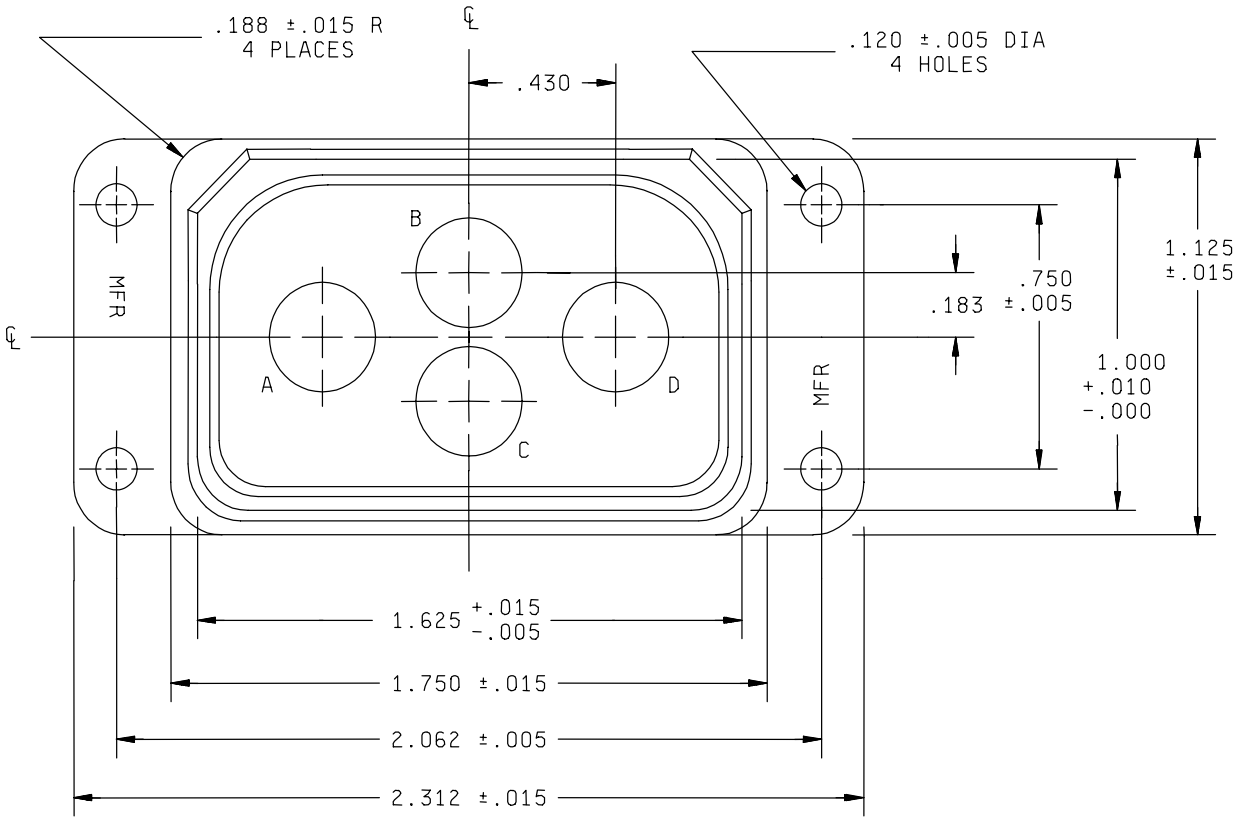

2 SIZE 4 CONTACTS
2 SIZE 8 CONTACTS

FIGURE 1. Type J, class M inserts containing pin contacts.

DISTRIBUTION STATEMENT A. Approved for public release; distribution if unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:05Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.750	19.05
.010	0.25	1.000	25.40
.015	0.38	1.125	28.58
.120	3.05	1.625	41.28
.183	4.65	1.750	44.45
.188	4.78	2.062	52.37
.430	10.92	2.312	58.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Type J, class M inserts containing pin contacts - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:05Z
Check the source to verify that this is the current version before use.

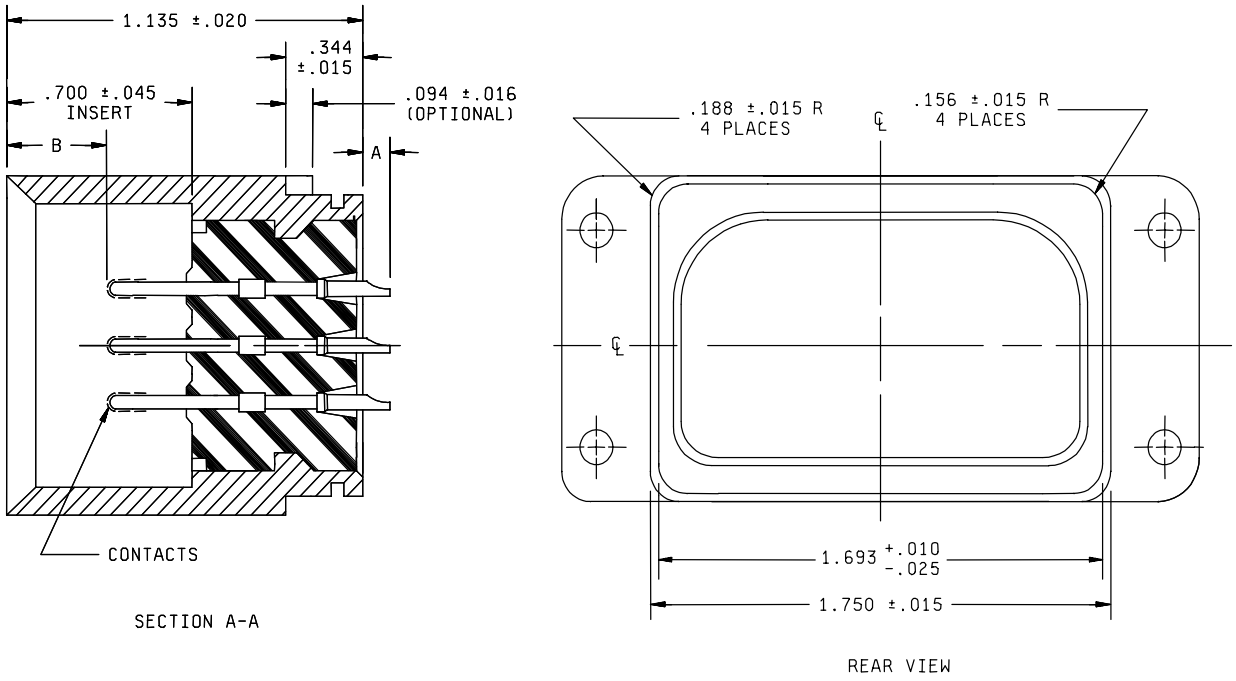

Dimension	Contact size	
	8 (mm)	4 (mm)
A (mm)	.312 ±.045 (7.92 ± 1.14)	.312 ±.045 (7.92 ± 1.14)
B (mm)	.057 ±.025 (1.45 ±0.63)	

Inches	mm	Inches	mm
.010	0.25	.156	3.96
.015	0.38	.188	4.78
.016	0.41	.344	8.74
.020	0.51	.700	17.78
.025	0.64	1.067	27.10
.045	1.14	1.135	28.83
.052	1.32	1.693	43.00
.094	2.39	1.750	44.45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Type J, class M large flange male receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Reference material: See MIL-DTL-21617.

Service rating: A (see MIL-DTL-21617).

Mating connector: See MIL-DTL-21617/1.

Contacts: Contacts shall be in accordance with MIL-DTL-21617.

Part or Identifying Number (PIN): PIN example as follows:

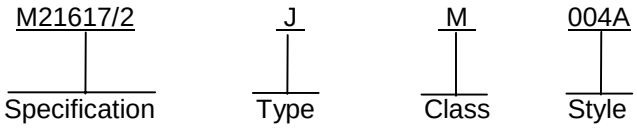

Type: J - Receptacle.
Class: M - Male, inserts containing pin contacts.
Style: 004A - Contacts, 2 size 8, 2 size 4.

Supersession data: Old PIN JM004A.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
DLA – CC

Review activities:
Army - AV, MI

Preparing activity:
DLA - CC

(Project 5935-4335-002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T10:05Z
Check the source to verify that this is the current version before use.