
FED. SUP CLASS
6640

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

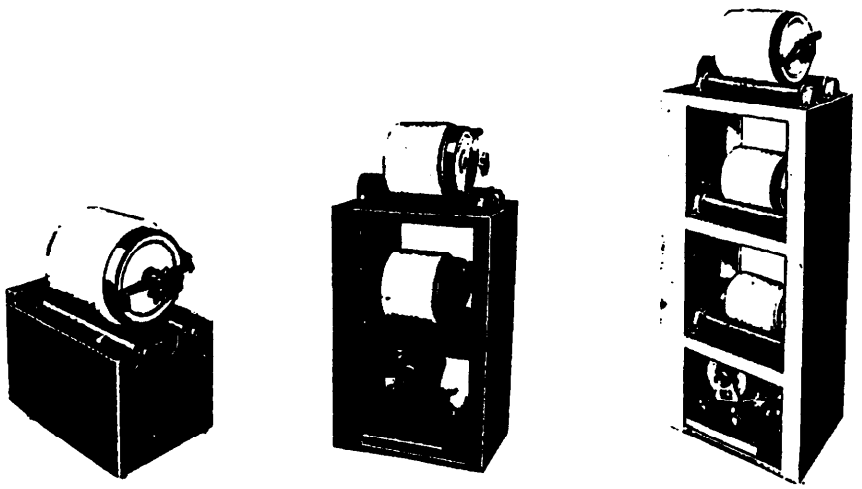

PART NUMBER	O/L DIMENSIONS (cm) LENGTH	WIDTH	HEIGHT	NUMBER OF TIERS
MS36242-1	40.6	26.7	27.0	1
MS36242-2	51.4	30.8	87.3	2
MS36242-3	51.4	30.8	127.3	3

MATERIAL: Mill shall be fabricated of welded steel with, copper-base oil-impregnated, bearings in accordance with ASTM B438.

DESIGN: The mills shall have sets of rollers that have one convex and the other concave for automatically centering the jars.

MS36242-1 shall have one tier that handles jars 5 to 33 cm diameter and at constant roll speed of 290 rpm. Unit shall be powered by a 1/4 hp, 115V AC, 60Hz single-phase, open type motor.

MS36242-2 shall have two tiers that handle jars 6.4 to 33 cm diameter at variable speeds of 160 to 320 rpm (motor requirements same as -1).

MS36242-3 shall have three tiers and handle jars 6.4 to 33 cm on the top two tiers and handle jars 10 to 33 cm on the lower tier. Speed shall be variable 160-320 rpm, powered by a 1/3 hp, 115V AC, 60Hz, single-phase, enclosed motor.

All electrical components shall conform to the standards of Underwriters Laboratory, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

APPROVED 22 JUN 1983 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		MILL, BALL AND JAR, LABORATORY	MS36242
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1188
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 2020-10-23 17:36Z
Check the source to verify that this is the current version before use.