INCH-POUND

A-A-55192
7 April 1993

COMMERCIAL ITEM DESCRIPTION

CASE, MAP

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-43769.

Abstract. This commercial item description covers map cases to be used to protect maps in the field.

Classification. There shall be one type of map case in the following sizes as specified:

Size 1 - 22 inches long by 30 inches wide (+1; -0 inches)
Size 2 - 38-1/2 inches long by 52-3/4 inches wide (+1; -0 inches)

Salient Characteristics. The map cases shall be constructed of two pieces of vinyl film and a vinyl zipper. The vinyl cases shall have heat sealed seams on three sides, the two long sides and one short side. The open end of the case shall be fitted with a vinyl zipper of appropriate length, heat sealed to the case. One part of the zipper shall be heat sealed to the back of the case and the other part heat sealed to the front part of the case. The ends of the zipper shall be heat sealed to prevent the slides from becoming disengaged. All heat sealed seams shall be a minimum of 1/8 inch wide, cleanly trimmed, with no unsealed film beyond permitted sealed area. The breaking strength of the heat sealed seams shall be not less than 16 pounds. See Figure 1.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Material. The film used in fabricating all map cases shall be 0.014 inch thick vinyl chloride or polyvinyl chloride conforming to type I, class 1 of L-P-375. Film shall meet the requirements for a 0.012 inch thick vinyl film. The zipper closure shall be made of a clear compound of vinyl chloride or polyvinyl chloride conforming to the resin material requirements specified in L-P-375. The zipper shall have a slider and pull made of aluminum.

Label. The label shall be the same as normally used by the contractor for retail distribution.

Sizes and Measurements. The finished case shall conform to the measurements below.

Table I. Sizes and Measurements

Size	Length (inches)	Width (inches)	Tolerance (inches)	Zipper Size (inches)	Heat Sealed Seam (inches) +.036,-0
1	22	30	+1, -0	22	1/8
2	38-1/2	52-3/4	+1, -0	38-1/2	1/8

Workmanship. The finished map case shall be clean, and free of all foreign matter on or in the map case.

Product Demonstration Model. When required, offerers shall submit samples of their intended production The Product Demonstration Model shall consist of units independently developed by the contractor in his own plant Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Quality Assurance

Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics and requirements of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract

Examination. Case lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The cases shall be examined for the defects listed below. The lot size shall be expressed in units of cases. The sample unit is one case. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0.

Defects. The case shall be examined for the following defects: not uniformly colorless and clear; not dull matte finish; objectionable odor; any blister or fish eye or unfused resin particles; seam not continuous, not uniform; poor heat seal resulting in inadequate fusion; corners not rounded; any hole, crack, wrinkle, tear, sharp crease or cut; any spot, stain, or other discoloration which requires a cleaning agent for removal; not clean, evidence of dirt, grit, oil, or other foreign matter on or in map case; zipper does not work properly; any rough or sharp edge; label missing, incorrect, or illegible; not constructed as specified.

Dimensional Examination. The finished case shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one case; the inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 2.5.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

End Item Performance Testing. The end items shall be tested for heat sealed seam breaking strength in accordance with method A of ASTM D 882 except that each specimen shall be cut 1 inch by 6 inches with the seam approximately in the middle and parallel to the short sides of the specimen. If the average breaking strength for any sample unit fails to meet the requirements specified, the lot shall be rejected.

Metric Product Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Regulatory Requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Packaging.

Overseas.

Packaging. Each map case shall be rolled from the bottom to the slide fastener end. The rolled case shall then be placed in a mailing tube.

Packing. Twenty size 1 cases or ten size 2 cases shall be packed in a fiberboard box conforming to style RSC, grade 275 of PPP-B-636. Inside box dimensions for the size 1 cases shall be approximately 23 inches in length, 14-1/2 inches in width, and 11-1/2 inches in depth. Inside box dimensions for the size 2 cases shall be approximately 39-1/2 inches in length, 18-1/2 inches in width, and 7-1/2 inches in depth. The box shall be closed in accordance with the appendix of PPP-B-636.

Palletization. Boxes shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D, or film bonding means F or G. Pallet pattern shall be number 90 for size 1 cases and number 89 for size 2 cases in accordance with the appendix of MIL-STD-147.

Marking. Marking shall be in accordance with MIL-STD-129.

Domestic.

Packaging, Packing, Palletization, and Marking. Packaging, packing, palletization, and marking shall be in accordance with ASTM D 3951.

Notes.

Acquisition Requirements. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Size of map case required.
c. When a product demonstration model (PDM) is required.
d. Whether overseas or domestic packaging is required.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

ASTM D 882 - Tensile Properties of Thin Plastic Sheeting
ASTM-D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Custodians:
Army-GL
Navy-NU


User Activity:
Navy-MC

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8460-0082

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

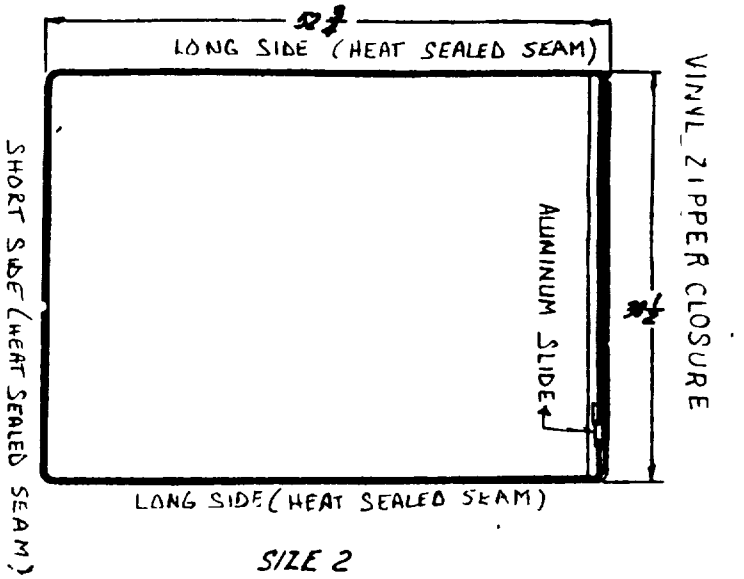

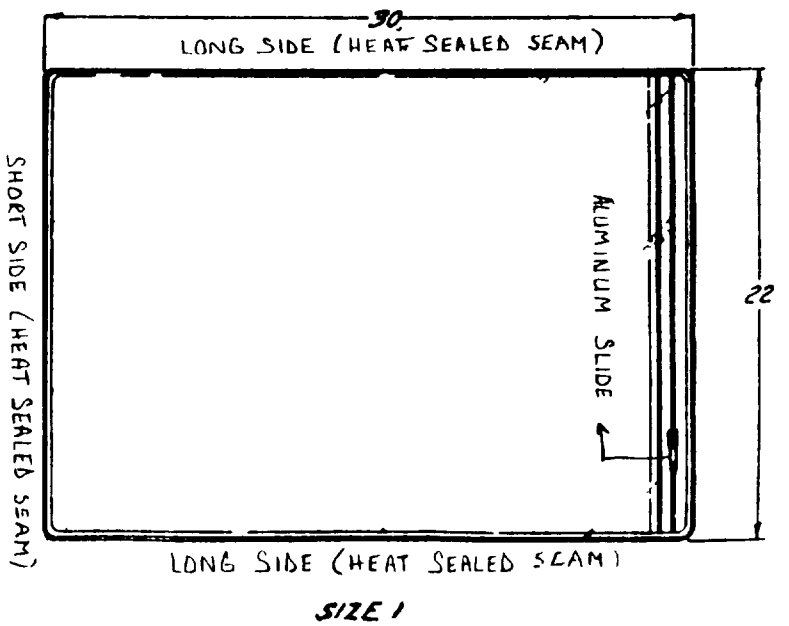


Figure 1 - Case, Map

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	A-A-55192	07 APRIL 1993

3. DOCUMENT TITLE
CASE, MAP

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6. SUBMITTER

a NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.