


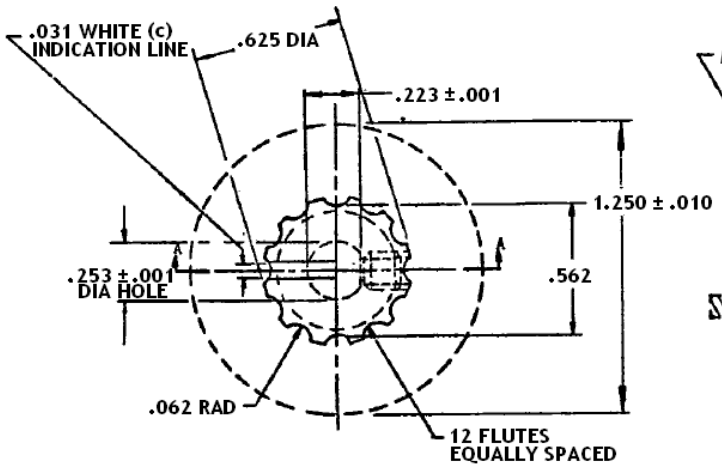


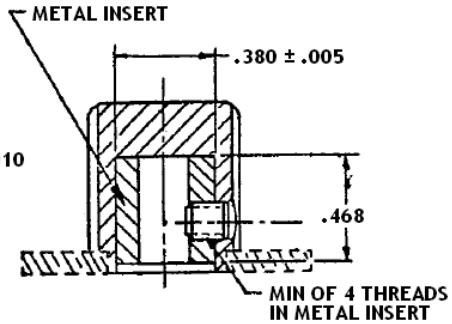

ALTERNATE
SECTION A-A
SHOWING PLASTIC KNOB
WITH METAL INSERT

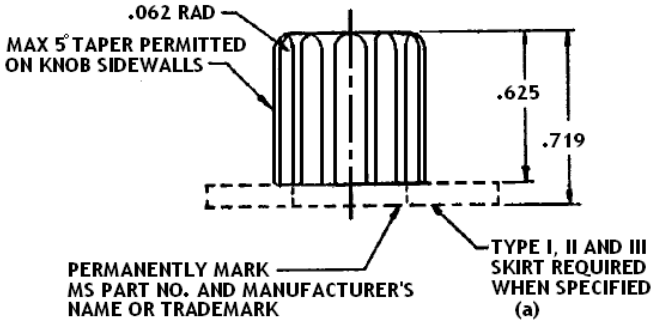

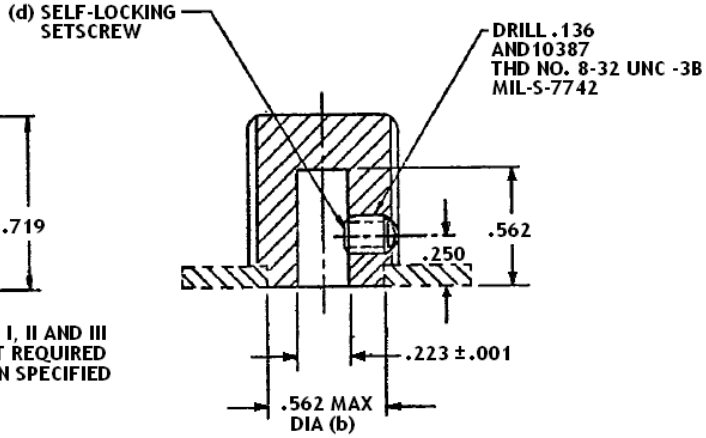

SECTION A-A
SHOWING ALL METAL KNOB

(d) DASH NUMBER	(a) KNOB FORM	MATERIAL
-1	WITHOUT SKIRT	METAL
P1	WITHOUT SKIRT	PLASTIC
-2	WITH TYPE I SKIRT	METAL
P2	WITH TYPE I SKIRT	PLASTIC
-3	WITH TYPE II SKIRT	METAL
P3	WITH TYPE II SKIRT	PLASTIC
-4	WITH TYPE III SKIRT	METAL
P4	WITH TYPE III SKIRT	PLASTIC

REFER TO SHEET 2 FOR GENERAL NOTES.

(F) FOR CHANGES SEE SHEET 2.

APPROVED 6 JUL 55 REVISED (A) 10 OCT 55 (B) 7 OCT 57 (C) 19 OCT 59 (D) 31 AUG 60 (E) 24 NOV 64 (F) 27 DEC 65

Reviewers:
Navy – WP
USAF – 11
DISC

This standard has been approved by the BuWeps (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - WP Other Cust. USAF -11	TITLE **KNOB, ROUND, SMALL**	**MILITARY STANDARD** **MS25167**(ASG)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

(a) FOR SKIRT TYPES SEE MS25164.
(b) DIAMETER DIMENSION OF KNOB WITHOUT SKIRT.
(c) POINTER INDICATION ON SKIRTS SHALL BE LOCATED OPPOSITE TO AND ON CENTERLINE OF KNOB SETSCREW. THE WHITE OF THE LINE SHALL BE A MAT WHITE WITH MATERIAL HAVING A REFLECTANCE OF NO LESS THAN 60 PERCENT. CONTRAST OF THE WHITE LINE AND GRAY OR BLACK COATING SHALL BE AS SPECIFIED IN MIL-P-7788.
SKIRT WHEN SPECIFIED, SHALL BE ASSEMBLED TO KNOB MECHANICAL OR ADHESIVE METHODS OR THE SKIRT AND KNOB SHALL BE FORMED IN ONE PIECE.
KNOB EDGES SHALL BE HONED TO AN APPROXIMATE RADIUS OF .03.
(d) SCREWS SELFLOCKING FEATURE IN ACCORDANCE WITH MIL-F-18240.

MATERIAL:
INSERT; BRASS, QQ-B-613, COMPOSITION B, HALF HARD.
KNOB AND SKIRT; CLEAR TRANSPARENT PLASTIC OR CORROSION RESISTANT METAL.
FINISH:
INSERT; CADMIUM PLATE, SPEC QQ-P-416, TYPE II CLASS A PERMITTED.
KNOB AND SKIRT: THE ENTIRE OUTER SURFACE, EXCEPT FOR THE BOTTOM SURFACE AND ANY REQUIRED INDEX MARKINGS SHALL BE COATED DARK GULL GRAY OR BLACK MAT MATERIAL HAVING A COLOR CONFORMING TO ONE OF THE COLOR NUMBERS IN ACCORDANCE WITH FED STD 595 SHOWN IN THE COLOR CODE TABLE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL ± .016.

ADD P IN PLACE OF DASH TO INDICATE PLASTIC KNOB.
ADD CODE LETTER TO INDICATE COLOR OF SKIRT AND KNOB AFTER DASH NUMBER DESIGNATING SKIRT TYPE.

(F)

CODE	COLOR		INDICATION LINE
	NAME	FED STD 595	
A	DARK GULL GRAY	36231	WITH INDICATION LINE
B	BLACK	37038	
E	DARK GULL GRAY KNOB WITH BLACK SKIRT	36231	WITH INDICATION LINE
		37038	
C	DARK GULL GRAY	36231	WITHOUT INDICATION LINE
D	BLACK	37038	
F	DARK GULL GRAY KNOB WITH BLACK SKIRT	36231	WITHOUT INDICATION LINE
		37038	

EXAMPLE OF PART NOS.:
MS25167-1A = METAL KNOB WITHOUT SKIRT, DARK GULL GRAY, WITH INDICATION LINE.
MS25167P4C = PLASTIC KNOB, TYPE III SKIRT, DARK GULL GRAY, WITHOUT INDICATION LINE.
MS25167P4E = PLASTIC KNOB, DARK GULL GRAY WITH TYPE III BLACK SKIRT, WITH INDICATION LINE.

(F)

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 JUL 55 REVISED (F) FOR CHANGES SEE SHEETS 1 AND 2

Reviewers:
Navy – WP
USAF – 11
DISC

This standard has been approved by the BuWeps (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - WP Other Cust. USAF -11	TITLE **KNOB, ROUND, SMALL**	**MILITARY STANDARD** **MS25167(ASG)**
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.