FED. SUP CLASS
5365

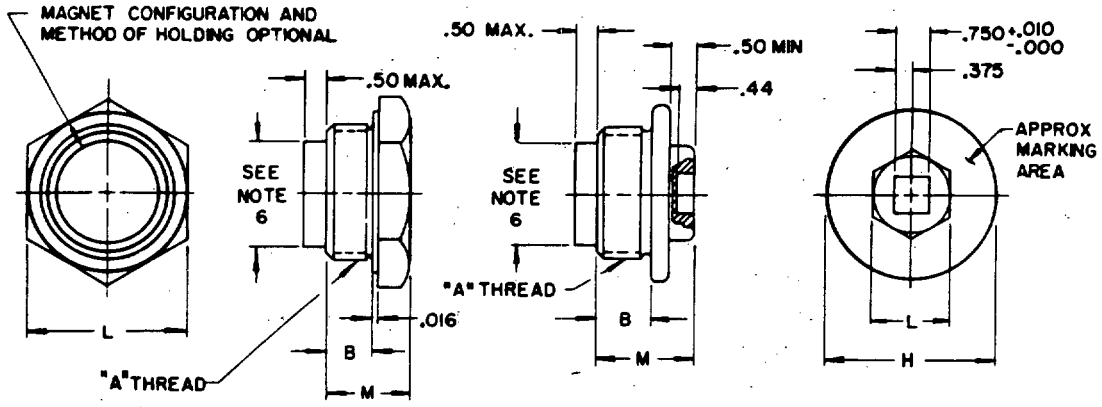


TABLE I

MS DASH NO. STEEL	MS DASH NO. ALUMINUM	"A" THREAD SIZE	B	L NOMINAL	M	GASKET MS 35769 DASH NO (SEE NOTE 4)
-1	-2	3/8-24 UNF-2A	.31	.625	.50	-6
-49	-50	1/2-20 UNF-2A	.34	.750	.53	-9
-3	-4	5/8-18 UNF-2A	.38	.875	.62	-11
-83	-84	3/4-16 UNF-2A	.38	1.000	.62	-15
-5	-6	7/8-14 UNF-2A	.41	1.125	.66	-18
-99	-100	7/8-18 UNS-2A	.41	1.125	.66	-18
-111	-112	1-18 UNS-2A	.44	1.250	.75	-21
-7	-8	1-1/4-12UNF-2A	.47	1.500	.78	-31
-133	-134	1-1/4-18UNEF-2A	.47	1.500	.78	-31
-149	-150	1-1/2-18UNEF-2A	.50	1.750	.88	-48

TABLE II

MS DASH NO. IRON	MS DASH NO. ALUMINUM	"A" THREAD SIZE	B	H FLANGE DIA.	L NOMINAL	M	GASKET MS 35769 DASH NO. (SEE NOTE 4)
-9	-10	2-12 UN-2A	.56	2.25	1.500	1.37	-55
-167	-168	2-16 UN-2A (D)	.56	2.25	1.500	1.37	-55
-11	-12	3-12 UN-2A	.56	3.25	1.500	1.37	-76

(D) DENOTES CHANGES

REVIEW ACTIVITIES: ARMY-ME, NAVY-MC; AF-99; DLA-

USER ACTIVITIES:

...itary standard is approved for use by all Departments and Agencies ... Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 16 JULY 1958 REVISED (A) 24 APRIL 1967 (B) 24 MAY 1968 (C) 15 NOV 1971 (D) 23 FEB 1978

P.A. ARMY-AT Other Cust NAVY-YD AF- 99	TITLE PLUG, MACHINE THREAD, MAGNETIC: DRAIN	MILITARY STANDARD MS35844
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5365-0027

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5365

(D) REQUIREMENTS:

1. MATERIAL:

   A. STEEL, CARBON, 1010 TO 1025, ASTM A-108 OR B1211 TO B1213, QQ-S-637.

   B. ALUMINUM ALLOY, 2011, TEMPER T-3, QQ-A-225/30

   C. CASTING, MALLEABLE IRON, GRADE 1, QQ-I-666.

   D. ALUMINUM ALLOY 2017-TEMPER T-4, 6161-TEMPER T-6, PER QQ-A-367.

   E. MAGNET, PERMANENT: ALNICO 5, OR CERAMIC SERIES OF MMPA-0100-66.

2. PROTECTIVE FINISH:

   A. ALUMINUM, ANODIZE, MIL-A-8625.
   B. STEEL AND MALLEABLE IRON, ZINC PLATE PER QQ-Z-325, TYPE II, CLASS 2, OR CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 2. CLASS 3, PERMISSIBLE, THREAD SIZES 1/2 INCH DIA AND UNDER.

3. SURFACE FINISH:
   ALL MACHINED SURFACES SHALL BE $\overset{125}{\vee}$; ALL UNMACHINED
   SURFACES 500 IN ACCORDANCE WITH ANSI B46.1.

4. GASKET MS35769 SHALL BE FURNISHED AS SPECIFIED.

5. DIMENSIONS AND FEATURES OTHER THAN AS SHOWN HEREIN SHALL BE IN ACCORDANCE WITH S.A.E. J532.

6. MAXIMUM DIAMETER OF THE MAGNET SHALL BE AT LEAST 0.100 INCH SMALLER THAN THE PITCH DIAMETER OF THE THREAD.

7. MAGNET SHALL LIFT A MINIMUM OF 6 OZ. SOFT STEEL WEIGHT AFTER INSERTED IN PLUG. MAGNET SHALL BE FIRMLY RETAINED IN PLUG AT TEMPERATURES UP TO 500°F.

8. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

9. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.010 ON MACHINED SURFACES. (D)

10. THE MS PART NUMBER SHALL CONSIST OF THE MS NUMBER PLUS A DASH NUMBER. EXAMPLE: MS3584L-1.

11. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

12. MINIMUM ACROSS CORNER DIMENSIONS OF HEXAGONS SHALL BE 1.092 TIMES THE NOMINAL WIDTH ACROSS FLATS OF THE HEXAGON.

(D) NOTES:

1. DIMENSIONS ARE IN INCHES.

2. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.

3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

5. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

APPROVED 16 JULY 1958 (D) FOR CHANGES SEE SHEETS 1 AND 2

Other Cust	TITLE PLUG, MACHINE THREAD, MAGNETIC: DRAIN	MILITARY STANDARD MS 35844
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/1170

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.