
FED SUP CLASS
5935

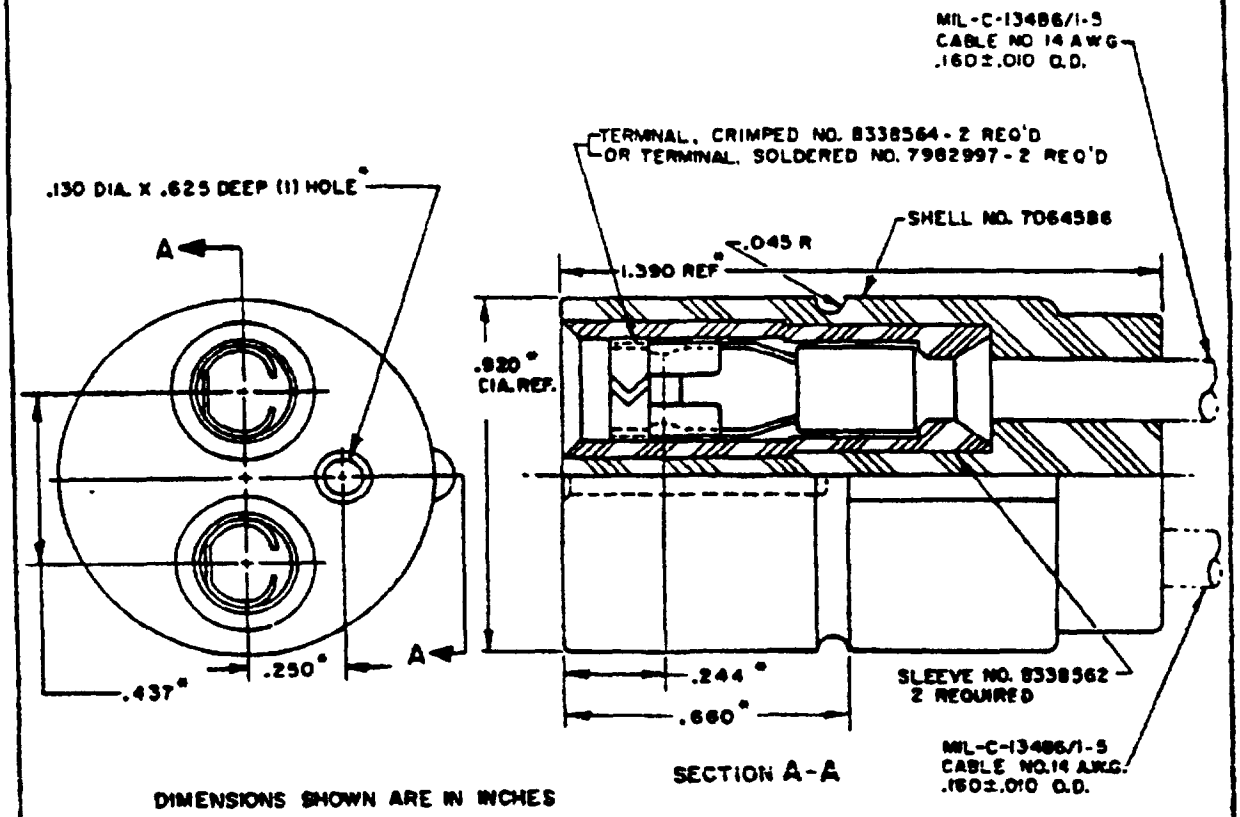

SECTION A-A

DIMENSIONS SHOWN ARE IN INCHES

(R) DENOTES CHANGE

MS PART NUMBER	ENGINEERING PARTS LIST
MS 27145-1	8589045

P.A. ARMY-AT Other Govt (I) NAVY	INTERNATIONAL INTEREST STANAG 4040	TITLE CONNECTOR, PLUG, ELECTRICAL: NO. 14 AWG. DOUBLE CONTACT, WATERPROOF	MILITARY STANDARD MS 27145
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

5935-3655-02

(R) USER ACTIVITIES NAVY-MC


(R) REVIEW ACTIVITIES ARMY-MI, ME
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.
AMSC N/A

(R) DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

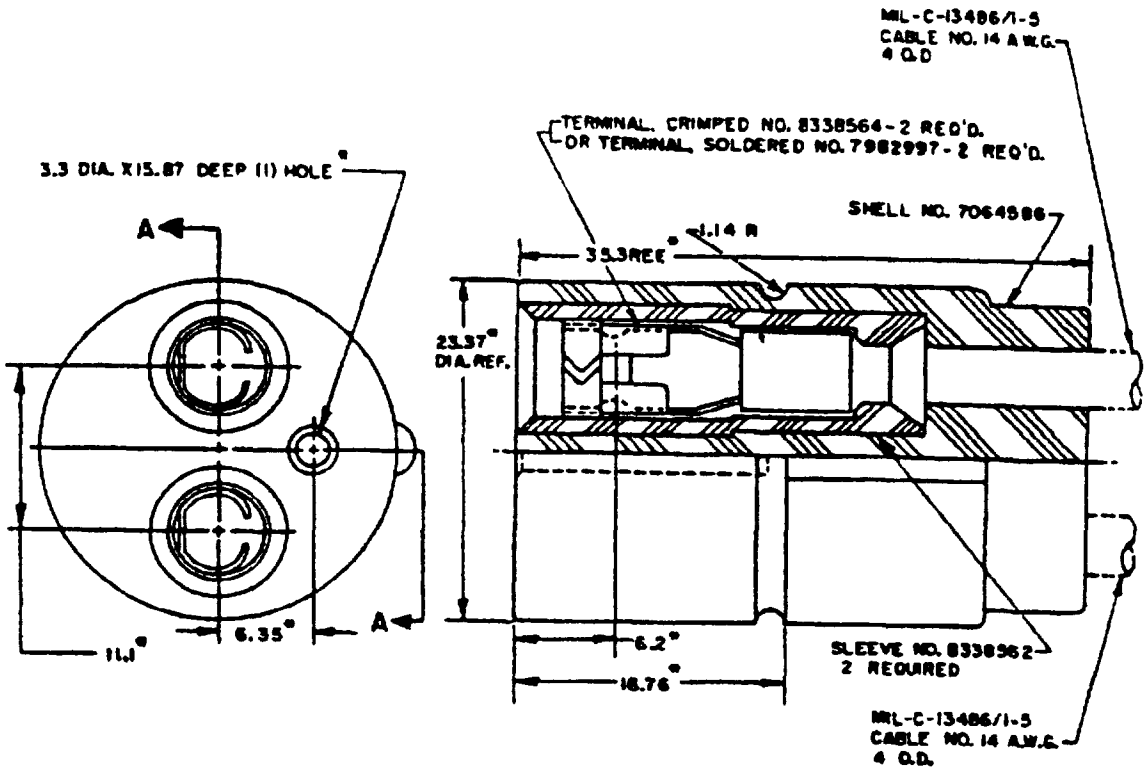

DIMENSIONS SHOWN ARE IN MILLIMETERS

SECTION A-A

MS PART NUMBER	ENGINEERING PARTS LIST
MS 27145-1	8689045

P.A. ARMY-AT Other Cust (1) NAVY	INTERNATIONAL INTEREST STANAG 4040	TITLE CONNECTOR, PLUG, ELECTRICAL: NO 14 A.W.G. DOUBLE CONTACT, WATERPROOF	MILITARY STANDARD MS 27145
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 2 OF 3

DD FORM 672-1 (COORDINATED)

(1) For changes see pages 1, 2 and 3

APPROVED 11 MAY 1981 REVISED (1)

USER ACTIVITIES

RESPONSIBLE ACTIVITIES

AMSC N/A

(5) This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

(6) DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

USER ACTIVITIES

REVIEW ACTIVITIES

NOTES

1 MATERIAL
(D) SHELL RUBBER-GRADE SC 615 A_1 C_1 E_3 F_2, ASTM-D-2000
TERMINAL BRASS-COMPOSITION 11 OR 22, TEMPER HALFHARD MINIMUM, QQ-B-626

2 PROTECTIVE FINISH
TERMINAL SILVER PLATE, TYPE II, GRADE A, .0002 MIN THICKNESS, QQ-S-365

3 FOR MATING CONNECTOR SEE MS27146

4 WHEN CONNECTORS ARE COUPLED, VOLTAGE DROP SHALL NOT EXCEED 20 MILLIVOLTS WHEN TESTED IN A 28 VOLT CIRCUIT AS OUTLINED IN MIL-STD-202, METHOD 307

5. WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE 1000 VOLT DIELECTRIC STRENGTH TEST REQUIREMENTS OUTLINED IN MIL-STD-202, METHOD 302

6. WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE REQUIREMENTS FOR WATERPROOFNESS OUTLINED IN MIL-STD-202, METHOD 107.

7 WHEN CONNECTORS ARE COUPLED, THE ASSEMBLY SHALL MEET THE REQUIREMENTS OF SALT SPRAY CORROSION TEST OUTLINED IN MIL-STD-202, METHOD 101 (5% SALINE AT 200 HRS)

(D) 8 TERMINAL NUMBER 8338564 TO BE CRIMPED TO CABLE, TERMINAL NUMBER 7982997 TO BE SOLDERED TO CABLE WITH SOLDER COMPOSITION SN-50 OR SN-60, QQ-S-571 AS OUTLINED IN DOD-STD-1866 ASSEMBLY MUST WITHSTAND A PULL TEST OF 60 POUNDS (27 KILOGRAMS)

(D) 9 FORCE REQUIRED TO UNCOUPLED CONNECTORS SHALL NOT EXCEED 50% OF VALUES EXPRESSED IN NOTE 8 WHEN AT EITHER TEMPERATURE EXTREME OF TABLE D, MIL-STD-202, METHOD 107

10 DETAILS OF THIS ASSEMBLY SHALL BE IN ACCORDANCE WITH ENGINEERING PARTS LIST, WHICH MAY BE OBTAINED FROM U.S. ARMY TANK AUTOMOTIVE COMMAND, WARREN, MICHIGAN 48397-5000.

(D) 11 RECYCLED, VIRGIN AND RECLAIMED MATERIALS THERE ARE NO REQUIREMENTS FOR THE EXCLUSIVE USE OF VIRGIN MATERIALS, HOWEVER, ALL MATERIALS SHALL BE NEW AND UNUSED THE USE OF RECYCLED OR RECLAIMED (RECOVERED) MATERIALS IS ACCEPTABLE PROVIDED THAT ALL OTHER REQUIREMENTS OF THIS STANDARD ARE MET

CERTAIN PROVISIONS OF THIS STANDARD (IDENTIFIED BY *) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4040 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED

MS PART NUMBER	ENGINEERING PARTS LIST
MS 27145-1	8689045

P A ARMY-AT Other Cust (D) NAVY	INTERNATIONAL INTEREST STANAG 4040	TITLE CONNECTOR, PLUG, ELECTRICAL: NO 14 AWG. DOUBLE CONTACT, WATERPROOF	MILITARY STANDARD MS 27145
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 3 OF 3

AMSC N/A

(D) DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

(D) This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.