
FED. SUP CLASS
5935

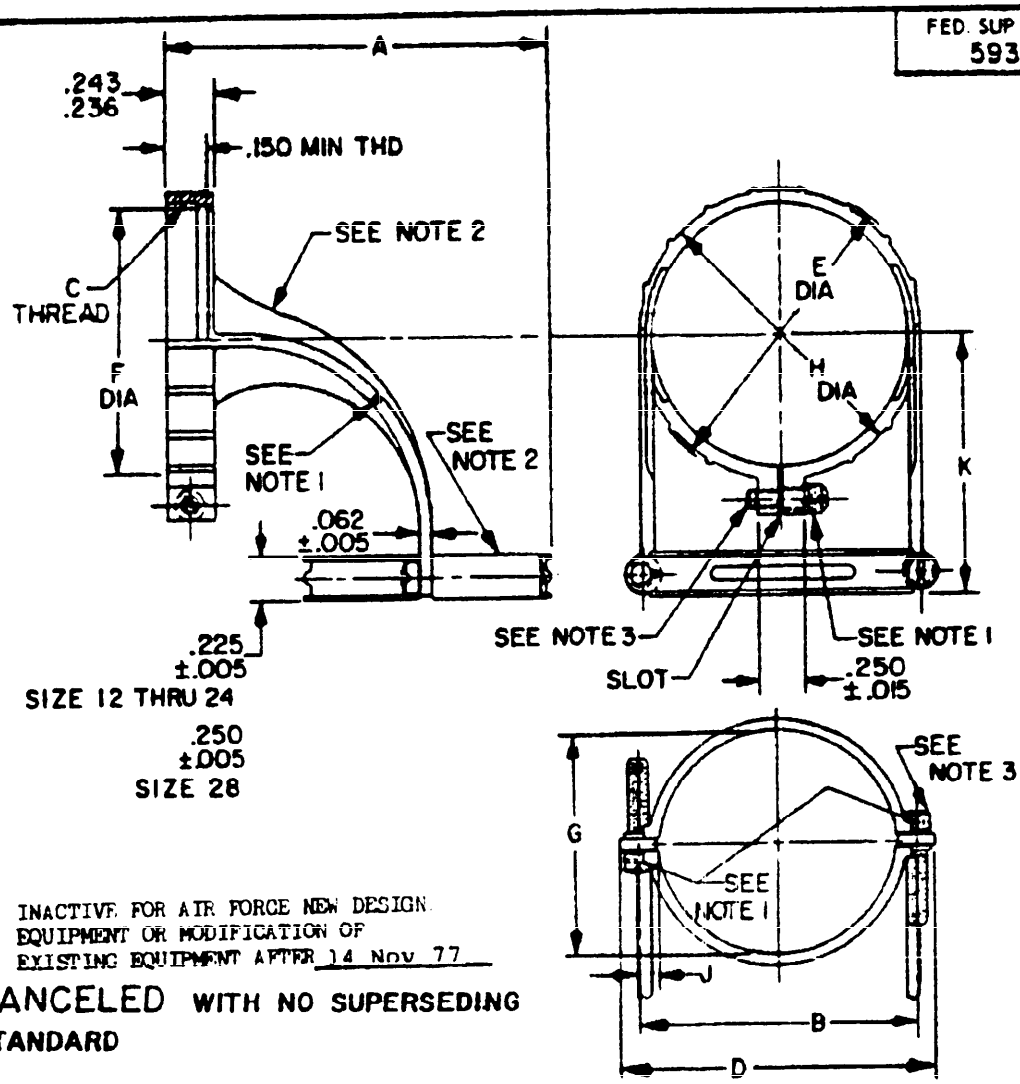

INACTIVE FOR AIR FORCE NEW DESIGN
EQUIPMENT OR MODIFICATION OF
EXISTING EQUIPMENT AFTER 14 Nov 77

© CANCELED WITH NO SUPERSEDING STANDARD

Military part number	Shell size	A max.	B ±.010	C nom. -36NS-2B	D ±.015	E ±.010	F ±.010	G ±.015	H ±.015	J ±.010	K max.
MS27659-12	12	1.298	.677	.7334	.863	.768	.643	.435	.768	.094	.950
MS27659-14	14	1.388	.748	.8032	.934	.862	.717	.504	.842	.094	1.010
MS27659-16	16	1.523	.923	.9302	1.109	.989	.844	.686	.969	.115	1.070
MS27659-18	18	1.622	1.039	1.0362	1.225	1.095	.950	.794	1.075	.118	1.130
MS27659-22	22	1.878	1.298	1.2862	1.484	1.345	1.200	1.038	1.325	.126	1.260
MS27659-24	24	2.000	1.427	1.4111	1.613	1.595	1.325	1.162	1.575	.128	1.320
MS27659-28	28	2.250	1.658	1.6611	1.844	1.845	1.575	1.412	1.825	.126	1.440

NOTES:
1. .037 ±.005 DIA safety wire hole in body and screws.
2. Material: Cable clamp - passivated stainless steel.
   Clamp sector - passivated 300 series stainless steel.
3. Screw; No. 4-40 fillister head machine, stainless steel.
4. All dimensions are in inches and are after plating.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.
6. For design feature purposes this standard takes precedence over procurement documents referenced herein.

P.A. AF - 85 Other Cust	International Interest	TITLE 90° SUPPORT, CABLE, ELECTRICAL CONNECTOR (FOR CLASS E AND K CONNECTORS)	MILITARY STANDARD MS 27659 (USAF)
Procurement Specification MIL-C-26500		SUPERSEDES:	PAGE 1 OF 1

AMSC N/A

5935 - F319-07

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

APPROVED 15 Nov 71 REVISED (A) 12 MAR 73 (B) 14 Nov 77 (C) 17 FEB 88

Reviewer activities: AF - 11, 17, 99
DLA - ES

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOJE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:47Z
Check the source to verify that this is the current version before use.