PPP-P-700C
October 10, 1974
SUPERSEDING
Fed. Spec. PPP-P-700B
February 6, 1970

FEDERAL SPECIFICATION

PROTECTOR, PACKING LIST

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers opaque packing list protectors.

1.2 Classification. Protectors shall be of the following legends and sizes as specified (see 6.2 and figure 1).

Legend A - Packing List

Size 1
Size 2
Size 3
Size 4
Size 5

Legend B - Material Release/Receipt Documents

Size 1
Size 4

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-F-320	-	Fiberboard, Corrogated and Solid Sheet Stock (Container Grade) and Cut Shapes

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the current version before use.

Federal Standard:

FED-STD-123 - Marking for Domestic Shipment (Civil agencies)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116 - Preservation-Packaging, Method of
MIL-B-3106 - Board, Composition, Water-Resistant, Solid (For Filler of Cushioning Pads)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Material. The protector shall be formed from water-resistant composition board conforming to the material requirements for type II of MIL-B-3106 or from material conforming to type SF, class weather resistant, grade W5s of PPP-F-320.

3.2 Design. The protector shall be rectangular with rounded corners and shall be indented or recessed as shown in figure 1.

3.3 Legend. Legend on the protectors shall be either Packing List or Material Release/Receipt Documents as specified (see 1.2 and 6.2). The legend shall be embossed and of dimensions shown on figure 1.

3.4 Dimensions and sizes. Protector sizes shall be overall outside measurements. Dimensions shall be as shown on figure 1. Dimensions with no tolerance (see figure 1) shall be provided a ± 1/16 inch tolerance.

3.5 Workmanship. The protectors shall be clean, free from pin holes, tears, cuts, sharp creases, wrinkles, and shall not stick together. The embossing shall be legible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:50Z
Check the source to verify that this is the currentversion before use.

all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3 Inspection of the end item.

4.3.1 Examination of the end item. Examination of the end item shall be made in accordance with the classification of defects, inspection levels and acceptable quality levels (AQLs), expressed as defects per 100 units, specified in 4.3.1.5. The lot size, for the purpose of determining the sample size in accordance with MIL-STD-105, shall be expressed in units of protectors for examination in 4.3.1.1 and 4.3.1.2. For examination in 4.3.1.3 the lot size shall be expressed in units of unit packages. For examination in 4.3.1.4 the lot size shall be expressed in units of shipping containers.

4.3.1.1 Examination of the end item for defect in material, construction, appearance and workmanship. The sample unit for this examination shall be one protector. Not more than ten sample units shall be selected from any one unit package.

Examine	Defect
Material	Not type of composition board specified.
Construction, appearance and workmanship	Any design or construction feature not as specified. Edge of recess not uniform and parallel with outer edge of flange. Not marked or embossed as specified; marking or embossing as applicable not correct, distinct and legible in detail. Any hole, including pin holes, tear, cut, sharp crease, wrinkle, scuffed surface, crushed recess; or other defect which affects appearance or serviceability. Edge not cut completely; ragged or crushed edge. Protectors stick together to an extent that separation cause damage. Not clean.

4.3.1.2 Examination of the end item for dimensional defects. The sample unit for this examination shall be one protector. Any dimension or radius not within the tolerances specified (see figure 1) shall be scored as a defect.

4.3.1.3 Examination of the end item for count per unit package. The sample unit for this examination shall be one unit package of protectors. The average count per package shall be not less than the specified or indicated quantity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

4.3.1.4 Examination of preparation for delivery. An examination shall be made to determine whether packaging, packing, and marking comply with the requirements of section 5 of this specification. The sample unit shall be one shipping container packed and selected just prior to the closing operation. Shipping containers fully prepared for delivery shall be examined for closure defects.

Examine	Defect
Material	Any packaging or packing component or material not as specified. Any component missing or malformed.
Packaging	Unit package not uniform, secure and providing protection as specified (see MIL-P-116). No intermediate package. Quantity not as specified. Box grade less than specified.
Packing	Quantity not as specified.
Workmanship	Bulge or distortion of shipping container. Broken, crushed or otherwise damaged shipping container in a manner which may result in loss or injury to the contents.
Marking (unit packages, intermediate, and shipping containers)	Omitted; incomplete; incorrect; illegible; of improper size, location, sequence or method of application.
Weight	Gross weight in excess of maximum specified.

4.3.1.4.1 Examination of closure, waterproofing and banding of containers. When shipping containers are required to comply with PPP-B-636, examination for defects in closure, waterproofing and banding shall be in accordance with the appendix of that specification.

4.3.1.5 Inspection levels and acceptable quality levels (AQLs) for examination. The inspection levels for the purpose of determining the sample size and acceptable quality levles (AQLs) expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the currentversion before use.

Examination paragraph	Inspection levels	AQL
4.3.1.1	S-4	4.0
4.3.1.2	S-2	4.0
4.3.1.3	S-2	--
4.3.1.4	S-2	2.5

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit package. One hundred protectors of one size and legend shall be packaged in accordance with method III, of MIL-P-116.

5.1.1.2 Intermediate package. Four unit packages (400) protectors of one size and legend shall be packaged in a snug-fitting fiberboard box conforming to type CF variety SW class domestic minimum grade 200 of PPP-B-636. Closure shall be method 1 of the appendix of PPP-B-636.

5.1.2 Level B. One hundred (100) protectors of one size and legend shall be wrapped with paper or plastic film or packaged in paperboard box and secured to prevent accidental opening.

5.1.3 Level C. Protectors shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The packages and quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Unless otherwise specified (see 6.2), three thousand two hundred protectors of one size, packaged as specified in 5.1.1 shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC grade V2s of PPP-B-636. Each shipping container shall be closed, waterproofed and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Unless otherwise specified in 5.2.2.1 four hundred protectors packaged as specified in 5.1.1.2 shall require no overpacking.

5.2.2.1 When specified (see 6.2), packing shall be as specified in 5.2.1 except that the shipping container shall conform to V3c, V3s or V4s of PPP-B-636 and the closure shall be method II of the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Protectors, packaged as specified in 5.1.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agency requirements. In addition to any special marking required by the procurement documents, marking of the interior packages and exterior shipping containers shall be in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior and exterior containers shall be marked in accordance with MIL-STD-129.


6. NOTES

6.1 Intended use. Packing list protectors are used to cover and protect packing list envelopes from loss, physical damage through materials handling or damage by adverse weather conditions.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Size required (see 1.2 and 3.4).
(c) Legend (markings) and overall dimensions required (see 1.2 and 3.3).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) Quantity required if other than specified (see 5.2.1).
(f) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(g) Marking requirements (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.

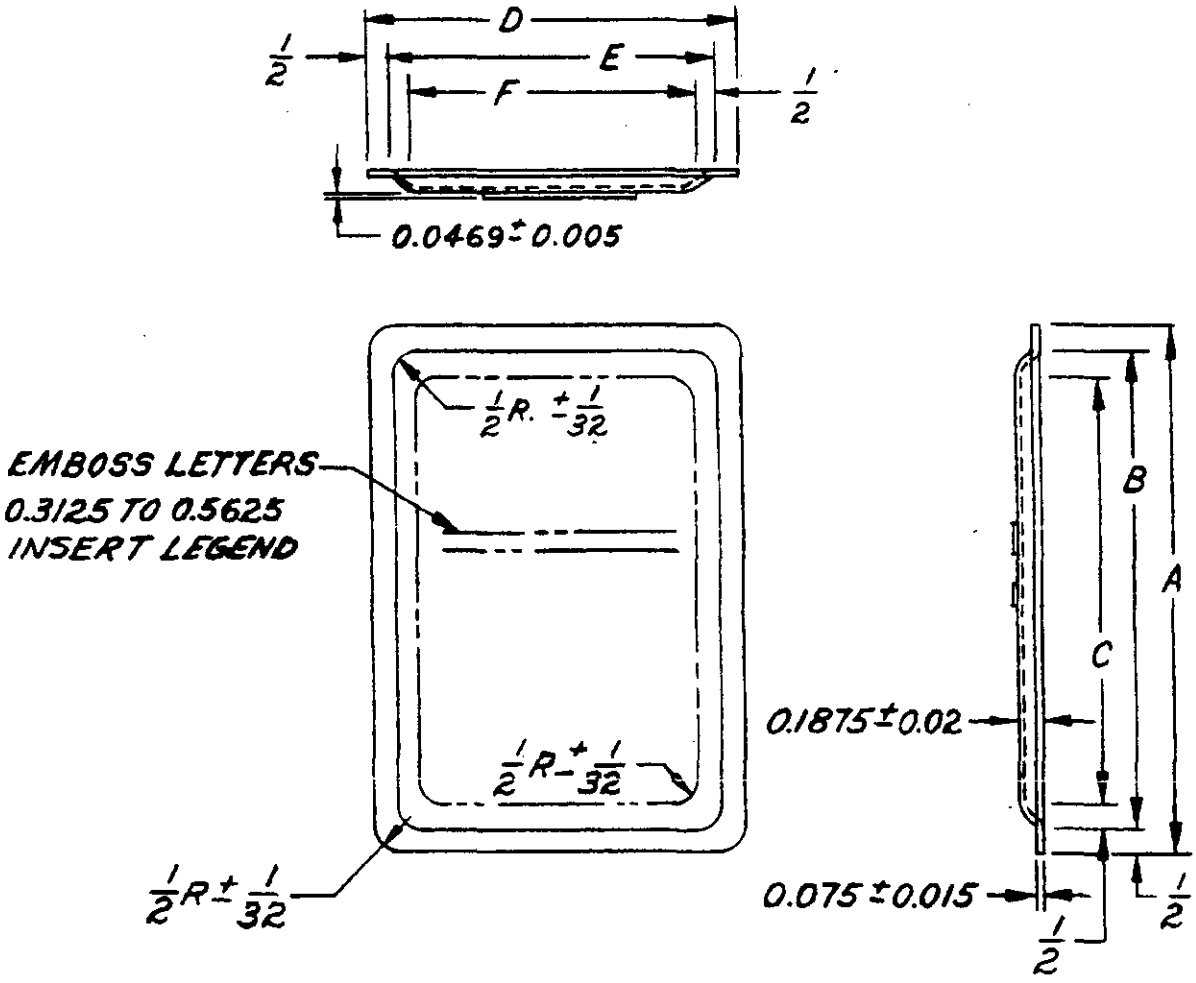

SIZE DESIGNATION	DIMENSIONS IN INCHES ± 1/16	A	B	C	D	E	F
1	8×11	11	10	9	8	7	6
2	8 1/4" × 10 1/2"	10 1/2	9 1/2	8 1/2	8 1/4	7 1/4	6 1/4
3	7 1/2 × 9	9	8	7	7 1/2	6 1/2	5 1/2
4	5 3/4 × 7	7	6	5	5 3/4	4 3/4	3 3/4
5	4 1/2 × 5 1/4	5 1/4	4 1/4	3 1/4	4 1/2	3 1/2	2 1/2

FIGURE 1, PROTECTOR, PACKING LIST
10-1-508

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Review activities:

Army - MU, SM
Air Force - 70, 71, 81, 82,84

User activities:

Army - EL, ME
Navy - OS, SH, MC, AS, YD

Preparing activity:

Army - GL

Civil Agency Coordinating Activity:

GSA-FSS

Project No. 8105-0215

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an *envelope addressed to preparing activity.*

DOCUMENT IDENTIFIER AND TITLE

Protector, Packing List PPP-P-700C

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:50Z
Check the source to verify that this is the current version before use.