METRIC

DOD-W-70336/1
w/Amendment 1
8 April 2005


MILITARY SPECIFICATION SHEET

WASHER, LOCK SPRING, HELICAL, REGULAR SERIES (METRIC)

Inactive for new design after 1 October 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for aquiring the product described herein shall consist of this specification sheet and DOD-W-70336.

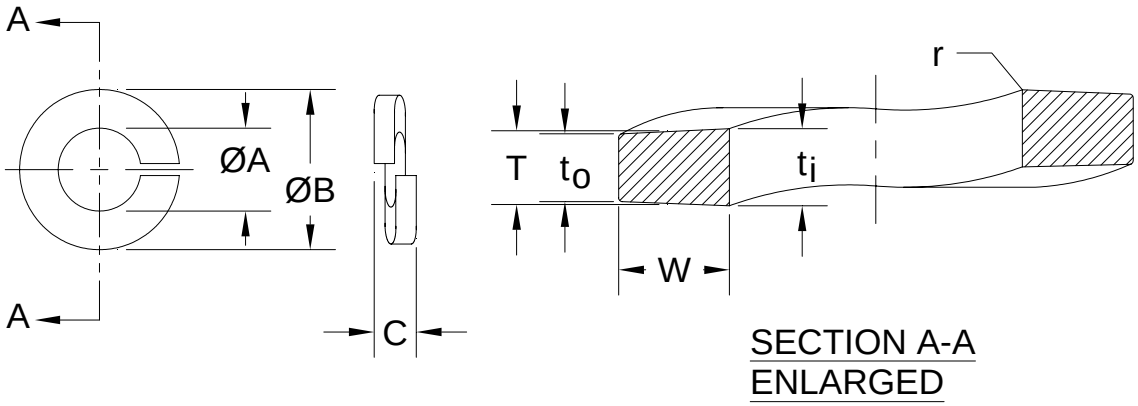

NOTES:

1. All dimensions are in millimeters, see Table I for dash numbers and dimensions.
2. $T = \frac{t_o + t_i}{2}$

FIGURE 1. WASHER, LOCK SPRING, HELICAL, REGULAR SERIES (METRIC).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS::

1. Material. Carbon steel,1050 thru 1095 (UNS G10500 thru UNS G10950, or austenitic corrosion resistant steel (CRES), 300 Series, non-magnetic


2. Surface hardness. Carbon Steel washers shall have a hardness of 45-52 HRC. Austenitic (CRES) washers shall have a hardness of 35-43 HRC.

3. Protective coating and surface treatment. Carbon steel washers shall be cadmium plated in accordance with SAE-AMS-QQ-P-416, Type II, Class 2. CRES washers shall be passivated in accordance with ASTM A380, or black oxide coated in accordance with MIL-DTL-13924.

4. remove all burrs and sharp edges.

5. Part number. The part number consists of the letter “D” the basic number of this specification sheet, the finish code letter, and a dash number taken fromTable I.

EXAMPLE: D70336/1 – 01

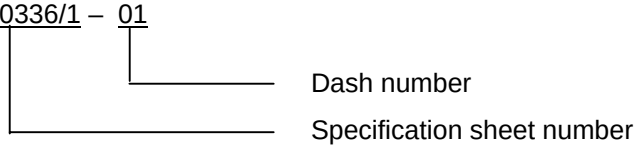

D70336/1-01 Indicates - Washer, Helical Spring, Carbon Steel; Cadmium Plated; 2 mm ID; 4.4 mm OD; .5 mm thick, Metric.

6 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.

TABLE 1. DASH NUMBERS AND DIMENSIONS.

NOM SIZE	DASH NO.			∅A ID		∅B OD	T THICKNESS $\frac{t_o + t_i}{2}$		C FREE HEIGHT (REFERENCE) (APPROX. 2T)	W WIDTH		R CORNER RADIUS APPROX.
	CARBON STEEL CAD PLATED	CRES 300										
		UNCOATED	BLACK OXIDE	MIN	MAX	MAX	MIN	MAX		MIN	MAX	
2	01	16	31	2.1	2.4	4.4	.4	.6	1.0	.8	1.0	.1
2.5	02	17	32	2.6	2.9	5.1	.5	.7	1.2	.9	1.1	.1
3	03	18	33	3.1	3.4	6.2	.7	.9	1.6	1.2	1.4	.2
3.5	04	19	34	3.6	3.9	6.7	.7	.9	1.6	1.2	1.4	.2
4	05	20	35	4.1	4.4	7.6	.8	1.0	1.8	1.4	1.6	.2
5	06	21	36	5.1	5.4	9.2	1.1	1.3	2.4	1.7	1.9	.2
6	07	22	37	6.1	6.5	11.8	1.5	1.7	3.2	2.35	2.65	.3
8	09	24	39	8.1	8.5	14.8	1.9	2.1	4	2.85	3.15	.5
10	10	25	40	10.2	10.7	18.1	2.2	2.35	4.4	3.3	3.7	.5
12	11	26	41	12.2	12.7	21.1	2.35	2.65	5	3.8	4.2	1.0
14	12	27	42	14.2	14.7	24.1	2.85	3.15	6	4.3	4.7	1.0
16	13	28	43	16.2	17.0	27.4	3.3	3.7	7	4.8	5.2	1.0
18	14	29	44	18.2	19.0	29.4	3.3	3.7	7	4.8	5.2	1.0
20	15	30	45	20.2	21.2	33.6	3.8	4.2	8	5.8	6.2	1.0

Custodians:
Army – AT
Navy – OS
Air Force - 99

Preparing Activity:
DLA- IS

Review Activities:
Army – AV, CR, CR4, MI
Navy – MC, SH
Air Force - 71

(Project 5310-2716)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:23Z
Check the source to verify that this is the current version before use.