INCH-POUND
MIL-PRF-55182/9F
AMENDMENT 3
14 February 2002
SUPERSEDING
AMENDMENT 2
14 June 2001

PERFORMANCE SPECIFICATION

RESISTORS, FIXED, FILM, NONESTABLISHED RELIABILITY,
ESTABLISHED RELIABILITY, AND SPACE LEVEL, STYLE RNC90

This amendment forms a part of MIL-PRF-55182/9F, dated 9 June 97, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

* 1.2.1.2, delete and substitute:

"1.2.1.2 Characteristic. Style RNC 90 is available in characteristics T, S, Y, and Z. The characteristics are identified as follows:

T and Y	-	Nonhermetically sealed	-	Resistance temperature characteristic (referenced to +25°C) = ±5.0 ppm/°C up to and including +125°C; and ±10.0 ppm/°C from +125°C to +175°C. 300 volts maximum working voltage.
S and Z	-	Nonhermetically sealed	-	Resistance temperature characteristic (referenced to +25°C) = ±2.0 ppm/°C up to and including +125°C; and ±2.0 ppm/°C from +125°C to +175°C. 300 volts maximum working voltage.

"

* Add 1.2.1.2.1:

"1.2.1.2.1 Terminal spacing. The terminal spacing is in accordance with table I-1.

TABLE I-1. Terminal spacing.

Characteristic	Configuration
Y and Z	A
T and S	B

"

PAGE 3

3.5, delete and substitute.


"3.5 Voltage rating. The maximum continuous working voltage shall not exceed 300 volts."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

Delete figure 1 in its entirety and substitute new figure 1 below:

"

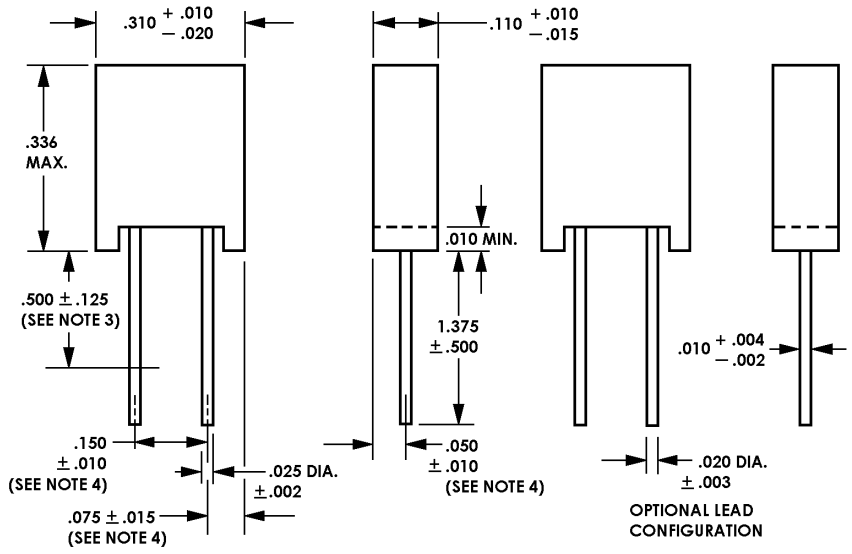

Configuration A

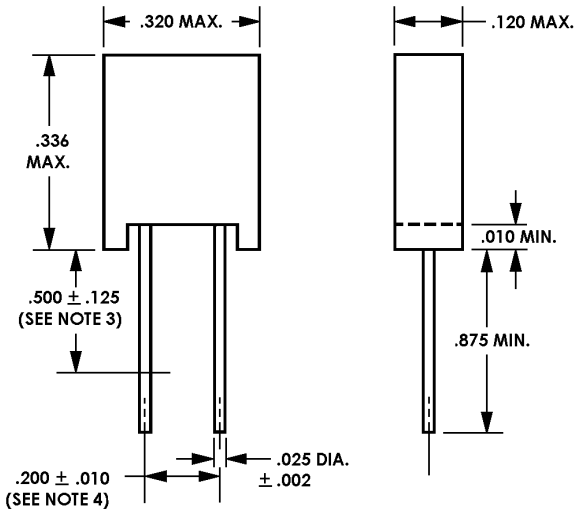

Configuration B

Inches	mm	Inches	mm
.002	0.05	.120	3.05
.003	0.08	.125	3.17
.004	0.10	.150	3.81
.010	0.25	.200	5.08
.015	0.38	.310	7.87
.020	0.51	.320	8.13
.025	0.63	.336	8.53
.050	1.27	.500	12.70
.075	1.90	.875	22.23
.110	2.79	1.375	34.92

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Resistance measurement point
4. The lead measurements shall be made at the point of emergence for the body.
5. Style of standoffs optional

FIGURE 1. Style RNC90 resistor. 2/

2/ Reference footnote 1/. "

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA

Review activities:
Army - AR
Navy - AS, CG, MC, OS
Air Force - 19, 99
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA-CC

(Project 5905-1652)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.