MILITARY SPECIFICATION

VOLTAGE CONVERTER: 9360839

This amendment forms a part of Military Specification MIL-V-70579B (AR), dated 27 August 1990, and is approved for use by the U.S. Army Armament, Munitions, and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Add the following:

MIL-STD-462 Electromagnetic Interference Characteristics, Measurement of

PAGE 4

Add the following paragraph:

3.3.6 Electromagnetic Interference. The voltage converter assembly shall comply with the following class 3A requirements of MIL-STD-461:

CE03 on 28 Volt Input Power Leads
CS06 on 28 Volt Input Power Leads
RE02
RS03

The voltage converter assembly shall introduce no intrasystem electromagnetic incompatibilities.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:43Z
Check the source to verify that this is the current version before use.

PAGE 12

Change from:

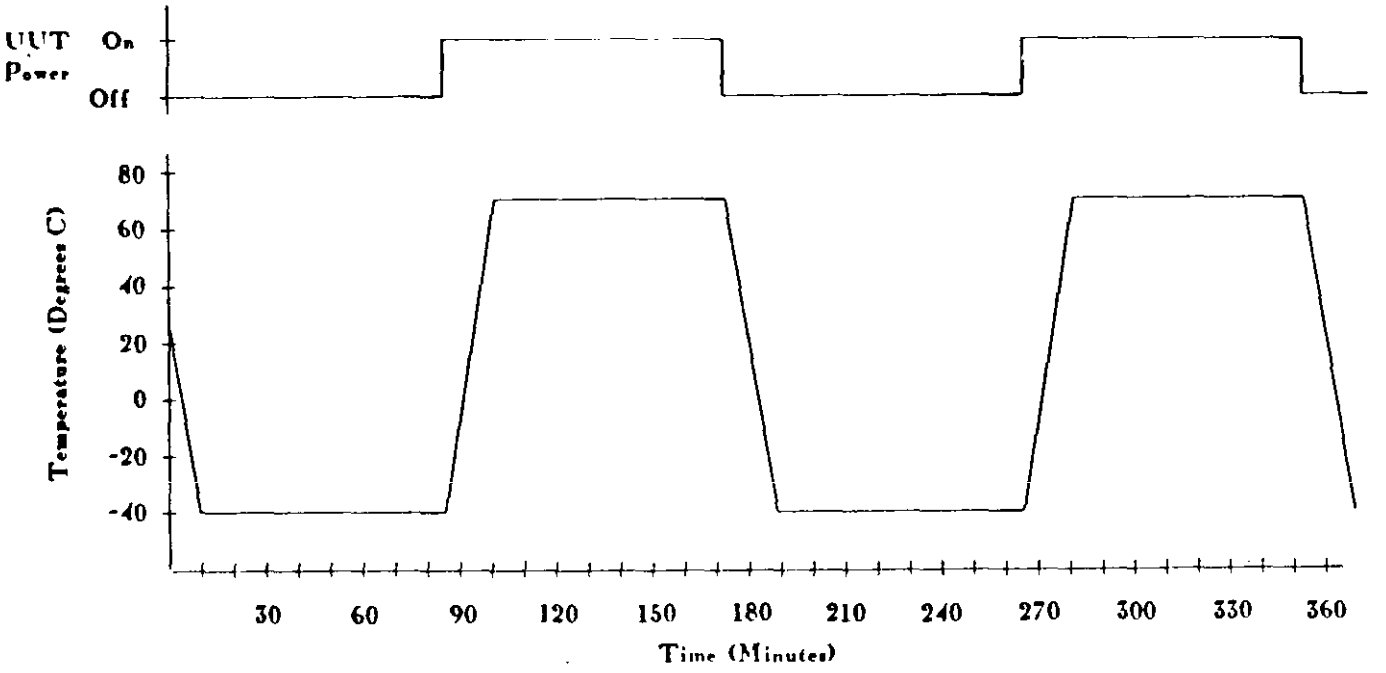


Figure 1. Burn-in Temperature Versus Time Diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:43Z
Check the source to verify that this is the current version before use.

To:

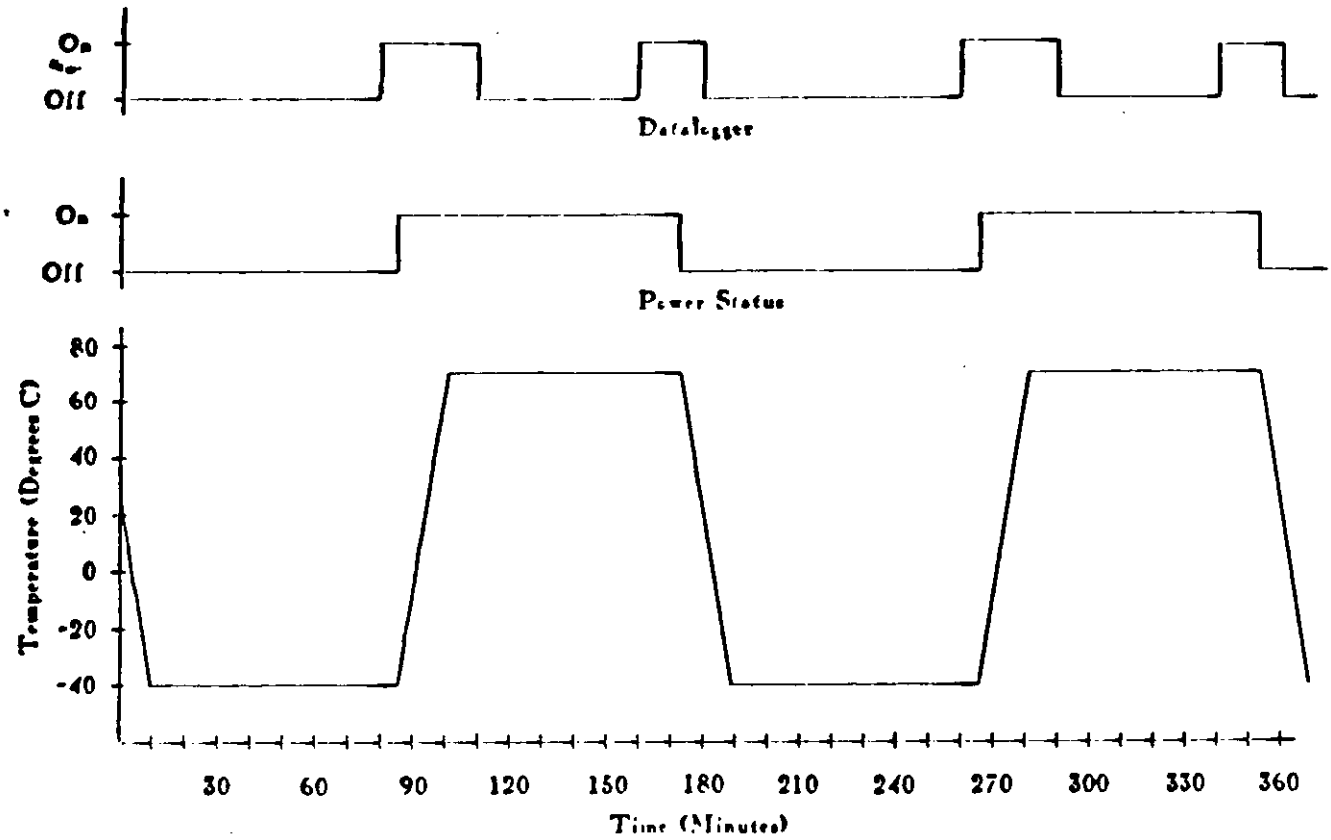


Figure 1. Burn-in Temperature Versus Time Diagram

PAGE 16

Add the following paragraph:

4.7.1.6 Electromagnetic Interference. The EMI requirements of 3.3.6 shall be tested in accordance with the requirements of MIL-STD-462. Compatibility testing, when applicable, shall be in accordance with the provisions of MIL-E-6051.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A725)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:43Z
Check the source to verify that this is the current version before use.