INCH-POUND

MIL-A-63242A(AR)
AMENDMENT 4
28 June 1994
SUPERSEDING
AMENDMENT 3
14 November 1988

MILITARY SPECIFICATION

AMPLIFIER, OPERATIONAL
TRIPLE PROGRAMMABLE MICROPOWER

This Amendment forms a part of Military Specification MIL-A-633242A(AR), dated 31 March 1982, and is approved for use by the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.1, Second line down: Delete the word "monolithic" and substitute "Class B, monolithic".

PAGE 4

3.2.1: Delete temperature "+60°C" and substitute "+65°C".

3.2.2, Second line down: Delete the word "reqwirements" and substitute "requirements".

FIGURE 1: Delete in its entirety and substitute new FIGURE 1 included.

PAGE 6

TABLE I. ELECTRICAL CHARACTERISTICS: Under PARAMETER, delete "-40°C T_A +60°C" and substitute "-40°C T_A +65°C".

3.4, Second line down: Delete "Table II except... capping." and substitute "MIL-STD-883, Method 5004, Class B (See TABLE II)."

3.6: Delete paragraph in its entirety and substitute the following paragraph:

"3.6 Qualification and acceptance tests.

3.6.1 Qualification. Component qualification testing shall comply with drawing 9317646 and requirements described in TABLE III.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

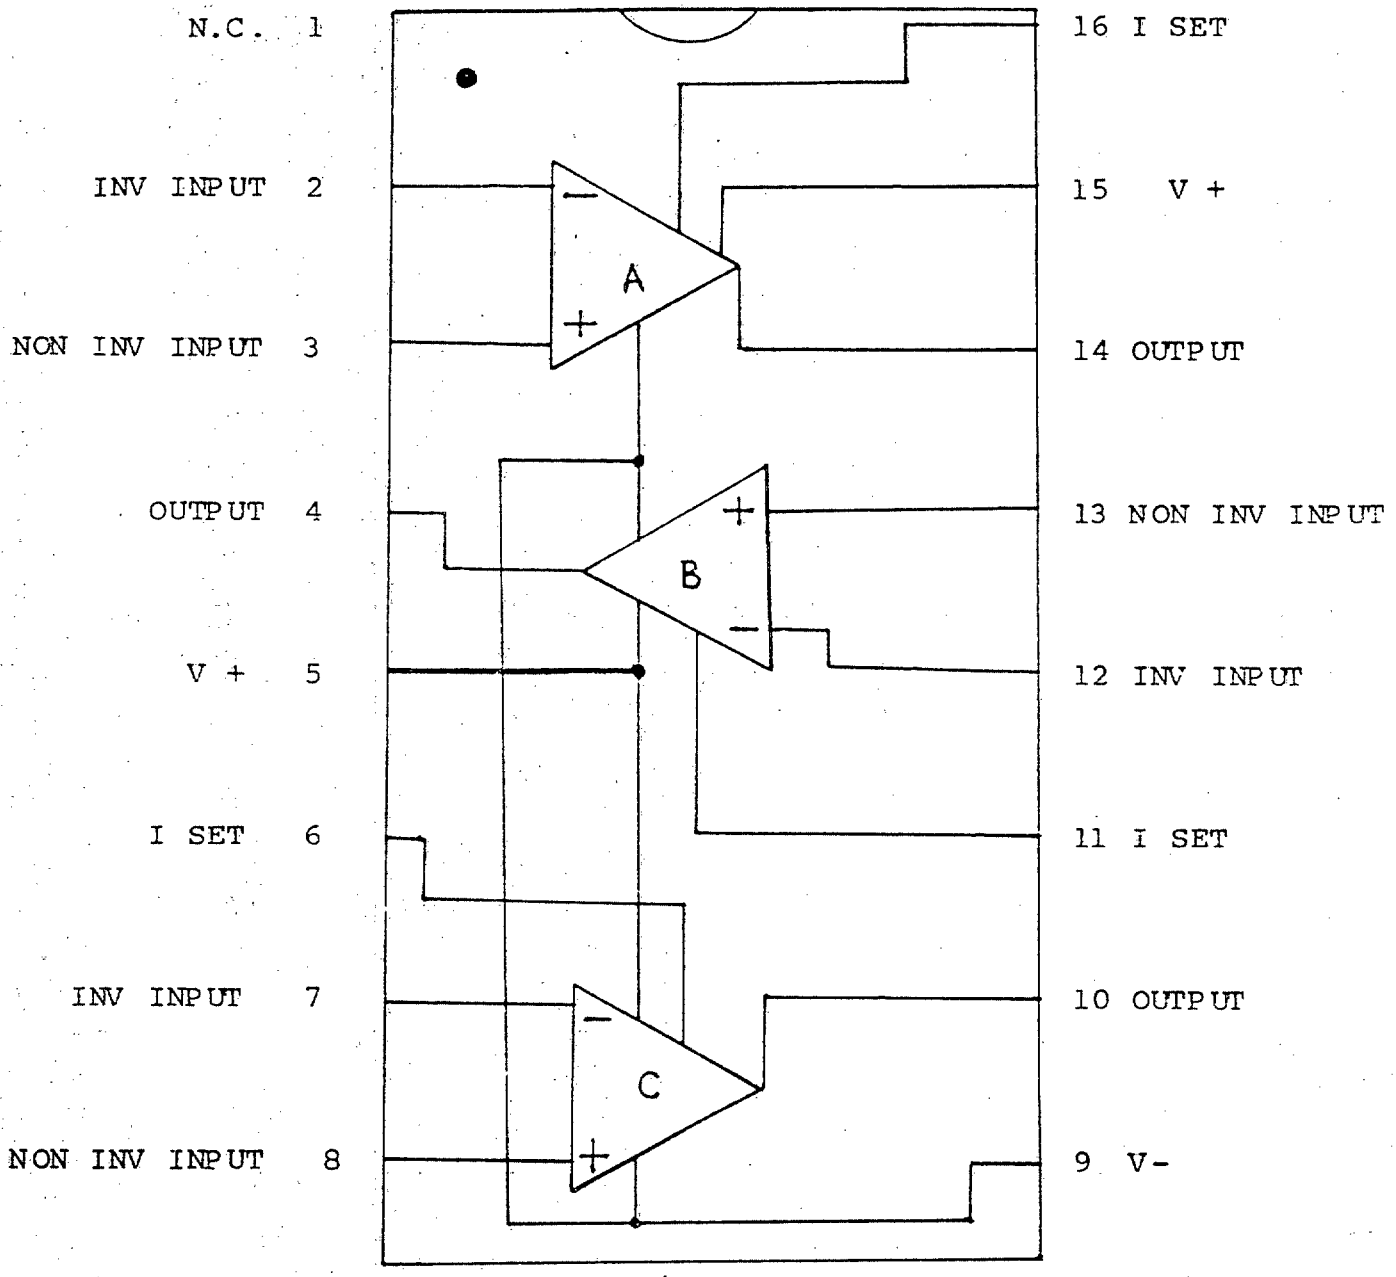


FIGURE 1 - Terminal assignment and logic diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

3.6.2 Lot by lot acceptance tests. Lot by lot acceptance tests shall comply with requirements described in TABLE IV."

PAGE 7

TABLE II. Delete in its entirety and substitute the following:

"TABLE II

Screen	Method	Requirement
Internal Visual	2010, test condition B	100%
Stabilization bake	1008, 24 hrs @ condition C min (see para. 3.3.1)	100%
Temperature Cycling	1010, test condition C	100%
Constant Acceleration	2001, test condition E (min) Yi	100%
Visual inspection	--	100%
Burn-in-test	1015, 160 hrs @ 125°C min (see para. 4.3.3.1)	100%
Post-burn-in	(see electrical parameter per TABLE I)	100%
Percent defective Allowable (PDA) calculations	5%, See 3.5.1 (Method 5004)	All lots
Final electrical test	per device specification (see TABLE I)	100%
Seal	--	100%
External visual	2009	100%"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.

PAGE 11

4.2.3: Delete paragraph in its entirety and substitute the following paragraph:

"4.2.3 Screening. Screening shall be in accordance with MIL-STD-883, Method 5004, Class B and TABLE II".

4.2.4.2: Delete temperature "+60°C" and substitute "+65°C"

PAGE 13

4.3.3.1, First line: Delete the word "conorm" and substitute "conform".

Fifth line down: Delete "125°C for 168 hours minimum".

4.3.3 Delete in its entirety and substitute:

"Screening. Screening shall be in accordance with MIL-STD-883 Method 5004 Class B and TABLE II."

PAGE 14

* 6.3 Approved source of supply. Delete Vendor "Honeywell, Inc. ... 22002904".

Add the following vendors:

"Vendor(s)		Code Ident. No.
TLSI Inc. 815 Broadhollow Rd. Farmingdale, NY 11735	(Not qualified for Modular Pack Mine System M131 Disp.)	78711
ATMEL Corporation 1150 E. Cheyenne Mountain Blvd. Colorado Springs, CO 80906 Ref. Part No. 22002904"	(FSCM OHSWS)	

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-0639)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:27Z
Check the source to verify that this is the current version before use.