
MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, COAXIAL, SEMIRIGID, CORRUGATED OUTER CONDUCTOR, LOW LOSS FOAM DIELECTRIC, 1-5/8 INCH NOMINAL, 50 OHMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of MIL-C-28830.

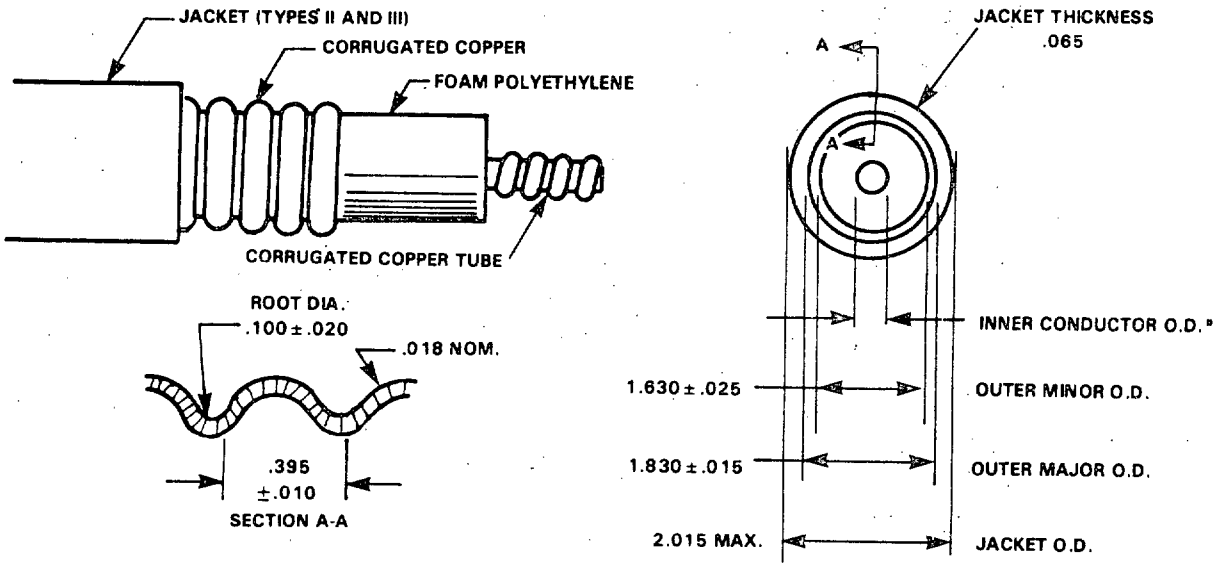

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch - 25.4 mm.

*Helically corrugated inner conductor.
Outside Diameter: 0.680 ± .005
Strip Thickness: .019 NOM.
Minor Outside Diameter: .570 ± .015
Pitch: .400 ± .010

INCHES	MM
.005	.13
.010	.25
.015	.38
.017	.43
.018	.46
.019	.48

INCHES	MM
.020	.51
.025	.64
.065	1.65
.100	2.54
.395	10.03
.400	10.16

INCHES	MM
.570	14.48
.680	17.27
1.630	41.40
1.830	46.48
2.015	51.18

FIGURE 1. Cable configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:21Z
Check the source to verify that this is the current version before use.

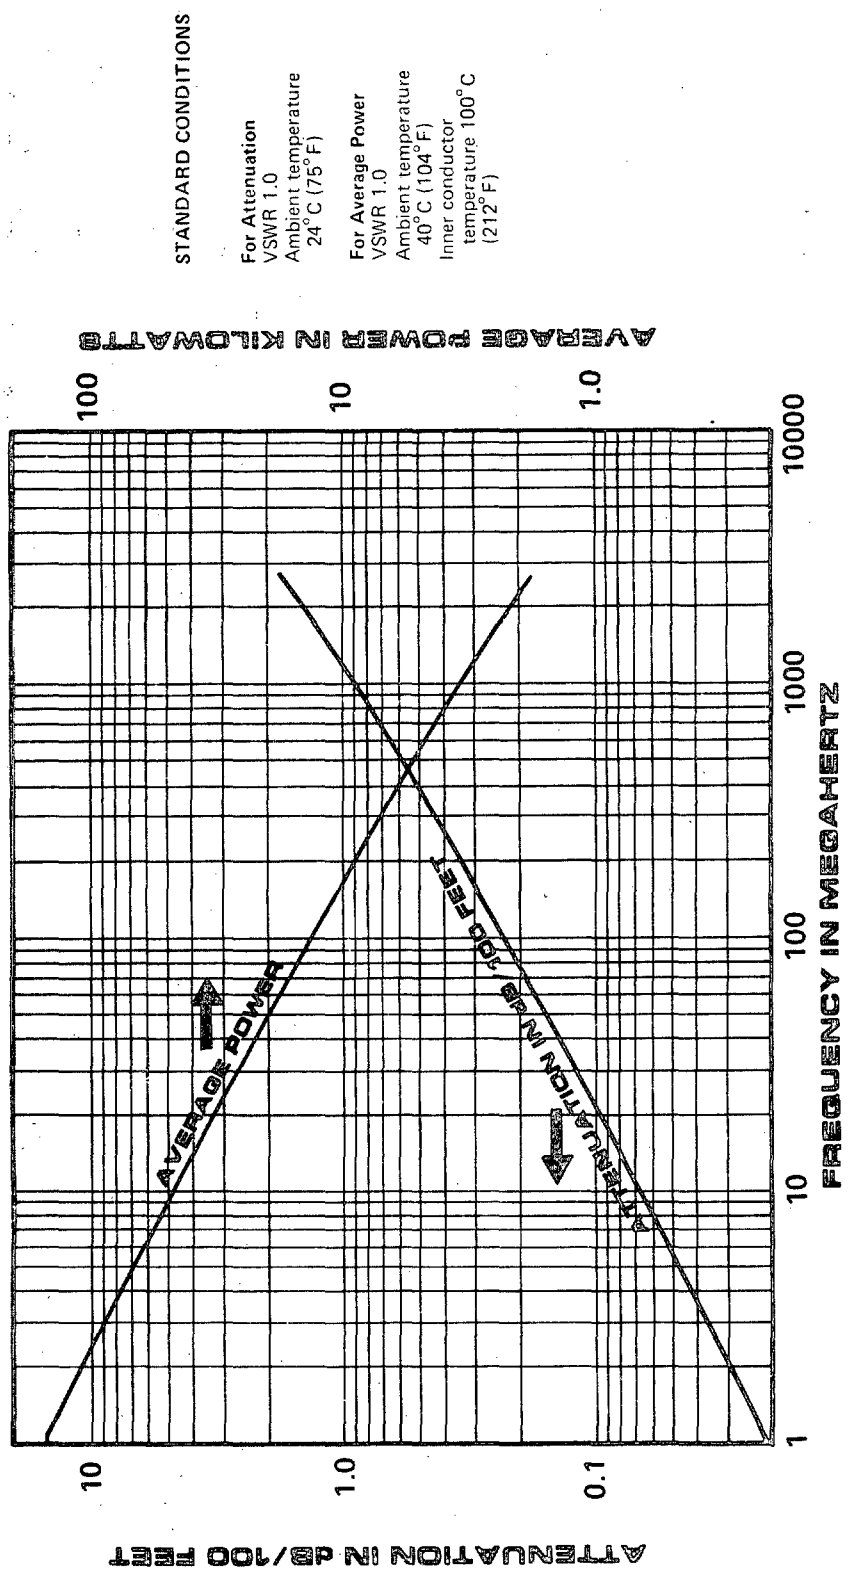


FIGURE 1. Cable configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Flexibility and cold bend mandrel diameter: 40 inches (101.6 cm) maximum.
(Test cable length: 30 feet (9.144 m).)
Impedance: 50 ±2 ohms.
Attenuation: 0.53 dB/100 ft. (30.48 m) at 400 megahertz (MHz)
0.97 dB/100 ft. (30.48 m) at 1000 MHz
1.55 dB/100 ft. (30.48 m) at 2000 MHz
Velocity of propagation: 88 percent nominal
Capacitance: 23.1 pF/ft. nominal
Voltage standing wave ratio (VSWR): 1.70 maximum
VSWR frequency range: 100 MHz to 2.4 gigahertz (GHz)
Dielectric withstanding voltage: 15,000 VDC
Jacket Spark: 10,000 V RMS
Part numbers: M28830/5-II
M28830/5-III

ENGINEERING INFORMATION:

Weight: 1.00 lbs/ft. nominal
Minimum in-service bending diameter: 40 inches (101.6 cm).
Average power rating: Figure 2

Preparing activity:
NAVY-(EC)
(Project 6145-0795-4)

Custodians:
Army - CR
Navy - EC
Air Force - 85
Review activities:
Army -
Navy - AS, MC
Air Force - 17, 99
DLA - IS
User activities:
Army -
Navy - SH
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:21Z
Check the source to verify that this is the current version before use.