FED. SUP CLASS
5340

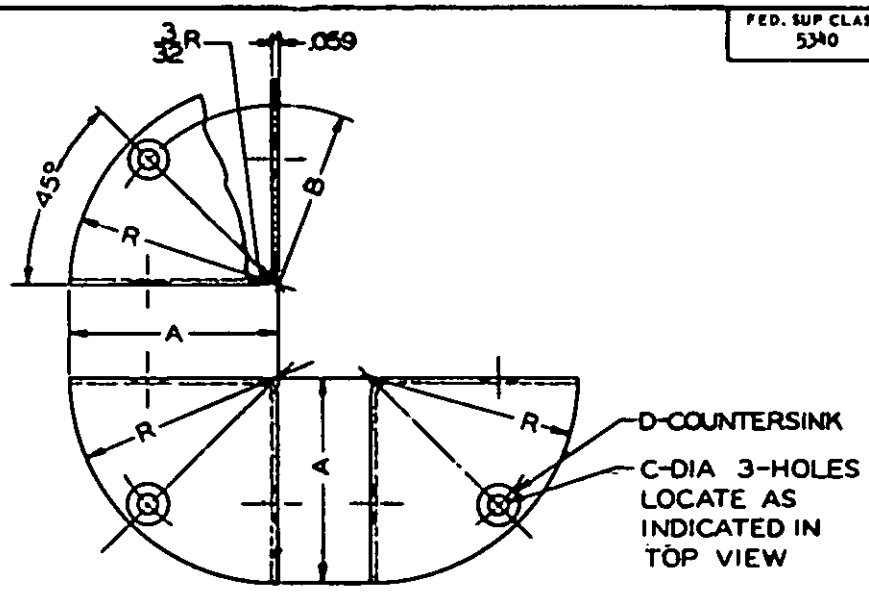

FINISH: BRASS-PLAIN

STEEL-ZINC PLATED CLASS 2, TYPE III PER FEDERAL SPECIFICATION QQ-Z-325
OR CADMIUM PLATED TYPE III, CLASS 1 PER FEDERAL SPECIFICATION QQ-P-416

MS PART NO.	DIMENSIONS A LENGTH	B RADIUS	C DIA	D COUNTERSINK	MATERIAL AND SPECIFICATION
MS35254-1	2	1 3/8	.208	82° TO 3/8 +1/64 DIA	BRASS PER FED SPEC QQ-B-613 COMPOSITION 2 HALF HARD (A1)
MS35254-2	2	1 3/8	.208	SAME	
MS35254-3	2	1 3/8	.180	82° TO 21/64 +1/64 DIA	
MS35254-4	2	1 3/8	.180	SAME	
MS35254-5	1 1/2	1 1/8	.180	82° TO 21/64 +1/64 DIA	
MS35254-6	1 1/2	1 1/8	.180	SAME	
MS35254-7	1 1/2	1 1/8	.152	82° TO 9/32 +1/64 DIA	
MS35254-8	1 1/2	1 1/8	.152	SAME	
MS35254-9	1 1/8	1	.152	82° TO 9/32 +1/64 DIA	
MS35254-10	1 1/8	1	.152	SAME	
MS35254-11	1 1/8	1	.128	82° TO 7/32 +1/64 DIA	
MS35254-12	1 1/8	1	.128	SAME	
MS35254-13	1 1/8	7/8	.128	82° TO 7/32 +1/64 DIA	
MS35254-14	1 1/8	7/8	.128	SAME	
MS35254-15	2	1 3/8	.208	82° TO 3/8 +1/64 DIA	STEEL PER FED SPEC QQ-S-698 COLD ROLLED COMMERCIAL QUALITY NO. 2 TEMPER NO. 1 FINISH (A2)
MS35254-16	2	1 3/8	.208	SAME	
MS35254-17	2	1 3/8	.180	82° TO 21/64 +1/64 DIA	
MS35254-18	2	1 3/8	.180	SAME	
MS35254-19	1 1/2	1 1/8	.180	82° TO 21/64 +1/64 DIA	
MS35254-20	1 1/2	1 1/8	.180	SAME	
MS35254-21	1 1/2	1 1/8	.152	82° TO 9/32 +1/64 DIA	
MS35254-22	1 1/2	1 1/8	.152	SAME	
MS35254-23	1 1/8	1	.152	82° TO 9/32 +1/64 DIA	
MS35254-24	1 1/8	1	.152	SAME	
MS35254-25	1 1/8	1	.128	82° TO 7/32 +1/64 DIA	
MS35254-26	1 1/8	1	.128	SAME	
MS35254-27	1 1/8	7/8	.128	82° TO 7/32 +1/64 DIA	
MS35254-28	1 1/8	7/8	.128	SAME	

TOLERANCES ON FRACTIONS ±1/64, ON DECIMALS ±.005, ON ANGLES ±1°, UNLESS OTHERWISE SPECIFIED.

ALL DIMENSIONS IN INCHES

AMENDED & REVISED (A) 2 Nov 67

AMENDED & JUNE 1955 REVISED

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
Navy YD
Army EL
AF 82

The military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	TITLE	MILITARY STANDARD
Other Cust: EL, YD, 82	BRACE, CORNER, 90°, 3 QUARTER-ROUND FLANGES, 3 MOUNTING HOLES	MS35254
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5320-069%

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.