FED. SUP CLASS
5935

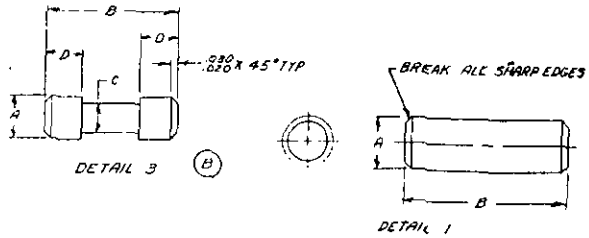

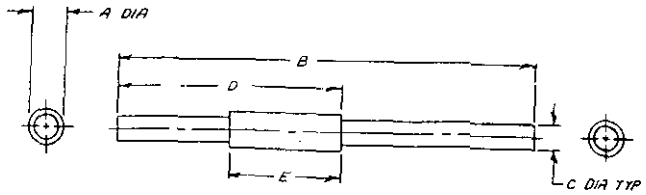

MS PART NUMBER	DETAIL	CONNECTOR CONTACT SIZE	A DIA	B	C DIA	D	E	COLOR CODE	SUPERSEDED BY
MS27187-1	1	16	.105 .100	.565 .535				BLUE	MS27488A16
-2	1	12 AND 22 SHIELDED	.145 .135	.565 .535				YELLOW	MS27488A12
-3	2	22	.064 .058	.946 .934	.053 .047	.451 .439	.196 .184	WHITE	MS27488A20
-4	3	20 SHIELDED *	.330 .320	.750 .730	.290 .285	.253 .243		WHITE	MS27488A4

MATERIAL: POLYTETRAFLUOROETHYLENE EXTRUDED STOCK, MECHANICAL GRADE, OR EQUAL.
ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .004 TIR.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: ANGLES ±5°.
THESE ITEMS FOR USE WITH MIL-C-26518 and MIL-C-38300.
*REF. IS TO MS27184-20P,MS27185-20S AND MS27450-20S SHIELDED CONTACTS.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) CANCELLED - FOR PROCUREMENT USE MS27488.

(C) Denotes changes

APPROVED 21 DEC 1961 REVISED (A) 11 MARCH 1965 (B) 7 DEC 1967 (C) 20 April 1979

User activities:

Review activities:
Air Force - 99

This military standard is approved for use by Directorate of Electronic Support (AFALD/PTS) , Department of the Air Force , and is available for use by all Departments and Agencies of the Department of Defense.

P.A AIR FORCE-85 Other Cust	International interest	TITLE PLUG, END SEAL, ELECTRICAL CONNECTOR	MILITARY STANDARD MS 27187(USAF)
Procurement Specification NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-F120

☆ U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/1771

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.