INCH-POUND
MIL-B-49450/2A(ER)
8 November 1994

SUPERSEDING
MIL-B-49450/2(ER)
16 January 1987

MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, DIODE ASSEMBLY

This specification is approved for use by the Army Research Laboratory, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49450.

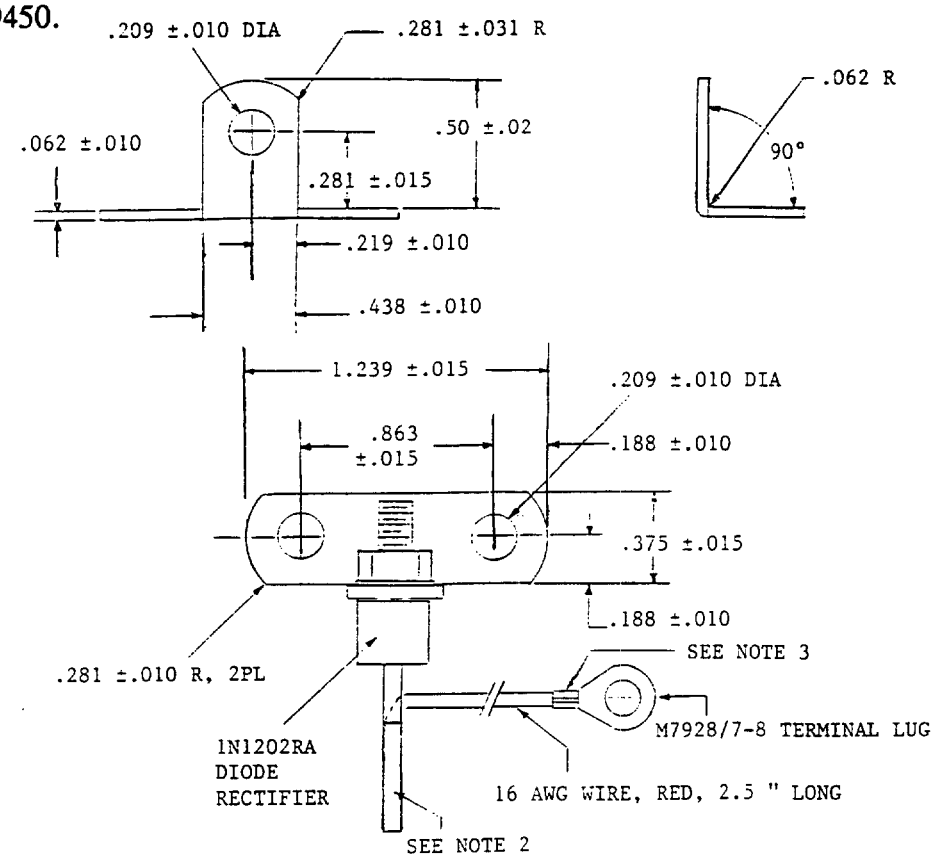


Figure 1. Configuration and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Ⓐ 1. The diode mounting connector shall be constructed of copper alloy conforming to ASTM-B133, ASTM-B272, or ASTM-B152.

2. The diode mounting connector shall be plated in accordance with QQ-N-290, Class I, Grade E.

3. The diode mounting connector shall be formed with no evidence of visible cracks.

4. The torque range for the 10-32 hexagonal head shall be 20 to 24 in-lbs.

5. The diode mounting scheme shown in the figure is preferred. Alternate mounting configurations may be used upon one time approval by the government.

DRAWING NOTES:

1. All dimensions are in inches, unless specified otherwise.

2. The wire shall be soldered onto the diode terminal per Requirement 5 of MIL-STD-454. The soldered joint shall be potted per Requirement 3.6.6 of MIL-B-49450 (ER). The soldered joint shall be covered by a 0.75 inch long shrinkable tubing.

3. Terminal lug shall be crimped onto wire. The crimped joint shall be potted per Requirement 3.6.6 of MIL-B-49450(ER) and covered by shrinkable tubing.

Preparing Activity:
Army-ER

(Project 6140-A799)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.