METRIC


DOD-P-63464/6A
21 April 1982
SUPERSEDING
DOD-P-63464/6
7 December 1979

MILITARY SPECIFICATION SHEET

PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE, CORROSION-RESISTANT STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63464.

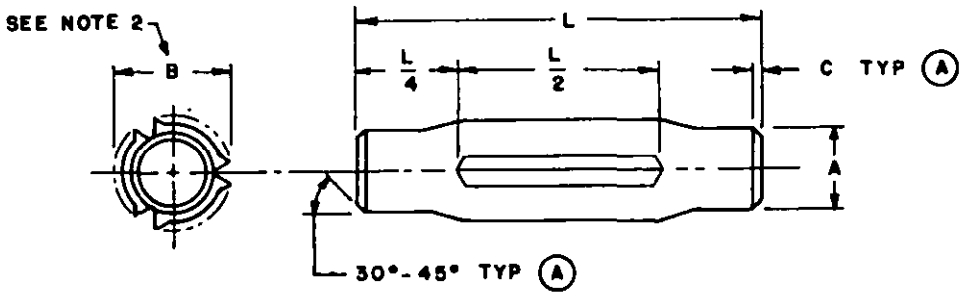

NOTES:

1. All dimensions are in millimeters.
2. Diameter "B" is the expanded diameter as measured with a "GO and "NOT GO" ring gage.

(A) FIGURE 1. PIN, GROOVED, HEADLESS-LONGITUDINAL CENTER GROOVE.

(A) denotes changes

FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.


REQUIREMENTS:

1. Material: CRES, 300 series.

2. Surface treatment: Cleaning and descaling.

3. Part number: Consists of the letter "D", the basic number of this specification sheet and a dash number taken from table I.

Example: D63464/6-01516

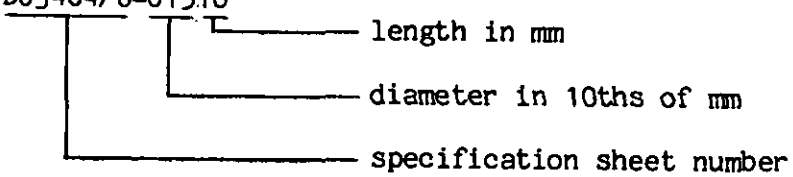

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. (A)

Nom size		1.5		2		2.5		3		4		5		6	
A Dia	max	1.50		2.00		2.50		3.00		4.00		5.00		6.00	
	min	1.47		1.97		2.47		2.57		3.95		4.95		5.95	
Recm hole size	max	1.54		2.05		2.55		3.05		4.06		5.07		6.08	
	min	1.50		2.00		2.50		3.00		4.00		5.00		6.00	
C Chamfer length	max	0.4								0.8					
L ±0.25 Length		Dash no	B Dia +0.05 -0.00	Dash no	B Dia +0.05 -0.00	Dash no	B Dia ±0.05	Dash no	B Dia ±0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05	Dash no	B Dia +0.05
6.00		01506	1.58	02006	2.10										
8.00		01508	1.58	02008	2.10										
10.00		01510	1.58	02010	2.10	02510	2.65	03010	3.20	04010	4.20				
12.00		01512	1.58	02012	2.10	02512	2.65	03012	3.20	04012	4.20	05012	5.25		
16.00		01516	1.58	02016	2.10	02516	2.65	03016	3.20	04016	4.20	05016	5.25	06016	6.20
20.00		01520	1.58	02020	2.05	02520	2.60	03020	3.15	04020	4.20	05020	5.25	06020	6.20
26.00						02526	2.60	03026	3.15	04026	4.15	05026	5.20	06026	6.20
30.00								03030	3.15	04030	4.15	05030	5.20	06030	6.20
40.00										04040	4.15	05040	5.20	06040	6.15
50.00												05050	5.20	06050	6.15
60.00														06060	6.15
70.00															

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Research and Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE DOD-P-63464/6A

PIN,GROOVED,HEADLESS-LONGITUDINAL CENTER GROOVE,CORROSION-RESISTANT STEEL,METRI

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:56Z
Check the source to verify that this is the current version before use.