
FED. SUP CLASS
5340

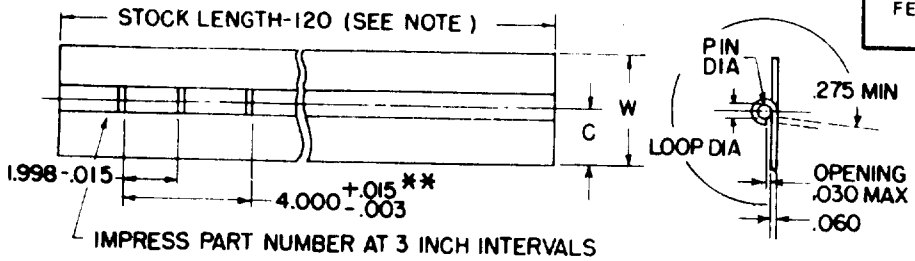

END LOOPS SHALL BE A MINIMUM OF 3/4"

DASH NO.*	WIDTH W	WIDTH C	PIN NO. (LOOP DIA .315 +.007 -.001, PIN DIA .312 -.002)
-1A	3	1 1/2	MS 27990-7A
-1B			-7B
-1C			-7C
-1D			-7D
-1E			-7E
-2A	3 1/2	1 3/4	-7A
-2B			-7B
-2C			-7C
-2D			-7D
-2E			-7E
-3A	4	2	-7A
-3B			-7B
-3C			-7C
-3D			-7D
-3E			-7E
-4A	5	2 1/2	-7A
-4B			-7B
-4C			-7C
-4D			-7D
-4E			-7E
-5A	6	3	-7A
-5B			-7B
-5C			-7C
-5D			-7D
-5E			-7E

DASH NO.*	WIDTH W	WIDTH C	PIN NO. (LOOP DIA .378 +.007 -.001, PIN DIA .375 -.002)
-6A	3	1 1/2	MS 27990-8A
-6B			-8B
-6C			-8C
-6D			-8D
-6E			-8E
-7A	3 1/2	1 3/4	-8A
-7B			-8B
-7C			-8C
-7D			-8D
-7E			-8E
-8A	4	2	-8A
-8B			-8B
-8C			-8C
-8D			-8D
-8E			-8E
-9A	5	2 1/2	-8A
-9B			-8B
-9C			-8C
-9D			-8D
-9E			-8E
-10A	6	3	-8A
-10B			-8B
-10C			-8C
-10D			-8D
-10E			-8E

** CUMULATIVE TOLERANCE ON PITCH IS ± .015

© INACTIVE FOR NEW DESIGN AFTER 22 JAN 1976.

ALL DIMENSIONS IN INCHES

FOR CHANGES SEE SHEETS 1 & 2
TOLERANCES ON FRACTIONS ± 1/32 UNLESS OTHERWISE SPECIFIED

APPROVED 24 JUNE 1957 REVISED ⊗ 3 AUG 61 ① 10 DEC 71 ©22 JAN 1976

User activities: Army MC, Navy, Air Force

Reviewer activities: Army MC, GL, EL, Navy, Air Force, DSA IS

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC	International interest	TITLE	MILITARY STANDARD
Other Cust AS 82		HINGE, CONTINUOUS, (PIANO) .060 THICKNESS, 312 & .375 PIN DIA	MS35828
Procurement Specification MIL-H-9850		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 APR 66 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5340-1147

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

NOTES

FINISH: ALUMINUM, BRASS, AND STEEL, CORROSION-RESISTING - PLAIN
STEEL, CARBON - ZINC PLATED TYPE II, CLASS 2, PER FEDERAL SPECIFICATION QQ-Z-325
OR CADMIUM PLATED TYPE II, CLASS 1 PER FEDERAL SPECIFICATION QQ-P-416
APPLICATIONS MAY BE OF ANY LENGTH WITHIN THE STOCK LENGTH DIMENSION SHOWN ABOVE

*MATERIAL:

A: ALUMINUM - FLANGE, TEMPER H24 OR H34 HALF-HARD, PER FEDERAL SPECIFICATION QQ-A-250/8

B: BRASS - FLANGE, ALLOY 268, TEMPER HALF-HARD, PER FEDERAL SPECIFICATION QQ-B-613

C: STEEL, CORROSION RESISTING - FLANGE, CLASS 301, CONDITION A, TEMPER ANNEALED, PER FEDERAL SPECIFICATION QQ-S-766

D: STEEL, CARBON - FLANGE, COLD-ROLLED, TEMPER No. 2 HALF-HARD, FINISH No. 1 (DULL), PER FEDERAL SPECIFICATION QQ-S-698

E: STEEL, CARBON - FLANGE, COLD-ROLLED, TEMPER No. 2 HALF-HARD, PER FEDERAL SPECIFICATION QQ-S-698, CADMIUM PLATED, TYPE II, CLASS 1, PER FEDERAL SPECIFICATION QQ-P-416

F: PIN MATERIAL SHALL BE IN ACCORDANCE WITH MILITARY STANDARD MS27990, PIN, STRAIGHT, HINGE, PIANO.

1. THE MS PART NUMBER IS THE MS SHEET NUMBER PLUS THE APPLICABLE DASH NUMBER; EXAMPLE: MS -1A.
2. DOCUMENTS REFERRED TO HEREIN SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
3. THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.
4. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERRED TO HEREIN.

© INACTIVE FOR NEW DESIGN SEE SHEET 1

APPROVED 24 JUNE 1957 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 & 2 Ⓑ SEE SHEET 2 © FOR CHANGES SEE SHEET 1

User activities: Army Navy MC Air Force

Preparing activities: Army WC, SL, EL Navy Air Force DSA IS

Th... ary standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust AS 82	International interest	TITLE HINGE, CONTINUOUS, (PIANO) .060 THICKNESS, .312 & .375 PIN DIA	MILITARY STANDARD MS35828
Procurement Specification MIL-H-9850		SUPERSEDES:	SHEET 2 OF

DD FORM 1 APR 66 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.