
FED. SUP CLASS
6640

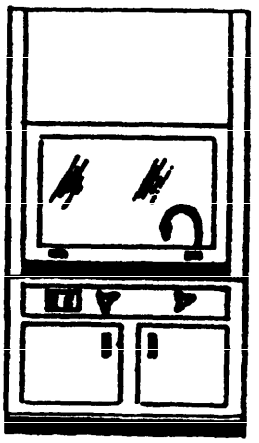

PART NUMBER	LENGTH	DIM	FACE OPENING M²
MS36233-1			1.98
MS36233-2			2.74
MS3623[illegible]			3.54
MS36[illegible]			4.24
*MS362[illegible]			5.06
*MS3623[illegible]			5.85

CANCELLED
CANCELLED AFTER 10 JUN 1991
NO SUPERSEDING STANDARD

* Include[illegible]

MATERIAL: Ho[illegible] .teel in accordance with ASTM A569. In[illegible] ..ansite.

DESIGN: The [illegible] .steel framing concealed by full double wall flush const[illegible] interior lining and baffle shall be transite that is flush with n[illegible] opening to minimize air turbulence. The complete assembly shall consist of a counterbalanced sash with .60 mm thick safety glass; base cupboard with half depth shelf; a sealed fluorescent light with safety glass cover; an acid-resistant composition stone work top and acid resistant finish on all steel parts. The minimum velocity of air across the face opening shall be 30 m per minute.

Hood shall be furnished with the following service fixtures: one combination toggle light switch and duplex electric socket; one gas outlet and one gooseneck with remote controls; one lead bowl.

Hood blowers shall be as specified at invitation for bids.

All electrical components shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

Ⓐ CANCELLATION

APPROVED 24 JUN 1960 REVISED Ⓐ 10 JUN 1991

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA		HOOD, FUME, LABORATORY, STEEL, CARBON, MODELS	MS36233
Other Code MS 99			
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD, FORM, MAY 72 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE CANCELLATION

Project Number 6640-1712

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:36Z
Check the source to verify that this is the current version before use.