
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

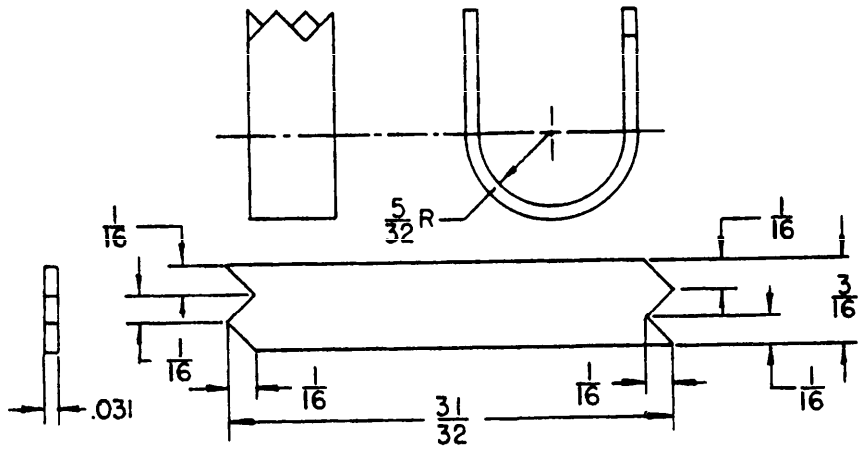

DEVELOPED LENGTH

DASH NO.	FIIN
-1	

NOTES:

1. REFERENCED SPECIFICATIONS OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
2. MATERIAL SHALL BE STEEL, AS-ROLLED, CONDITION NO. 3, QUARTER HARD TEMPER, REGULAR BRIGHT FINISH, PER FEDERAL SPECIFICATION QQ-S-636.
3. FINISH SHALL BE CADMIUM PLATE PER FEDERAL SPECIFICATION QQ-P-416, TYPE II, CLASS C, OR ZINC COAT PER FEDERAL SPECIFICATION QQ-Z-325, TYPE II, CLASS 3.
4. REMOVE ALL BURRS AND SHARP EDGES.
5. THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN

APPROVED 7 MAY 1956 REVISED

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.005 ON DECIMALS, ±1/64 ON FRACTIONS.

CUSTODIANS	OTHER INT.
A - SIG C N - AER USAF	A- O N- SH AF- USAF

MILITARY STANDARD

COLLAR, CABLE

MS 35762

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.