FED SUP CLASS
5310

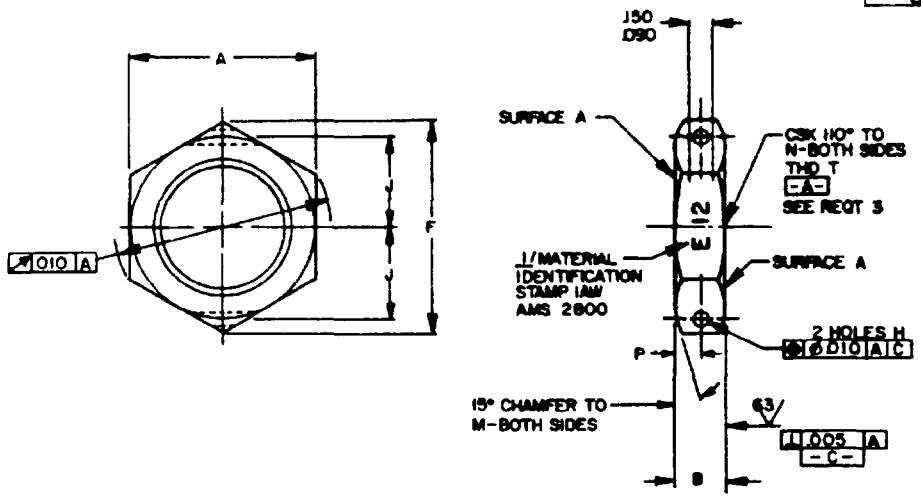


TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	NOM TUBE OD	THREAD T	A	B	F MIN	ØH ± 005	J BASIC	ØM	ØN	P BASIC	APPROX WEIGHT LB/100
-02	.125	3125-24 UNJF-3B	553- 564	.219	631	047	.240	.562	.322	.110	.43
-03	188	375-24 UNJF-3B	.616- 627	219	703	047	270	625	385	110	.49
-04	250	.4375-20 UNJF-3B	679- 690	.250	.775	.047	.305	.688	.448	125	.66
-05	312	500-20 UNJF-3B	.741- 752	.250	.846	055	.340	.750	.510	125	.75
-06	375	5625-18 UNJF-3B	803- 814	266	916	055	.370	.812	.572	133	.88
-07	438	.625-18 UNJF-3B	865-.877	.266	.987	055	405	875	635	133	99
-08	.500	750-16 UNJF-3B	990-1.002	.312	1.130	.062	.470	1.000	760	.157	1.39
-09	562	8125-16 UNJ-3B	1 052-1 064	312	1.200	.062	.500	1.062	822	.157	1.47
-10	.625	.875-14 UNJF-3B	1.114-1 127	359	1.271	.062	.540	1 125	885	180	1.89
-11	688	1 000-12 UNJF-3B	1 301-1 314	.406	1.484	070	.625	1.312	1.010	.204	3 06
-12	750	1 0625-12 UNJ-3B	1 364-1 377	.406	1.556	070	660	1.375	1 072	.204	3.26
-14	875	1.1875-12 UNJ-3B	1 489-1 502	406	1 699	070	725	1 500	1 198	204	3.64
-16	1 000	1 3125-12 UNJ-3B	1 614-1 627	406	1.842	070	790	1.625	1 322	.204	4.07
-18	1 125	1 500-12 UNJF-3B	1 800-1 814	406	2 054	070	890	1.812	1 510	.204	4 70
-20	1 250	1 625-12 UNJ-3B	1 926-1 940	406	2 198	070	960	1 938	1 635	.204	5.15
-24	1 500	1 875-12 UNJ-3B	2 176-2 190	406	2 483	070	1 095	2.188	1 885	.204	6.06
-28	1 750	2 250-12 UNJ-3B	2 549-2 564	406	2 908	070	1.295	2.562	2.260	204	7.47
-32	2.000	2 500-12 UNJ-3B	2 799-2 814	406	3 194	070	1 425	2 812	2 510	.204	8 47

© ENTIRE STANDARD REVISED

PA: NAVY-AS; Other Cust: ARMY-AV	INTERNATIONAL INTEREST	TITLE: NUT,PLAIN,HEX,BOSS CONNECTION, ALUMINUM	MILITARY STANDARD MS9200
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES		PAGE 1 OF 2

DD FORM 672-1 COORDINATED PREVIOUS EDITIONS ARE OBSOLETE 5310-1561

APPROVED 15 OCT 58 REVISED © 30 SEP 86

USER ACTIVITIES
ARMY-AT,ER,ME

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

REQUIREMENTS:

1 MATERIAL ALUMINUM IN ACCORDANCE WITH AMS 4121-78

2 FINISH. ANODIC TREATMENT IN ACCORDANCE WITH AMS 2470-84

3 THREADS THREADS SHALL BE IN ACCORDANCE WITH MIL-S-8879

4 SURFACE TEXTURE SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH AS291-64

5 MARKING IN MULTIPLE MARKING OF BAR STOCK, DUPLICATION OF WHOLE OR PART OF SYMBOL OR OFFSET OF SYMBOL SUCH THAT UPPER PORTION APPEARS BELOW LOWER PORTION OF FINISHED PART IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN PARTS SHALL BE MARKED BEFORE THREADING

6 EDGES. BREAK SHARP EDGES .003-.015, UNLESS OTHERWISE SPECIFIED

7 TOLERANCES UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR LINEAR DIMENSIONS ± .010, FOR ANGULAR DIMENSIONS ±5°

8. PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9200-02

DASH NUMBER

BASIC MS NUMBER

MS9200-02 INDICATES - NUT, PLAIN, HEXAGON BOSS CONNECTION, 3/125-24 UNJF-3B

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

6 AS AND AMS ARE SAE PUBLICATIONS

APPROVED 15 OCT 58 REVISED (C) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES
ARMY-AT, ER, ME

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A NAVY-AS Other Cust ARMY-AV	INTERNATIONAL INTEREST	TITLE NUT, PLAIN, HEX, BOSS CONNECTION, ALUMINUM	MILITARY STANDARD MS9200
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1561

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.