
MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CONNECTOR (U-61/U)

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442(AS).

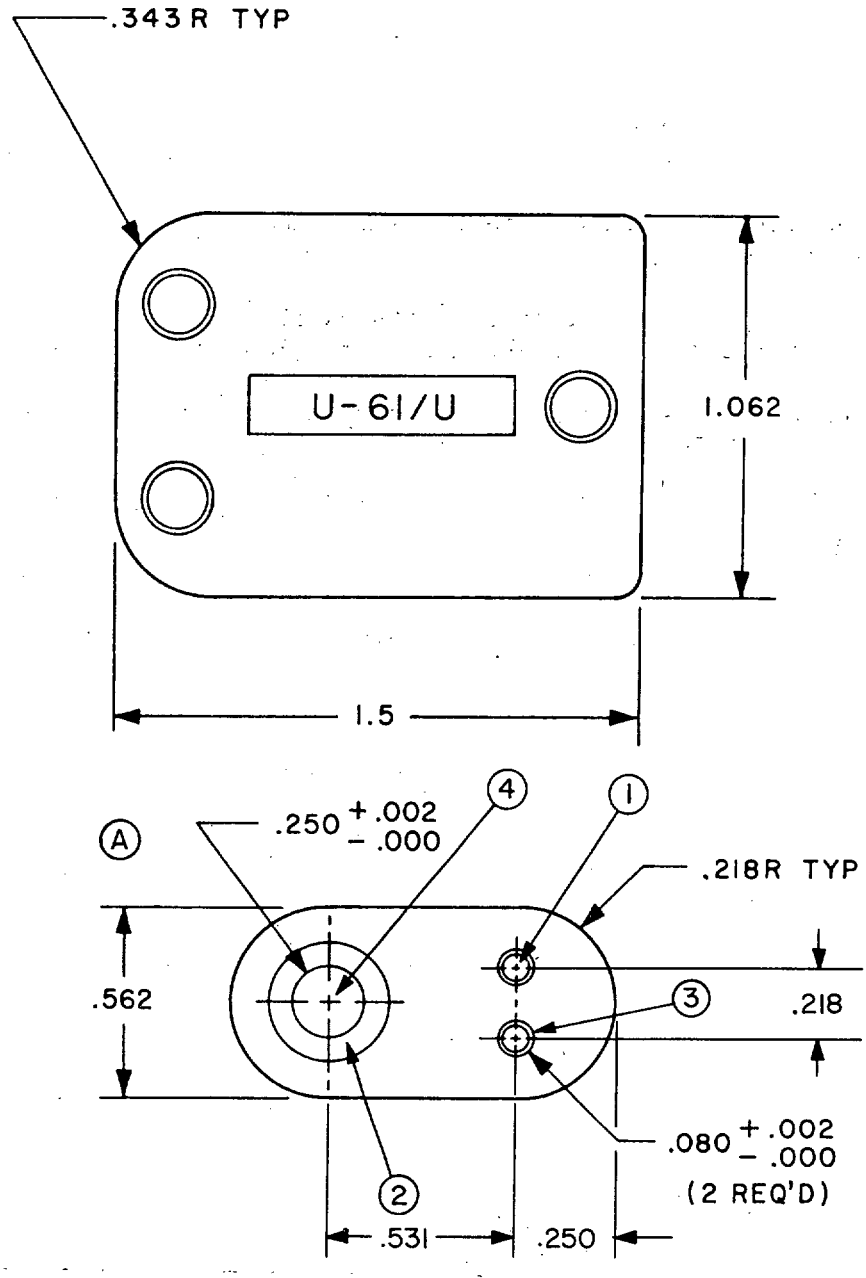

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. M22442/4-1 (U-61/U) shall be capable of mating with M22442/5-1 (U-75/U).

2. Sampling and testing procedures shall be in accordance with MIL-J-641.

3. The connector shall pass the following tests when tested in accordance with MIL-J-641.

   a. Visual and mechanical
   b. Dielectric strength
   c. Contact resistance
   d. Insertion and withdrawal force
   e. Spring life
   f. Salt spray
   g. Insulation resistance
   h. Moisture resistance

4. The insertion force shall be 8 lbs maximum. The withdrawal force shall be 6 $\pm$ 2 lbs.

5. After the spring life test the withdrawal force shall be greater than 60 percent of the withdrawal force measured prior to test.

6. The connector insulating materials shall conform to MIL-M-14 type SDG or MIL-M-21347 Type II.

7. Metal parts shall meet all the requirements and tests of MIL-J-641.

NOTES:

1. Dimensions in inches. Unless otherwise specified, tolerances: linear $\pm$ .015.

Preparing Activity
Navy - AS
Project No. 5995-N110-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.