INCH-POUND

A[illegible]290

December 12, 1995

COMMERCIAL ITEM DESCRIPTION

SWEAT PANTS

The General Services Administration has authorized the use of this commercial item description as a replacement for BBB-S-1269 for all Federal agencies.

1. SCOPE.

1.1 Scope. This commercial item description covers the requirements for a knitted, cotton blended, fleeced sweat pants for use by personnel of Government agencies

2. CLASSIFICATION. The sweat shirt shall be furnished in the following classes and sizes:

Class 1 -	White (bleached)
Class 2 -	Silver gray
Class 3 -	Nickel gray

Schedule of sizes

Small	Large
Medium	Extra large

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNSC, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Description. The sweat pants shall have a ribbed knit or elastic waist and drawcord. The waist shall have a drawcord. The sweat pants shall have elastic leg bottoms, and the seams shall be coverstitched.

3.2 Material.

3.2.1 Basic material. The basic material shall be a blend of cotton and polyester, having a minimum of 50 percent cotton and the remainder polyester. The material shall be a jersey knit with fleece backing, weighing a minimum 6.75 ounces per square yard when tested in accordance with ASTM D-3776, Option C. The dyed, knitted cloth shall have a minimum rating of 4 when tested for colorfastness to laundering (after 3 wash and dry cycles) in accordance with AATCC 61-Test 3A. The knitted cloth shall have a minimum rating of 4 when tested for colorfastness to perspiration in accordance with AATCC 15. The test for colorfastness to alkaline solution shall apply. The cloth shall meet the Flammable Fabrics Act as required by law. No flame-retardant finish shall be permitted.

3.2.1.1 Shade matching. The color and appearance of the cloth shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and that have a correlated color temperature of 7500 ± 200K, with illumination of 100 ± 20 foot candles and shall be a good match to the standard sample under incandescent lamplight at 2300 ± 200K.

3.2.2 Knit trim. The 1x1 inch rib knit trim for the waistband, shall be approximately 4-1/2 inches wide and of double thickness. The color shall be closely matched to the appropriate basic cloth color. The same tests used for testing the color fastness of the basic cloth shall apply.

3.2.3 Elastic. The optional waist elastic shall be of a sufficient width to be enclosed in the 1-1/2 inch wide waist and appropriate for the purpose intended. The elastic for the leg bottoms shall be a sufficient width to be enclosed in a 1 inch wide bottom hem.

3.2.4 Cord. The waist tie cord shall be tubular, braided or knitted, and appropriate for the purpose intended. The ends of the cord shall be knotted. The color of the cord shall be bleached white.

3.2.3 Thread. The thread shall be cotton, match the color of the knitted cloth, and shall show good colorfastness to perspiration and laundering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.3 Labels. Each sweat pant shall have a commercial-type identification and size label attached to the center back below or caught into the waistband seam, on the inside. The label shall contain laundering instructions (according to the manufacturers' recommendations).

3.4 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfite having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.5 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written commercial item description and the figure, the written commercial item description shall govern.

3.6 Measurements. The finished sweat pants shall conform to the following measurements:

Measurements in inches

	Fig. 1	Small	Medium	Large	X-Large	Tolerance
Waist 1/	A	13	14	15	16	± 1/2
Seat width 2/	B	21-1/2	22-1/2	23-1/2	24	- 1/2 + 1
Thigh width 3/	C	9	10	11	12	± 1/2
Length 4/	D	41	43	45	47	± 1
Rise 5/	E	17	17-1/2	18	18-1/2	± 1/2
Waistband	F	4-1/4	4-1/4	4-1/4	4-1/4	± 1/4

1/ Waist (relaxed) 1/2 of waist measured between outside edges of waistband.

2/ Half (1/2) seat, measured across the garment at the fullest part between the crotch and the waistband.

3/ Half (1/2) thigh, measured across the leg front at the fullest part below the crotch line.

4/ Length measurement shall be taken from top outside of waistband to bottom of leg.

5/ Rise measurement shall be taken from bottom of crotch area to top edge of waistband at center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptance criteria. The item offered, or a generic equivalent, must have been sold to the commercial market or to the Government for at least 2 years.

5.3 Visual examination. Each sweat pant shall be examined for the defects listed below in accordance with ANSI/ASQC Z1.4.

5.3.1 Defects. Any hole, cut, or tear; uneven, ridgy cloth, or fleeced cloth not well napped on inside; any thin areas; slubby yarns more than normally visible on outside of shirt; color or shade not as specified; any spot or stain; any rancid odors; any component part missing or defective; any seams twisted, puckered, or pulled, affecting appearance; any part of garment caught in any unrelated part or stitching; any needle chews; tight or loose tension affecting appearance; any thread ends not cut; label missing, incorrect, or illegible; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any requirement not as specified; any items not packaged in accordance with the contract or purchase order.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents

ASTM Test Methods

(Applications for copies should be addressed to American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P. O. Box 12215, Triangle Park, NC 27709-2215.)

ANSI/ASQC Z1.4 - Sampling Procedures and Table for Inspection of Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

Rules and Regulations Under the Flammable Fabrics Act

(Applications for copies should be addressed to the Federal Trade Commission, Washington, DC 20580.)

MILITARY INTERESTS:

Custodians:

Army - GL
Navy - SA

Review Activities:

Army - MD
Navy - NU, MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

(Project 8415-0042)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

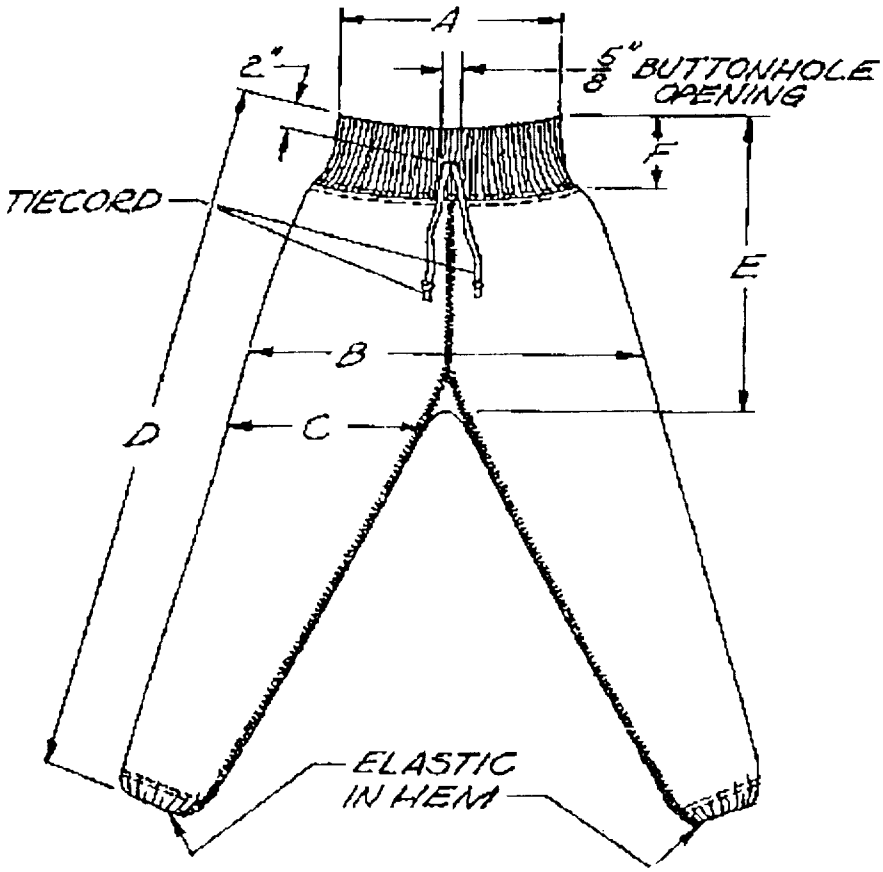


FIGURE 1. Sweat Pants

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.