INCH-POUND

MIL-DTL-52525/25B
30 June 1998
SUPERSEDING
MIL-F-52525/25A
30 June 1987

DETAIL SPECIFICATION SHEET

FITTINGS, HOSE, CLAMP-ON TO 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, SHORT DROP, TYPE 100R10

This specification is approved for use by all Departments and Agencies of the department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52525. The fittings described herein are for use with MIL-DTL-52471, type 100R10, 4-spiral-wrap hose.

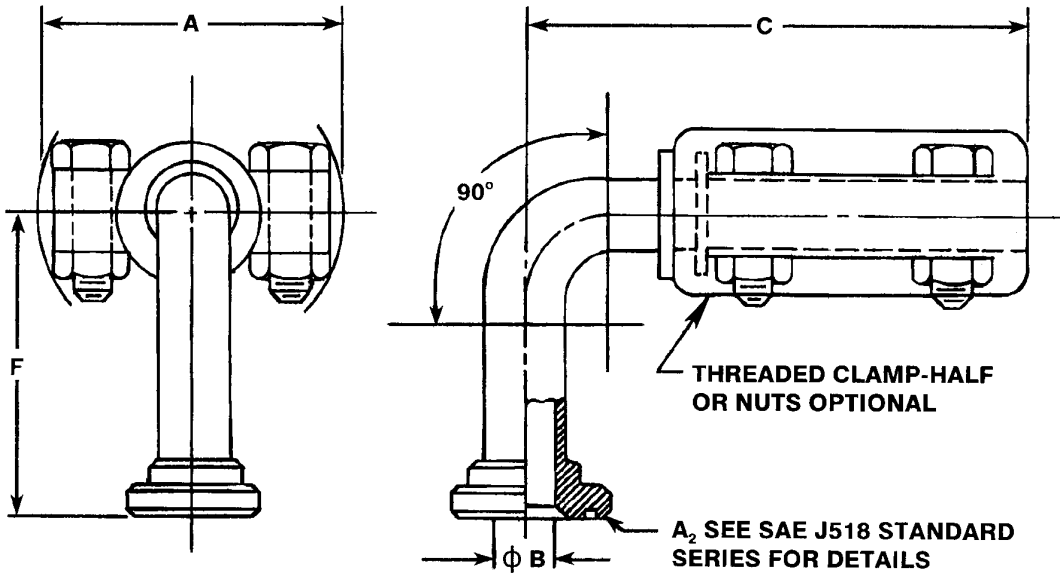

FIGURE 1. Fitting, clamp-on to 4-bolt split-flange, 90° bent tube, short drop.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for type 100R10 fittings, 90° bent tube, short drop.

Part number	Hose size	Hose dash size	A_2 Flange size	Flange dash size	A Max	B Min	C Max	F Max
M52525/25-16-16	1	16	1	16	4.69	0.75	6.06	2.44
M52525/25-20-20	1-1/4	20	1-1/4	20	4.96	1.00	6.18	2.94
M52525/25-24-24	1-1/2	24	1-1/2	24	5.50	1.25	6.75	3.44
M52525/25-32-32	2	32	2	32	6.68	1.68	9.57	4.94

TABLE II. Maximum operating pressures of fittings.

Hose I.D.	PSI
1	4000
1-1/4	3000
1-12	2500
2	2500

REQUIREMENTS:

1. Fittings shall be in accordance with figure 1 and tables I and II.

2. Materials and finishes shall be as specified in MIL-DTL-52525.

3. Marking shall include the manufacturer's name or trademark, size, and hose identifier R10. Location of marking is optional.

NOTES:

1. Dimensions are in inches.

2. Part number.

Example of a Military part number: M52525/25-16-16

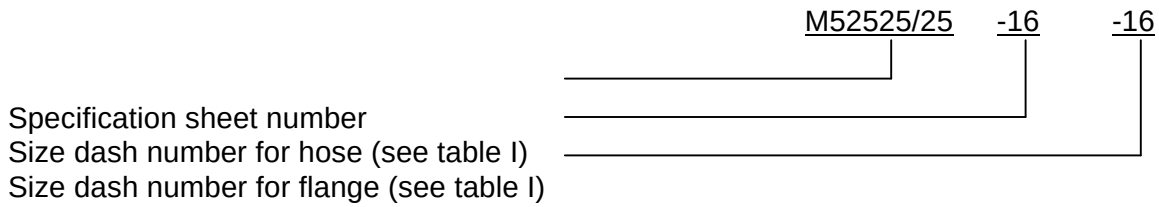

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Army - AT
Air Force - 99

Preparing activity:
DLA - CC

(Project 4730-0859-20)

Review activities:
Air Force - 82
Army - AR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:23Z
Check the source to verify that this is the current version before use.