FF-H-106/3
July 19, 1974


FEDERAL SPECIFICATION SHEET

FEDERAL SPECIFICATION

HARDWARE, BUILDERS'; LOCKS AND DOOR TRIM: LETTER BOX PLATES

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal Agencies.

The complete requirements for procuring the letter box plates described herein shall consist of this document and the issue in effect of Specification FF-H-106/GEN.

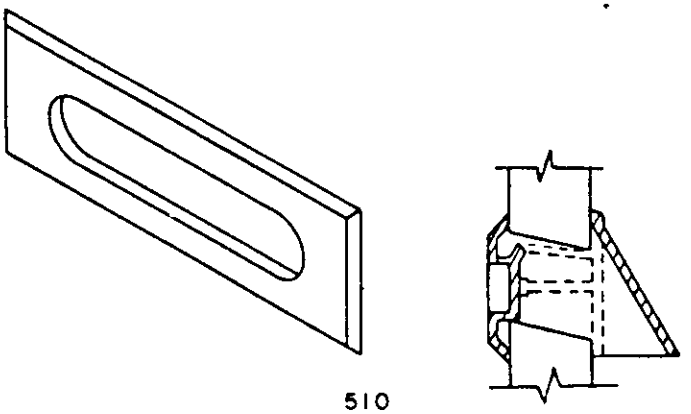

510

REQUIREMENTS:

Description: See above figure.

Type 510. For office doors. For horizontal installation unless required for vertical application. Cast bronze, with cast or wrought brass or bronze chute extending through door. Plain design with rounded, beveled, or square corners and edges.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.

Hooded back plate or hinged door on inside at option of supplier. Opening in plates shall be rectangular and not less than 1-1/2" x 7". Opening in outside plate shall be closed by a spring flap hinged to swing up when placed horizontally and to the side when placed vertically. When pushed back, flap shall not obstruct the 1-1/2" x 7" opening. Size of chute shall conform to plate opening. Minimum projection of hood (if used) beyond face of door shall be 2-1/16". Outer edge of hood (if used) shall extend not more than 3/4" below slot in outside plate if placed horizontally, or not more than 3/4" beyond slot in outside plate if placed vertically. Plates shall be attached to each other by not less than two machine screws passing through door with heads in inside plate.

Type 511. Plain design. Same as type 510, except with open back plate instead of hooded back plate.

Type 515. For residential doors. Plain design, wrought bronze. Plates approximately 3" x 10" with clear opening not less than 1-1/2" x 7"; minimum thickness 0.040". Inside plate without hood. Outside plate with spring flap. For horizontal application unless required for vertical application.

Instructions: Complete installation instructions, and templates for installation on metal doors, shall be furnished by supplier.

MILITARY CUSTODIANS:
Army - WC
Navy - YD
Air Force - 82

Preparing activity:
Navy - YD

Civil Agency Coordinating Activity:
VA - DMS

Reveiw activity:
DSA - IS

User activity:
Army - ME

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:44Z
Check the source to verify that this is the current version before use.