INCH-POUND

A-A-55099
16 December 1992

COMMERCIAL ITEM DESCRIPTION

ROD, INSECT BAR

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-R-2341.

Abstract This commercial item description covers a rod and clamp assembly used in supporting insect bars over certain types of military beds and cots

Salient Characteristics The construction of the rod and clamp, the wing nut, the upright and crossbar, and the ring shall be in accordance with Figures 1, 2 and 3. The clamp assembly, body and clip shall be manufactured from commercial quality, cold-rolled, carbon steel sheeting. The bolt, upright and crossbar shall be manufactured from merchant quality, carbon steel bar

Materials.

Steel, sheet and strip The sheet material shall be hot or cold rolled, commercial quality The steel strip shall be hot-rolled commercial quality or cold-rolled tempered The sheet and steel strip shall be in accordance with ASTM A 505 (Standard Specification for Stainless Steel and Strip, Hot-Rolled and Cold-Rolled, General Requirements for)

Steel bars, carbon The carbon steel bars shall conform to grades 101 through 1020 of ASTM A 108 (Aluminum-Alloy Permanent Mold Castings)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Primer. The primer shall be a quick-drying, corrosion-inhibiting, high solids alloyed primer for pretreated ferrous and nonferrous metals The primer shall be lead and chromate free and contain no more than 420 grams per liter of volatile organic compounds (VOC), as applicable

Enamel The enamel shall be an air-drying, semi-gloss enamel for use on primed exterior and interior metal and wood surfaces The enamel is lead and chromate-free and meets the air pollution requirements for solvent emission. The enamel color shall be Olive Drab No. 24084

Coatings. As an alternate to the primer and enamel, the rod and clamp assembly may be coated with the standard Corvell ECA-1555-FC3 Epoxy Coating, Duracon Super 600, or equal

Finish

Clamps The clamp body, clip, bolt, and wing nut shall be thoroughly cleaned and electro-zinc plated and chromated in accordance with ASTM B 633 (Zinc On Iron & Steel, Electrodeposited Coatings Of)

Rods All rod surfaces shall be prepared for painting by any method, and treated with zinc phosphate or iron phosphate. The prepared rod surfaces shall be given one coat of primer, and thoroughly dried prior to application of the enamel. The primed surfaces of the insect bar rod shall be coated with enamel and baked

Instruction sheet. An instruction sheet illustrating the methods of mounting the insect bar clamps on various types of beds shall be packed with each box of four clamps

Workmanship The finished rod and clamp assembly shall conform to the quality of the product established by this document All sharp edges and corners shall be broken

Product Demonstration Model When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Quality Assurance

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Rod and clamp assemblies shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1 4, published by the American Society for Quality Control

Visual Examination The rod and clamp assembly shall be examined for the defects listed below The lot size shall be expressed in units of rod and clamp assemblies The sample unit is one rod and clamp assembly The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1 0

Defects The rod and clamp assembly shall be examined for the following defects: enameled or epoxy coating not finished, wrong color, area of no film, or not smooth, uniform, or adherent; surfaces not plated, no uniform plating, area of no plating, or dirt or foreign matter imbedded; any inoperative functioning component; any ring missing or not specified; any component missing; component not in proper alignment, broken, fractured or split; any sharp edge, burr, or sliver; any corners on clamp not rounded as indicated; hole not the proper size; any end of bar not chamfered as required; any sharp corners not broken or rounded where required; label missing, incomplete, illegible, not of specified type or size, not affixed in the prescribed manner or otherwise incorrect

Dimensional Examination The finished rod and clamp assembly shall conform to the dimensions specified Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one rod and clamp assembly; the inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container
Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Regulatory Requirements The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable

Preservation, Packing, and Marking The preservation, packing, and marking shall be as specified in the contract or order

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 1430 Broadway, New York, NY 10018-3308)

ASTM A-108 - Aluminum-Alloy Permanent Mold Castings

ASTM A-505 - Standard Specification for Stainless Steel and Strip, Hot-Rolled and Cold-Rolled, General Requirements for.

ASTM B-633 - Zinc On Iron and Steel, Electrodeposited Coatings Of

(Applications for copies shall be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187)

Custodians:

Army - GL
Air Force - 99

Review Activities:

Army - MD
Air Force - 82

User Activities:


Navy, YD, NU

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA -CT

Project No 7210-0308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

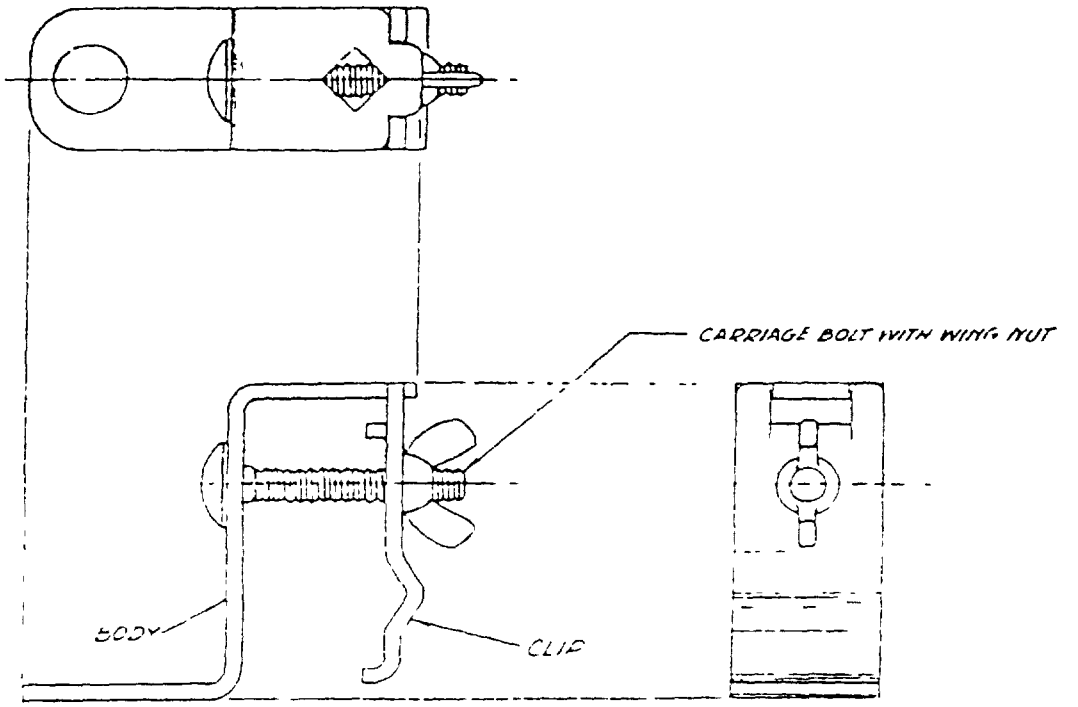


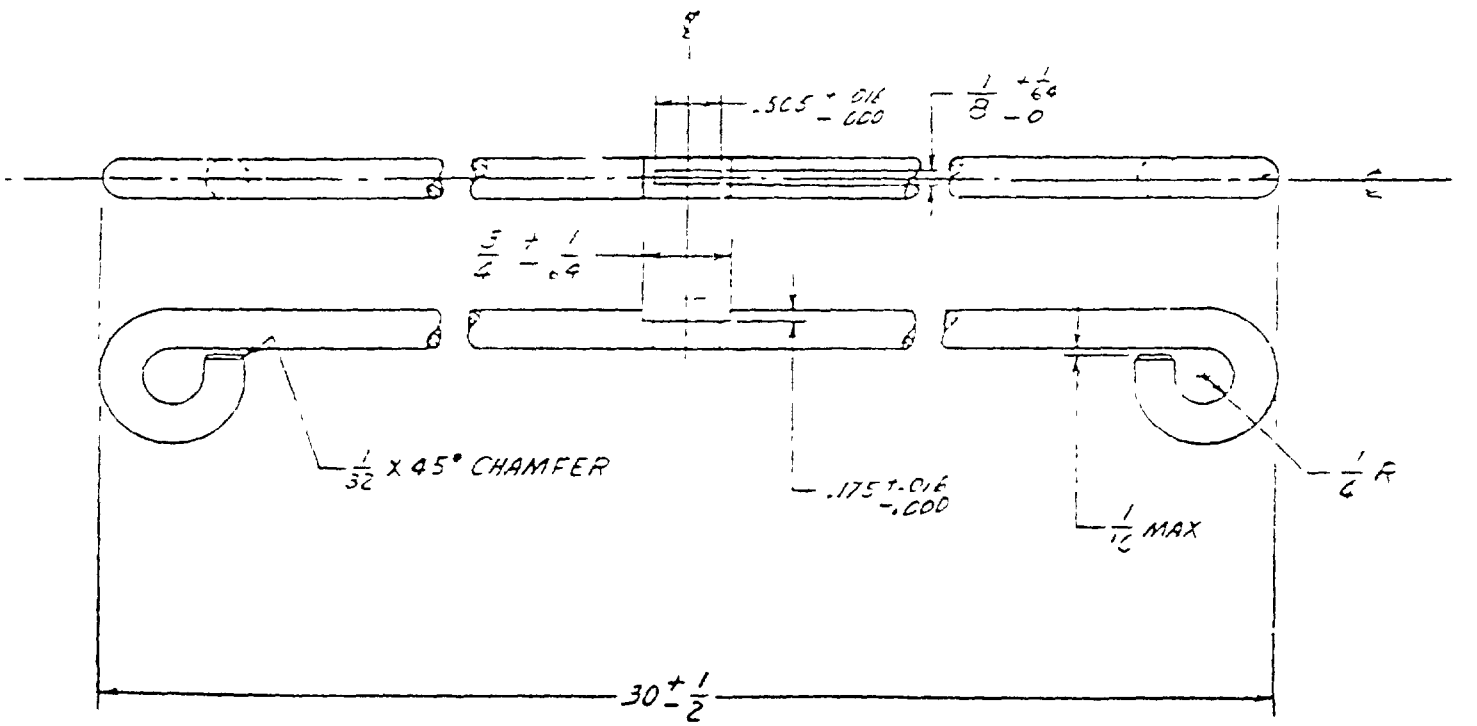


FIGURE 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

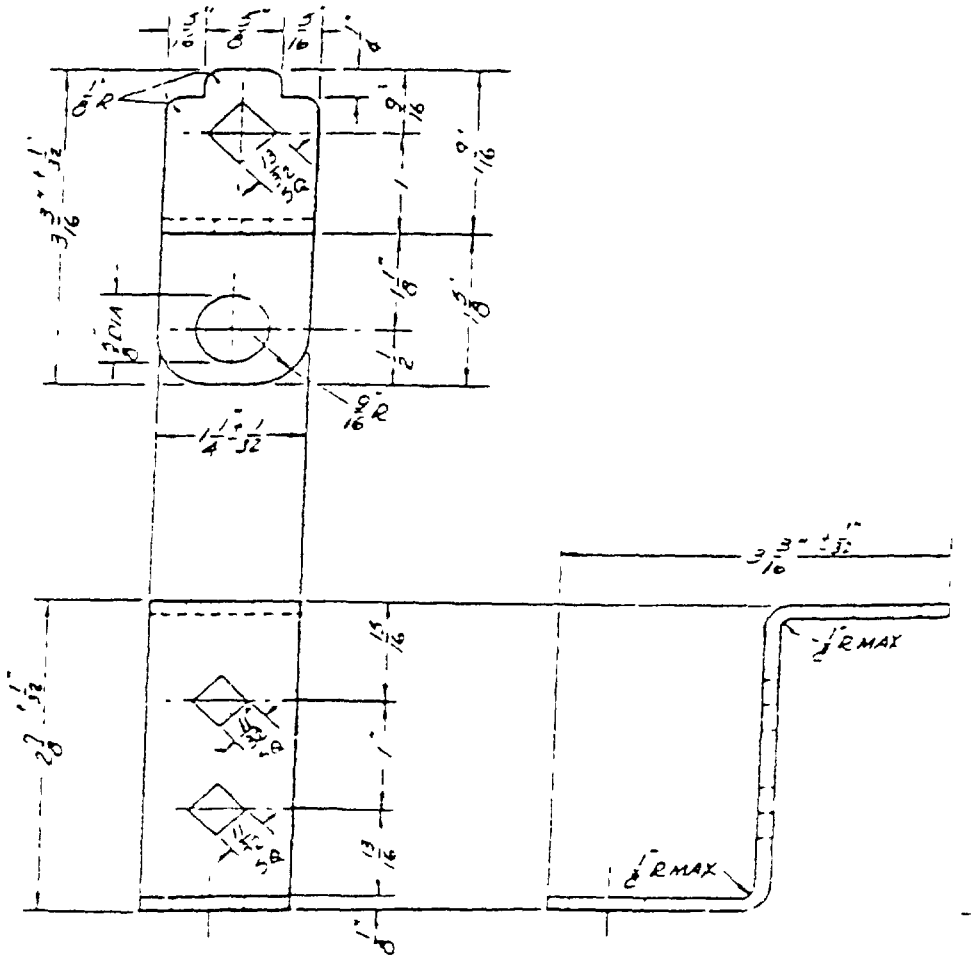


BODY
Matl, Steel
1-Req'd

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

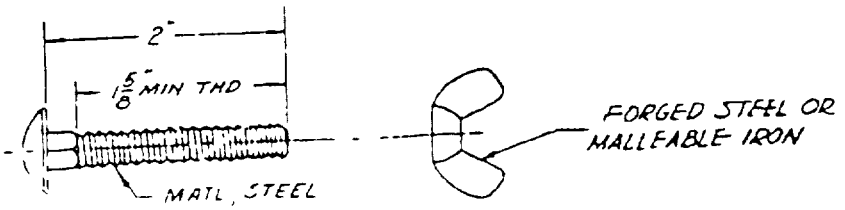

BOLT, CARRIAGE WITH NUT, WING
5/16 Dia -18 Unc-Cl 24
1-Req'd

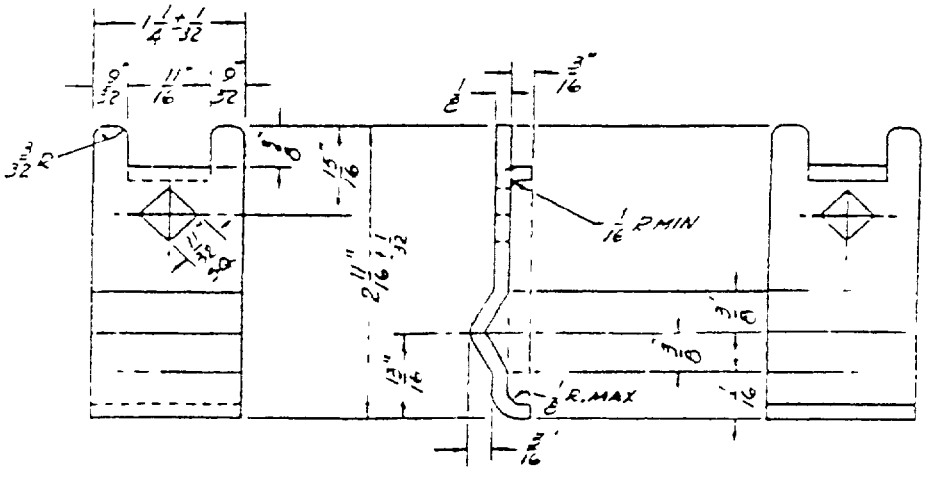

CLIP
Matl Steel
1-Req'd

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2 3, and 8 In block 1, both the document number and revisior letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification o requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER A-A-55099	2 DOCUMENT DATE (YYMMDD) 92-12-16

3 DOCUMENT TITLE
ROD, INSECT BAR

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a NAME (Last, First, Middle Initial)	b ORGANIZATION	
c ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7 DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b TELEPHONE (Include Area Code) (1) Commercial 215-737-8105 (2) AUTOVON 444-8105
c ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.